

, venis. Donec aliquet, tortor sed accumsan  
iac orci et nisl hendrerit mollis. Suspendisse ut massa.  
e. Pellentesque a nulla. Cum sociis natoque penatibus  
arturient montes, nascetur ridiculus mus. Aliquam  
illa ullamcorper vestibulum turpis. Pellentesque

smod sodales, sollicitudin vel, wisi.  
am lacus libero, pretium at, lo-  
er aliquet, tortor sed accumsan  
vita ornare odio metus a  
Suspendisse ut massa.  
iis natoque penatibus  
lus mus. Aliquam  
is. Pellentesque

colorbox 6.7.1  
Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi.  
Morbi auctor lorem non justo. Nam lacus libero, pretium at, lo-  
bortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan  
bibendum, erat ligula aliquet magna, vita ornare odio metus a  
mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa.  
Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus  
et magnis dis parturient montes, nascetur ridiculus mus. Aliquam  
tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque

colorbox 6.7.1  
Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi.  
Morbi auctor lorem non justo. Nam lacus libero, pretium at, lo-  
bortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan  
bibendum, erat ligula aliquet magna, vita ornare odio metus a  
mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa.  
Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus  
et magnis dis parturient montes, nascetur ridiculus mus. Aliquam  
tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque

colorbox 6.7.1  
Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi.  
Morbi auctor lorem non justo. Nam lacus libero, pretium at, lo-  
bortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan  
bibendum, erat ligula aliquet magna, vita ornare odio metus a  
mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa.  
Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus  
et magnis dis parturient montes, nascetur ridiculus mus. Aliquam  
tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque

colorbox 6.7.1  
Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi.  
Morbi auctor lorem non justo. Nam lacus libero, pretium at, lo-  
bortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan  
bibendum, erat ligula aliquet magna, vita ornare odio metus a  
mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa.  
Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus  
et magnis dis parturient montes, nascetur ridiculus mus. Aliquam  
tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque

### colorbox 6.7.1

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi.  
Morbi auctor lorem non justo. Nam lacus libero, pretium at, lo-  
bortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan  
bibendum, erat ligula aliquet magna, vita ornare odio metus a  
mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa.  
Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus  
et magnis dis parturient montes, nascetur ridiculus mus. Aliquam  
tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque

### colorbox 6.7.1

### colorbox 6.7.1

Manual for  
version  
6.7.1  
(2025/07/08)

### colorbox 6.7.1

Thomas F. Sturm

### colorbox 6.7.1

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi.  
Morbi auctor lorem non justo. Nam lacus libero, pretium at, lo-  
bortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan  
bibendum, erat ligula aliquet magna, vita ornare odio metus a  
mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa.  
Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus  
et magnis dis parturient montes, nascetur ridiculus mus. Aliquam  
tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque

### Cover code

```
% \usepackage{incgraph}
\begin{incontext}
\begin{tikzpicture}
\definecolorseries{boxcol}{rgb}{last}{blue}{red}
\resetcolorseries[28]{boxcol}
\coordinate (A) at (0,0); \coordinate (B) at (21,29.7);
\path[use as bounding box] (A) rectangle coordinate (C) (B);
\node[transform shape,xslant=0.7,rotate=-10,xshift=0cm] at (C) {%
  \BeginAccSupp{method=plain,ActualText={}}%
  \begin{tcbraster}[raster columns=4,title=tcolorbox \version,
    fonttitle=\small\bfseries,raster width=50cm]
  \foreach \b in {1,...,28} {\begin{tcolorbox}[enhanced,
    watermark text=\thetcbasternum,
    colframe=boxcol!30!white,
    colback=boxcol!25!white!30!white,
    colbacktitle=boxcol!!+!50!black!30!white,
    colupper=black!30!white]\lipsum[2]\end{tcolorbox}}
  \end{tcbraster}%
  \EndAccSupp{}%
};
\node at (C) {%
  \begin{tcbitemize}[title=tcolorbox \version,fonttitle=\small\bfseries,
    enhanced jigsaw,opacityback=0.5,opacitybacktitle=0.75,
    halign=center,valign=center,arc=5mm,
    raster width=16cm,raster column skip=8mm,raster halign=center,
    raster force size=false,
    raster row 1/.style={height=6cm},
    raster row 2/.style={width=6cm,height=4cm},
    raster column 1/.style={flushright title,
      frame style={left color=yellow!50!black,right color=green!50!black},
      title style={left color=yellow!50!blue,right color=blue!50!green!50!black},
      interior style={left color=yellow!70,right color=green!70},
      underlay={\draw[line width=6mm,line cap=round,black!60]
        ([shift={(0.4,-0.15)}]frame.north east)
        --([shift={(0.4,0.15)}]frame.south east); }},
    raster column 2/.style={%
      frame style={left color=green!50!black,right color=yellow!50!black},
      title style={left color=blue!50!green!50!black,right color=yellow!50!blue},
      interior style={left color=green!70,right color=yellow!70}}]
  \tcbitem[fontupper=\Huge\bfseries,sharp corners=east,
    underlay={\draw[line width=6mm,line cap=round,black!60]
      ([shift={(0.4,0.30)}]frame.north east)-- coordinate(A) +(0,0.2);
      \draw[line width=1mm,line cap=round,black!60](A) -- +(30:1.5cm);
      \draw[line width=1mm,line cap=round,black!60](A) -- +(150:1.5cm);}]
  tcolorbox
  \tcbitem[fontupper=\large\bfseries,sharp corners=west]
  Manual for \version \version \\ (\datum)
  \tcbitem[sharp corners=northeast]
  \tcbitem[sharp corners=northwest] Thomas F.~Sturm
  \end{tcbitemize}%
};
\end{tikzpicture}
\end{incontext}
```

# The `tcolorbox` package

Manual for version 6.7.1 (2025/07/08)

Thomas F. Sturm<sup>1</sup>

<https://www.ctan.org/pkg/tcolorbox>

<https://github.com/T-F-S/tcolorbox>

## Abstract

`tcolorbox` provides an environment for colored and framed text boxes with a heading line. Optionally, such a box can be split in an upper and a lower part. The package `tcolorbox` can be used for the setting of L<sup>A</sup>T<sub>E</sub>X examples where one part of the box displays the source code and the other part shows the output. Another common use case is the setting of theorems. The package supports saving and reuse of source code and text parts.

## Contents

<b>1</b>	<b>Introduction</b>	<b>8</b>
1.1	Installation . . . . .	8
1.2	Loading the Package . . . . .	8
1.3	Libraries . . . . .	9
<b>2</b>	<b>Quick Reference</b>	<b>11</b>
<b>3</b>	<b>Macros for Box Creation</b>	<b>12</b>
3.1	Using <code>tcolorbox</code> and <code>\tcbox</code> . . . . .	12
3.2	Producing <code>tcolorbox</code> Environments and Commands . . . . .	16
3.3	Producing <code>\tcbox</code> Commands . . . . .	20
3.4	Redefining other Environments (Wrapping with <code>tcolorbox</code> ) . . . . .	23
<b>4</b>	<b>Option Keys</b>	<b>24</b>
4.1	Title . . . . .	24
4.2	Subtitle . . . . .	27
4.3	Upper Part . . . . .	28
4.4	Lower Part . . . . .	30
4.5	Colors and Fonts . . . . .	34
4.6	Text Alignment . . . . .	37
4.7	Geometry . . . . .	41
4.7.1	Width . . . . .	41
4.7.2	Rules . . . . .	42
4.7.3	Arcs . . . . .	43
4.7.4	Spacing . . . . .	46
4.7.5	Size Shortcuts . . . . .	51
4.7.6	Toggle Left and Right . . . . .	53
4.8	Corners . . . . .	55

<sup>1</sup>Prof. Dr. Dr. Thomas F. Sturm, Institut für Mathematik und Informatik, University of the Bundeswehr Munich, D-85577 Neubiberg, Germany; email: [thomas.sturm@unibw.de](mailto:thomas.sturm@unibw.de)

4.9	Transparency . . . . .	58
4.10	Height Control . . . . .	60
4.11	Box Content Additions . . . . .	71
4.12	Overlays . . . . .	83
4.13	Floating Objects . . . . .	88
4.14	Embedding into the Surroundings . . . . .	90
4.15	Bounding Box . . . . .	97
4.15.1	Shifting Bounding Box Borders . . . . .	97
4.15.2	Box Alignment . . . . .	100
4.15.3	Toggle Enlargements . . . . .	101
4.15.4	Spread Box to Page Borders . . . . .	102
4.15.5	Box Extrusion . . . . .	104
4.16	Layered Boxes and Every Box Settings . . . . .	106
4.17	Capture Mode . . . . .	109
4.18	Text Characteristics . . . . .	110
4.19	Files . . . . .	111
4.20	\tcbbox Specials . . . . .	112
4.21	Counters, Labels, and References . . . . .	114
4.22	Even and Odd Pages . . . . .	118
4.23	Externalization . . . . .	122
4.24	Miscellaneous . . . . .	123
<b>5</b>	<b>Initialization Option Keys</b>	<b>128</b>
5.1	Numbered Boxes . . . . .	128
5.2	Lists of \colorboxes . . . . .	135
<b>6</b>	<b>Side by Side</b>	<b>138</b>
6.1	Basic Settings . . . . .	138
6.2	Advanced Settings . . . . .	144
<b>7</b>	<b>Saving and Loading of Verbatim Texts</b>	<b>148</b>
<b>8</b>	<b>Recording</b>	<b>151</b>
8.1	Macros . . . . .	151
8.2	Options . . . . .	151
8.3	Example: Exercises . . . . .	152
8.4	Example: Solutions . . . . .	155
<b>9</b>	<b>Technical Overview and Customization</b>	<b>157</b>
9.1	Skins and Drawing Engines . . . . .	157
9.2	Code Option Keys . . . . .	161
9.3	Subskins . . . . .	164
9.4	Drawing Scheme . . . . .	165
9.5	Color Names . . . . .	169
9.6	Useful Properties . . . . .	170
<b>10</b>	<b>Library <small>LB</small> skins</b>	<b>172</b>
10.1	Style Option Keys . . . . .	172
10.2	Boxed Title Option Keys . . . . .	180
10.2.1	Boxed Title Placement . . . . .	180
10.2.2	Options for the Boxed Title Placement . . . . .	183
10.2.3	Options for the Boxed Title Box . . . . .	184

10.3	Watermark Option Keys . . . . .	191
10.4	Clip Environments . . . . .	198
10.5	Border Line Option Keys . . . . .	203
10.6	Shadow Option Keys . . . . .	208
10.6.1	Common Shadows and Halos . . . . .	208
10.6.2	Lifted Shadows . . . . .	213
10.6.3	Generic Shadows . . . . .	214
10.6.4	TikZ Shadows . . . . .	217
10.7	TikZ Picture Option Keys . . . . .	218
10.8	Underlay Option Keys . . . . .	221
10.9	Finish Option Keys . . . . .	223
10.10	Hyper Option Keys . . . . .	225
10.11	Jigsaw Skin Variants . . . . .	227
10.12	Draft Mode . . . . .	229
<b>11</b>	<b>Library  skins - Catalog of Skins</b>	<b>231</b>
11.1	Skin Family “standard” . . . . .	233
11.2	Skin Family “enhanced” . . . . .	235
11.3	Skin Family “bicolor” . . . . .	247
11.4	Skin Family “tile” . . . . .	258
11.5	Skin Family “beamer” . . . . .	262
11.6	Skin Family “widget” . . . . .	266
11.7	Skin Family “empty” . . . . .	269
11.8	Skin “spartan” . . . . .	279
11.9	Skin “draft” . . . . .	280
11.10	Skin Family “freelance” . . . . .	282
<b>12</b>	<b>Inclusion of Boxed Image Files</b>	<b>283</b>
12.1	Macros . . . . .	283
12.2	Option Keys . . . . .	286
<b>13</b>	<b>TikZ Auxiliary Macros</b>	<b>288</b>
13.1	Straightening of the Arcs . . . . .	288
13.2	Extracting Node Dimensions . . . . .	289
13.3	Hyper Nodes . . . . .	289
<b>14</b>	<b>Beamer Support</b>	<b>290</b>
<b>15</b>	<b>Library  vignette</b>	<b>298</b>
15.1	Vignette Drawing . . . . .	298
15.2	Generic Geometry Settings . . . . .	299
15.3	Generic Color and Style Settings . . . . .	301
15.4	Generic Fading Settings . . . . .	303
15.5	Vignette as Underlay . . . . .	306
15.6	Vignette as Finish . . . . .	308
<b>16</b>	<b>Library  raster</b>	<b>311</b>
16.1	Concept of Rasters . . . . .	311
16.2	Macros of the Library . . . . .	313
16.3	Option Keys of the Library . . . . .	317
16.4	Adding Styles for Specific Boxes . . . . .	323
16.5	Combining Columns or Rows . . . . .	325
16.6	Rasters inside Rasters . . . . .	328

16.6.1 Raster Setup . . . . .	328
16.6.2 Placing Spaces . . . . .	329
<b>17 Libraries <code>\lib{listings}</code>, <code>\lib{listingsutf8}</code>, and <code>\lib{minted}</code></b>	<b>333</b>
17.1 Loading the Libraries . . . . .	333
17.1.1 Loading <code>\lib{listings}</code> . . . . .	333
17.1.2 Loading <code>\lib{listingsutf8}</code> . . . . .	333
17.1.3 Loading <code>\lib{minted}</code> . . . . .	334
17.2 Common Macros of the Libraries . . . . .	334
17.3 Producing <code>tcblisting</code> Environments . . . . .	337
17.4 Producing <code>\tcbinputlisting</code> Commands . . . . .	341
17.5 Option Keys of the <code>\lib{listings}</code> Library . . . . .	343
17.6 Option Keys of the <code>\lib{listingsutf8}</code> Library . . . . .	345
17.7 Option Keys of the <code>\lib{minted}</code> Library . . . . .	346
17.8 Common Option Keys of all Libraries . . . . .	348
17.9 Option Keys for Processing and Full Document Examples . . . . .	358
17.10 Creation of L <sup>A</sup> T <sub>E</sub> X Tutorials . . . . .	366
17.11 Creation of L <sup>A</sup> T <sub>E</sub> X Exercises . . . . .	373
17.12 List of Exercises . . . . .	376
17.13 Solutions for the given L <sup>A</sup> T <sub>E</sub> X Exercises . . . . .	377
<b>18 Library <code>\lib{theorems}</code></b>	<b>379</b>
18.1 Macros of the Library . . . . .	379
18.2 Option Keys of the Library . . . . .	384
18.3 Examples for Definitions and Theorems . . . . .	400
18.4 Using other theorem environments with <code>tcolorbox</code> . . . . .	405
<b>19 Library <code>\lib{breakable}</code></b>	<b>406</b>
19.1 Technical Overview . . . . .	406
19.2 Limitations and Known Bugs . . . . .	407
19.3 Main Option Keys . . . . .	408
19.4 Option Keys for the Break Appearance . . . . .	413
19.5 Extra Options for Partial Boxes . . . . .	415
19.6 Breakable boxes and the <code>multicol</code> package . . . . .	418
19.7 Break Point Insertion . . . . .	421
19.8 Break Sequence for the Skins . . . . .	422
19.9 Break by Hand (Faked Break) . . . . .	432
<b>20 Library <code>\lib{magazine}</code></b>	<b>433</b>
20.1 Creation and Resetting of Box Arrays . . . . .	433
20.2 Storing Content . . . . .	434
20.3 Retrieving Content . . . . .	436
20.4 Box Dimensions . . . . .	439
20.5 Leaflet Example . . . . .	441
<b>21 Library <code>\lib{poster}</code></b>	<b>443</b>
21.1 Overview . . . . .	443
21.2 Main Poster Environment . . . . .	444
21.3 Poster Settings . . . . .	446
21.4 Coverage . . . . .	447
21.5 Common Box Settings . . . . .	448
21.6 Font Scaling . . . . .	448

21.7 Box Placement . . . . .	449
<b>22 Library <small>LIB</small> fitting</b>	<b>457</b>
22.1 Macros of the Library . . . . .	457
22.2 Producing \tcbboxfit Commands . . . . .	459
22.3 Option Keys of the Library . . . . .	462
<b>23 Library <small>LIB</small> hooks</b>	<b>471</b>
23.1 Concept of Hooks . . . . .	471
23.2 Box Content Additions . . . . .	472
23.3 Embedding into the Surroundings . . . . .	475
23.4 Overlays . . . . .	476
23.5 Watermarks . . . . .	478
23.6 Underlays . . . . .	480
23.7 Finishes . . . . .	481
23.8 Skin Code . . . . .	481
23.9 Extras . . . . .	483
23.10 Listings . . . . .	483
<b>24 Library <small>LIB</small> xparse</b>	<b>484</b>
<b>25 Library <small>LIB</small> external</b>	<b>485</b>
25.1 Preparation of a Document for Externalization . . . . .	486
25.2 Marking Externalization Snippets . . . . .	487
25.3 Customization . . . . .	492
25.4 Troubleshooting and FAQ . . . . .	496
<b>26 Library <small>LIB</small> documentation</b>	<b>497</b>
26.1 Macros of the Library . . . . .	497
26.2 Entry Content Option Keys . . . . .	511
26.3 Entry Customization Option Keys . . . . .	515
26.4 General Customization Option Keys . . . . .	520
26.5 Language Option Keys . . . . .	524
26.6 Predefined Colors of the Library . . . . .	525
<b>A Picture Credits</b>	<b>526</b>
<b>References</b>	<b>527</b>
<b>Index</b>	<b>529</b>

# 1 Introduction

The package originates from the first edition of my book «*LATEX – Einführung in das Textsatzsystem*» [19] in about 2006. For the LATEX examples and tutorials given there, I wanted to have accentuated and colored boxes to display source code and compiled text in combination. Since, in my opinion, this type of boxes is also quite useful to highlight definitions and theorems, I applied them for my lecture notes in mathematics [20–22] as well. With this package, you are invited to apply these boxes for similar projects.

The breaking news for version 2.00 was the support for breakable boxes. This feature allows new applications of the package without affecting the core package too much if you do not need boxes to break automatically. With version 2.20, the often requested “side by side” mode for listings has been added. With version 3.00, boxed titles are introduced together with improved customization options for overlays, underlays, finishes, and own code extensions.

Since the first public release in 2011, I received a lot of feedback from all over the world. I want to thank all who wrote me for supporting this package by sending bug reports and ideas for new or better features.



## 1.1 Installation

Typically, `tcolorbox` will be installed as part of a major LATEX distribution and there is nothing special to do for a user.

If you intend to make a local installation *by hand*, see the `README` file of the `tcolorbox` package for some hints. The short story is: you have to install not only `tcolorbox.sty`, but also all `*.code.tex` files in the local `texmf` tree.

## 1.2 Loading the Package

The base package `tcolorbox` loads the packages `tikz` [23], `verbatim` [18], `etoolbox` [7], and `environ` [17]. `tcolorbox` itself is loaded in the usual manner in the preamble:

```
\usepackage{tcolorbox}
```

The package takes option keys in the key-value syntax. Alternatively, you may use these keys later in the preamble with `\tcbuselibrary`<sup>P.9</sup> (see there). For example, the key to typeset listings is:

```
\usepackage[listings]{tcolorbox}
```

### 1.3 Libraries

The base package `tcolorbox` is extendable by program libraries. This is done by using option keys while loading the package or inside the preamble by applying the following macro with the same set of keys.

`\tcbuselibrary{<key list>}`

Loads the libraries given by the `<key list>`.

`\tcbuselibrary{listings, theorems}`

The following keys are used inside `\tcbuselibrary` respectively `\usepackage` without the key tree path `/tcb/library/`.

`/tcb/library/skins`

(LIB skins)

Loads the package `tikzfill.image`<sup>→ CTAN</sup> and provides additional styles (skins) for the appearance of the colored boxes; see Section 10 from page 172.

`/tcb/library/vignette`

(LIB vignette)

Provides code for more ornamental; see Section 15 from page 298.

`/tcb/library/raster`

(LIB raster)

Provides additional macros and options for typesetting multiple boxes arranged in a kind of raster; see Section 16 from page 311.

`/tcb/library/listings`

(LIB listings)

Loads the package `listings`<sup>→ CTAN</sup> [6] and provides additional macros for typesetting listings which are described in Section 17 from page 333.

`/tcb/library/listingsutf8`

(LIB listingsutf8)

Loads the packages `listings`<sup>→ CTAN</sup> [6] and `listingsutf8` [10] for UTF-8 support. This is a variant of the library `listings` and is described in Section 17 from page 333.

`/tcb/library/minted`

(LIB minted)

Loads the package `minted`<sup>→ CTAN</sup> [13] to typeset listings with the `Pygments` [15] tool, also see 17 on page 333.

`/tcb/library/theorems`

(LIB theorems)

Provides additional macros for typesetting theorems which are described in Section 18 from page 379.

`/tcb/library/breakable`

(LIB breakable)

Provides support for automatic box breaking from one page to another; see Section 19 on page 406.

`/tcb/library/magazine`

(LIB magazine)

Provides support for storing broken box parts to be used later or in interchanged order, Section 20 on page 433.

`/tcb/library/poster`

(LIB poster)

Provides support for creating posters, Section 21 on page 443.

`/tcb/library/fitting`

(LIB fitting)

Provides support for font size adaption of the box content to the box dimensions; see Section 22 from page 457.

`/tcb/library/hooks`

(LIB hooks)

Extends several option keys to “hookable” keys; see Section 23 from page 471.

### /tcb/library/xparse

(LIB xparse)

Loads the package `xparse` → CTAN and is considered a legacy library kept for compatibility; see Section 24 from page 484.

### /tcb/library/external

(LIB external)

Provides externalization support for stand-alone document snippets, see Section 25 on page 485.

### /tcb/library/documentation

(LIB documentation)

Provides additional macros for typesetting LATEX documentations which are described in Section 26 from page 497.

### /tcb/library/many

(style, no value)

Loads the libraries LIB skins, LIB breakable, LIB raster, LIB hooks, LIB theorems, and LIB fitting. Use this shortcut, if you want to use all features of `tcolorbox` with exception of typesetting listings and using the specialized LIB documentation library.

### /tcb/library/most


(style, no value)

Loads all libraries except LIB minted, LIB documentation, and LIB xparse. Use this shortcut, if you want to use all features of `tcolorbox` with exception of using the `minted` → CTAN package and using the specialized LIB documentation library.


### /tcb/library/all

(style, no value)

Loads all libraries. Use this shortcut only, if you intend to use the LIB documentation library.

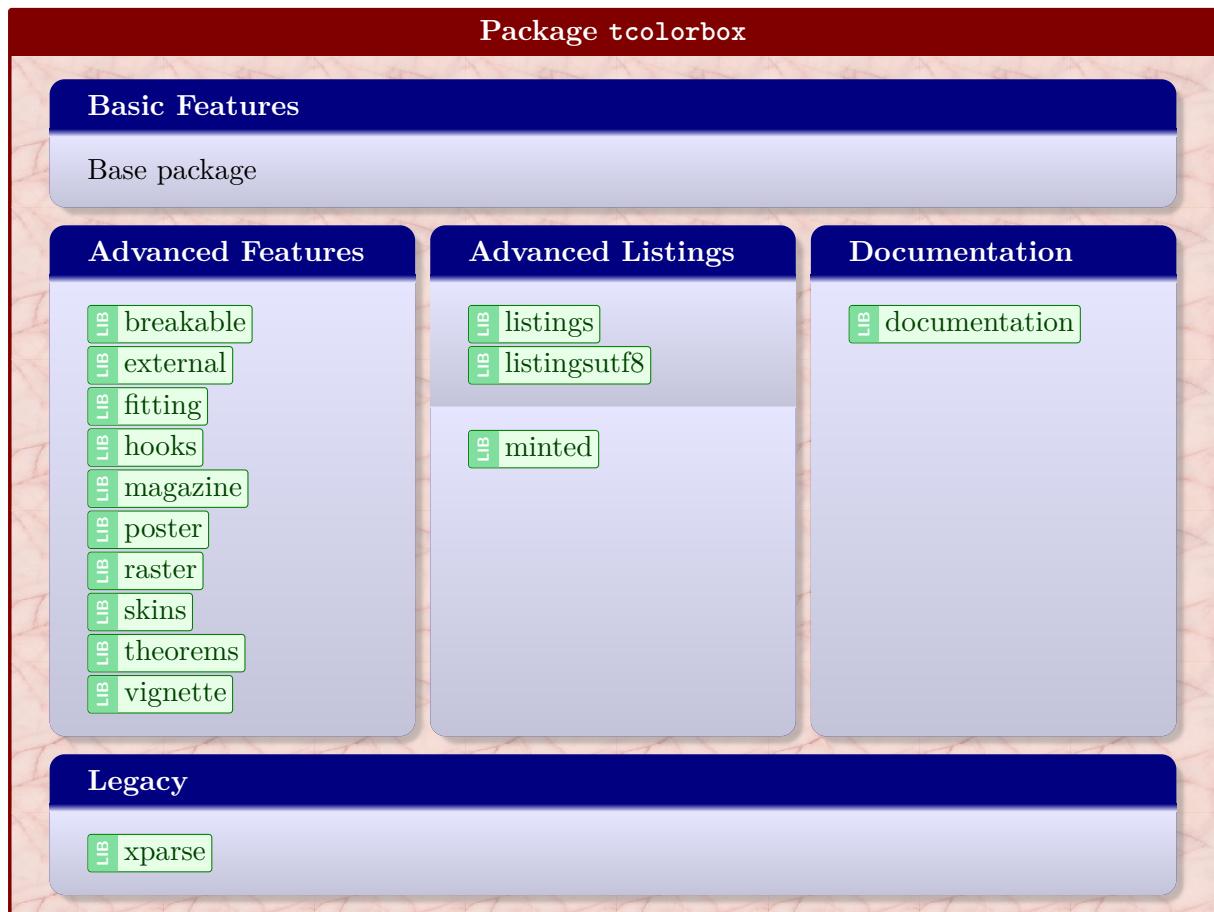

## 2 Quick Reference

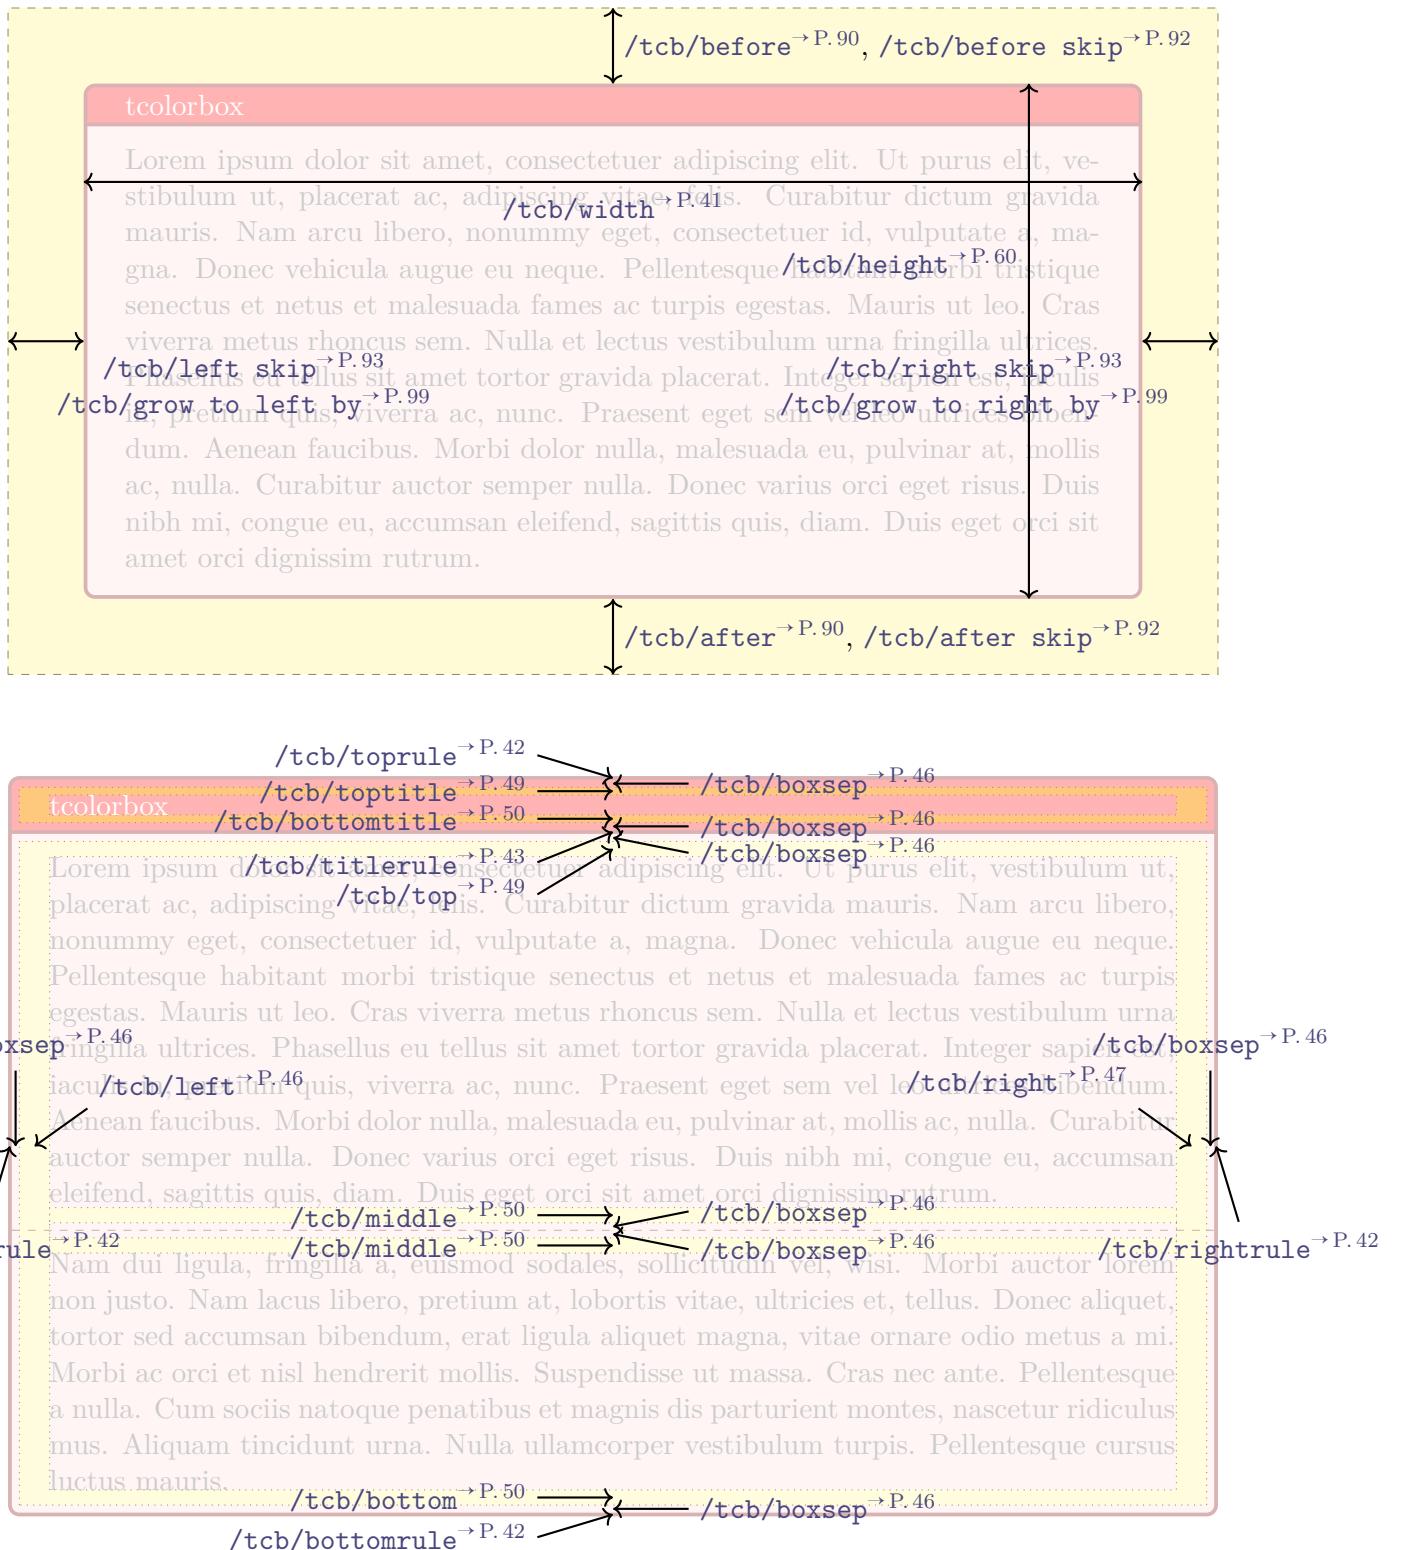

### 3 Macros for Box Creation

#### 3.1 Using `tcolorbox` and `\tcbbox`

```
\begin{tcolorbox}[\langle options\rangle]
  <environment content>
\end{tcolorbox}
```

This is the main environment to create an accentuated colored text box with rounded corners and, optionally, two parts. The appearance of this box is controlled by numerous options. In the most simple case the source code

```
\begin{tcolorbox}
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

creates the following compiled text box:

This is a **tcolorbox**.

The text content of the box can be divided in an upper and a lower part by the command `\tcblower`. Visually, both parts are separated by a line. For example:

```
\begin{tcolorbox}
  This is another \textbf{tcolorbox}.
  \tcblower
  Here, you see the lower part of the box.
\end{tcolorbox}
```

This code gives the following box:

This is another **tcolorbox**.

Here, you see the lower part of the box.

The `\langle options\rangle` control the appearance and several functions of the boxes, see 4 on page 24 for the complete list. A quick example is given here:

```
\begin{tcolorbox}[colback=red!5!white,colframe=red!75!black,title=My nice heading]
  This is another \textbf{tcolorbox}.
  \tcblower
  Here, you see the lower part of the box.
\end{tcolorbox}
```

My nice heading

This is another **tcolorbox**.

Here, you see the lower part of the box.

`\tcblower`

Used inside `tcolorbox` to separate the upper box part from the optional lower box part. The upper and the lower part are treated as separate functional units. If you only want to draw a line, see `\tcbline`<sup>→ P. 238</sup>.

### \tcbset{\langle options \rangle}

Sets options for every following `tcolorbox`<sup>P. 12</sup> inside the current TeX group. By default, this does not apply to nested boxes, see 4.16 on page 106.

For example, the colors of the boxes may be defined for the whole document by this:

```
\tcbset{colback=red!5!white,colframe=red!75!black}
```

### \tcbsetforeverylayer{\langle options \rangle}

Sets options for every following `tcolorbox`<sup>P. 12</sup> inside the current TeX group. In contrast to `\tcbset`, this does also apply to nested boxes, see 4.16 on page 106. Technically, the `\langle options \rangle` are appended to the default values for every `tcolorbox` which are applied by `/tcb/reset`<sup>P. 123</sup>.

You should not use this macro, if you are not completely sure that you want to have the `\langle options \rangle` also for boxes in boxes (in boxes in boxes ...).

```
\tcbset{colback=green!10!white}
\tcbsetforeverylayer{colframe=red!75!black}

\begin{tcolorbox}[title=All options for this box]
This is a tcolorbox.\par\medskip
\begin{tcolorbox}[title=Nested box]
Note that this nested box has a red frame but no green background.
\end{tcolorbox}
\end{tcolorbox}
\bigskip

\begin{tcolorbox}[reset]
Options given with |\tcbsetforeverylayer| survive a |reset|.
\end{tcolorbox}
```

All options for this box

This is a tcolorbox.

Nested box

Note that this nested box has a red frame but no green background.

Options given with `\tcbsetforeverylayer` survive a `reset`.

## \tcbbox[*options*]{*box content*}


Creates a colored box which is fitted to the width of the given *box content*. In principle, most *options* for a `tcolorbox`<sup>P.12</sup> can be used for `\tcbbox` with some restrictions. A `\tcbbox` cannot have a lower part and cannot be broken.

```
\tcbset{colframe=blue!50!black,colback=white,colupper=red!50!black,
        fonttitle=\bfseries,nobeforeafter,center title}

Text \tcbbox[tcbbox raise base]{Hello World}\hfill
%
\tcbbox[left=0mm,right=0mm,top=0mm,bottom=0mm,boxsep=0mm,
        toptitle=0.5mm,bottomtitle=0.5mm,title=My table]{%
    \arrayrulecolor{blue!50!black}\renewcommand{\arraystretch}{1.2}%
    \begin{tabular}{r|c|l}
    One & Two & Three \\ \hline
    Men & Mice & Lions \\ \hline
    Upper & Middle & Lower
    \end{tabular}\hfill
%
\tcbbox[colback=blue!85!black,
        left=0mm,right=0mm,top=0mm,bottom=0mm,boxsep=1mm,arc=0mm,boxrule=0.5pt,
        title=My picture]{%
    \includegraphics[width=5cm]{Basilica_5.png}}
```

Text Hello World

My table		
One	Two	Three
Men	Mice	Lions
Upper	Middle	Lower

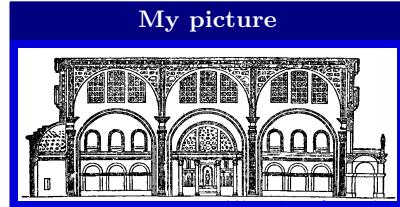

My picture

```
\tcbset{colframe=blue!50!black,colback=white,colupper=red!50!black,
        fonttitle=\bfseries,center title}

% Fixed width box
\begin{tcolorbox}Hello\\World!\end{tcolorbox}

% Fitted width box (like hbox or makebox)
\tcbbox{Hello\\World!}

% Fitted width box (using a TikZ node)
\tcbbox[tikznode]{Hello\\World!}
```

Hello  
World!

HelloWorld!

Hello  
World!

### \tcbxverb[*options*]{*verbatim box content*}

Creates a colored box based on  $\text{\tcbx}^{\rightarrow P.14}$  which is fitted to the width of the given *verbatim box content*. The underlying  $\text{\tcbx}^{\rightarrow P.14}$  is styled with  $/tcb/\text{verbatim}^{\rightarrow P.112}$  plus the given *options*. The difference to  $\text{\tcbx}^{\rightarrow P.14}$  is that the *verbatim box content* is interpreted *verbatim*. Therefore,  $\text{\tcbxverb}$  acts similar to  $\text{\verb}$ .

```
\tcbxverb{\LaTeX}, \tcbxverb[colback=blue!10!white,colupper=blue]{\LaTeX},  
\tcbxverb[blank,fuzzy halo]{\LaTeX}, \tcbxverb[beamer]{\LaTeX},  
\tcbxverb[enhanced,skin=enhancedmiddle jigsaw,colframe=red]{\LaTeX}.
```

\LaTeX, \LaTeX, \LaTeX, \LaTeX, | \LaTeX |.

## 3.2 Producing `tcolorbox` Environments and Commands

`\newtcolorbox[<init options>]{<name>} [<number>] [<default>]{<options>}`

Creates a new environment `<name>` based on `tcolorbox`<sup>P. 12</sup>. Basically, `\newtcolorbox` operates like `\newenvironment`. This means, the new environment `<name>` optionally takes `<number>` arguments, where `<default>` is the default value for the optional first argument. The `<options>` are given to the underlying `tcolorbox`. Note that `/tcb/savedelimiter`<sup>P. 33</sup> is set to the given `<name>` automatically. The `<init options>` allow setting up automatic numbering, see Section 5 from page 128.

```
\newtcolorbox{mybox}{colback=red!5!white,
colframe=red!75!black}

\begin{mybox}
This is my own box.
\end{mybox}
```

This is my own box.

```
\newtcolorbox{mybox}[1]{colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
title={#1}}

\begin{mybox}{Hello there}
This is my own box with a mandatory title.
\end{mybox}
```

Hello there

This is my own box with a mandatory title.

```
\newtcolorbox{mybox}[2][]{colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
colbacktitle=red!85!black,enhanced,
attach boxed title to top center={yshift=-2mm},
title={#2},#1}

\begin{mybox}[colback=yellow]{Hello there}
This is my own box with a mandatory title
and options.
\end{mybox}
```

Hello there

This is my own box with a mandatory title and options.

*Definition in the preamble:*

```
\newtcolorbox[auto counter,number within=section]{pabox}[2][]{%
colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
title=Examp.\thetcbcounter: #2,#1}
```

```
\begin{pabox}[colback=yellow]{Hello there}
This is my own box with a mandatory
numbered title and options.
\end{pabox}
```

**Examp. 3.1: Hello there**

This is my own box with a mandatory numbered title and options.

`\renewtcolorbox[<init options>]{<name>} [<number>] [<default>]{<options>}`

Operates like `\newtcolorbox`, but based on `\renewenvironment` instead of `\newenvironment`. An existing environment is redefined.

## \NewTColorBox[*init options*]{*name*}{*specification*}{*options*}

Creates a new environment *name* based on `tcolorbox`<sup>P.12</sup>.

Basically, `\NewTColorBox` operates like `\NewDocumentEnvironment`. This means, the new environment *name* is constructed with the given L<sup>A</sup>T<sub>E</sub>X3 argument *specification* following [25]. An error is issued if an environment with *name* has already been defined. The *options* are given to the underlying `tcolorbox`<sup>P.12</sup>.

Note that `/tcb/savedelimiter`<sup>P.33</sup> is set to the given *name* automatically.

The *init options* allow setting up automatic numbering, see Section 5 from page 128.

```
% counter from previous example
\NewTColorBox[use counter from=pabox]{mybox}{ O{red} m d"" !O{} }
  {enhanced,colframe=#1!75!black,colback=#1!5!white,
   fonttitle=\bfseries,title={\thetcbcounter~#2},
   IfValueT={#3}{watermark text={#3},#4}

\begin{mybox}{My title}
This is a tcolorbox.
\end{mybox}

\begin{mybox}[blue]{My title}
This is a tcolorbox.
\end{mybox}

\begin{mybox}[green]{My title}"My Watermark"
This is a tcolorbox.
\end{mybox}

\begin{mybox}[yellow]{My title}[colbacktitle=yellow!50!white,coltitle=black]
This is a tcolorbox.
\end{mybox}

\begin{mybox}[purple]{My title}"All together"[coltitle=yellow]
This is a tcolorbox.
\end{mybox}
```

### 3.2 My title

This is a tcolorbox.

### 3.3 My title

This is a tcolorbox.

### 3.4 My title

This is a tcolorbox.

My Watermark

### 3.5 My title

This is a tcolorbox.

### 3.6 My title

This is a tcolorbox.

All together

**\RenewTColorBox** [*init options*] {*name*} {*specification*} {*options*}

Operates like  $\text{\NewTColorBox}^{\rightarrow \text{P. 17}}$ , but based on `\RenewDocumentEnvironment` instead of `\NewDocumentEnvironment`. An existing environment is redefined.

**\ProvideTColorBox** [*init options*] {*name*} {*specification*} {*options*}

Operates like  $\text{\NewTColorBox}^{\rightarrow \text{P. 17}}$ , but based on `\ProvideDocumentEnvironment` instead of `\NewDocumentEnvironment`. The environment *name* is only created if it is not already defined.

**\DeclareTColorBox** [*init options*] {*name*} {*specification*} {*options*}

Operates like  $\text{\NewTColorBox}^{\rightarrow \text{P. 17}}$ , but based on `\DeclareDocumentEnvironment` instead of `\NewDocumentEnvironment`. The new environment is always created, irrespective of an already existing environment with the same name.

### \NewTotalTColorBox[*init options*]{\langle name\rangle}{\langle specification\rangle}{\langle options\rangle}{\langle content\rangle}

Creates a new command  $\langle name \rangle$  based on  $\text{tcolorbox}^{\rightarrow P. 12}$ . In contrast to  $\text{\NewTColorBox}^{\rightarrow P. 17}$ , also the  $\langle content \rangle$  of the  $\text{tcolorbox}$  is specified.

Basically,  $\text{\NewTotalTColorBox}$  operates like  $\text{\NewDocumentCommand}$ . This means, the new command  $\langle name \rangle$  is constructed with the given L<sup>A</sup>T<sub>E</sub>X3 argument  $\langle specification \rangle$  following [25]. An error is issued if  $\langle name \rangle$  has already been defined. The  $\langle options \rangle$  are given to the underlying  $\text{tcolorbox}^{\rightarrow P. 12}$  which is filled with the specified  $\langle content \rangle$ .

Note that  $/tcb/savedelimiter^{\rightarrow P. 33}$  is set to the given  $\langle name \rangle$  automatically. Also note that  $/tcb/saveto^{\rightarrow P. 29}$ ,  $/tcb/savelowerto^{\rightarrow P. 31}$ , and  $/tcb/redirectlowerto^{\rightarrow P. 31}$  cannot be used with  $\text{\NewTotalTColorBox}$  and friends.

The  $\langle init options \rangle$  allow setting up automatic numbering, see Section 5 from page 128.

```
\NewTotalTColorBox{\diabox}{ 0{} v m }
{ bicolor,nobeforeafter,equal height group=diabox,width=5.7cm,
  fonttitle=\bfseries\ttfamily,adjusted title={#2},center title,
  colframe=blue!20!black,leftupper=0mm,rightupper=0mm,colback=black!75!white,#1}
{ \tikz\path[fill zoom image={#2}] (0,0) rectangle (\linewidth,4cm);%
  \tcblower#3}

\diabox{blueshade.png}{Created with |GIMP|.\\\url{http://www.gimp.org}}
\diabox{goldshade.png}{Created with |GIMP|.\\\url{http://www.gimp.org}}
```



### \RenewTotalTColorBox[*init options*]{\langle name\rangle}{\langle specification\rangle}{\langle options\rangle}{\langle content\rangle}

Operates like  $\text{\NewTotalTColorBox}$ , but based on  $\text{\RenewDocumentCommand}$  instead of  $\text{\NewDocumentCommand}$ . An existing command is redefined.

### \ProvideTotalTColorBox[*init options*]{\langle name\rangle}{\langle specification\rangle}{\langle options\rangle}{\langle content\rangle}

Operates like  $\text{\NewTotalTColorBox}$ , but based on  $\text{\ProvideDocumentCommand}$  instead of  $\text{\NewDocumentCommand}$ . The command  $\langle name \rangle$  is only created if it is not already defined.

### \DeclareTotalTColorBox[*init options*]{\langle name\rangle}{\langle specification\rangle}{\langle options\rangle}{\langle content\rangle}

Operates like  $\text{\NewTotalTColorBox}$ , but based on  $\text{\DeclareDocumentCommand}$  instead of  $\text{\NewDocumentCommand}$ . The new command is always created, irrespective of an already existing command with the same name.

### 3.3 Producing \tcbx Commands

```
\newtcbx[<init options>]{\<name>}{<number>} [<default>]{<options>}
```

Creates a new macro  $\backslash<name>$  based on  $\tcbx$ <sup>P.14</sup>. Basically,  $\newtcbx$  operates like  $\newcommand$ . The new macro  $\backslash<name>$  optionally takes  $<number>+1$  arguments (up to 10), where  $<default>$  is the default value for the optional first argument. Additional to the  $<number>$  arguments, there is an automatic last (mandatory) argument of  $\backslash<name>$  which takes the box content. The  $<options>$  are given to the underlying  $\tcbx$ . The  $<init options>$  allow setting up automatic numbering, see Section 5 from page 128.

```
\newtcbx{\mybox}{colback=red!5!white,  
colframe=red!75!black}  
  
\mybox{This is my own box.}
```

This is my own box.

```
\newtcbx{\mybox}[1]{colback=red!5!white,  
colframe=red!75!black,fonttitle=\bfseries,  
title={#1}}  
  
\mybox{Hello there}{This is my own box.}
```

Hello there

This is my own box.

```
\newtcbx{\mybox}[2][]{colback=red!5!white,  
colframe=red!75!black,fonttitle=\bfseries,  
title={#2},#1}  
  
\mybox[colback=yellow]{Hello there}%  
{This is my own box.}
```

Hello there

This is my own box.

*Definition in the preamble:*

```
% counter from previous example  
\newtcbx[use counter from=pbbox]{\pbbox}[2][]%  
colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,  
title=(\thetcbcounter) #2,#1}
```

```
\pbbox[colback=yellow]{Hello there}%  
{This is my own box.}
```

(3.7) Hello there

This is my own box.

```
\newtcbx{\mybox}[1][red]{on line,  
arc=0pt,outer arc=0pt,colback=#1!10!white,colframe=#1!50!black,  
boxsep=0pt,left=1pt,right=1pt,top=2pt,bottom=2pt,  
boxrule=0pt,bottomrule=1pt,toprule=1pt}  
\newtcbx{\xmybox}[1][red]{on line,  
arc=7pt,colback=#1!10!white,colframe=#1!50!black,  
before upper={\rule[-3pt]{0pt}{10pt}},boxrule=1pt,  
boxsep=0pt,left=6pt,right=6pt,top=2pt,bottom=2pt}
```

The  $\mybox[\text{green}]\{\text{quick}\}$  brown  $\mybox[\text{blue}]\{\text{fox}\}$   $\mybox[\text{blue}]\{\text{jumps}\}$  over the  
 $\mybox[\text{green}]\{\text{lazy}\}$   $\mybox[\text{dog}\}.\backslash\par$   
The  $\xmybox[\text{green}]\{\text{quick}\}$  brown  $\xmybox[\text{blue}]\{\text{fox}\}$   $\xmybox[\text{blue}]\{\text{jumps}\}$  over the  
 $\xmybox[\text{green}]\{\text{lazy}\}$   $\xmybox[\text{dog}\}.$

The quick brown fox jumps over the lazy dog.  
The quick brown fox jumps over the lazy dog.

```
\renewtcbox[init options]{\name}[\number] [default] {\options}
```

Operates like `\newtcbox`<sup>P.20</sup>, but based on `\renewcommand` instead of `\newcommand`. An existing macro is redefined.

```
\NewTCBox[init options]{\name}{{specification}}{\options}
```

Creates a new command `\name` based on `\tcbx`<sup>P.14</sup>. Basically, `\NewTCBox` operates like `\NewDocumentCommand`. This means, the new command `\name` is constructed with the given L<sup>A</sup>T<sub>E</sub>X3 argument `specification` following [25]. Additional to the argument `specification`, there is an automatic last (mandatory) argument of `\name` which takes the box content. Therefore, `\name` may have up to 10 arguments in sum. An error is issued if `\name` has already been defined. The `options` are given to the underlying `\tcbx`<sup>P.14</sup>.

Note that `/tcb/savedelimiter`<sup>P.33</sup> is set to the given `name` automatically.

The `init options` allow setting up automatic numbering, see Section 5 from page 128.

```
% counter from previous example
\NewTCBox[use counter from=pabox]{\mybox}{ s m s }
{ nobeforeafter,colback=red!5!white,colframe=red!75!black,
  title={#2 (Box \thetcbcounter)},fonttitle=\bfseries,
  IfBooleanT={#1}{enhanced,drop shadow},
  IfBooleanT={#3}{colbacktitle=red!50!white} }

\mybox{Bird}{This is my first box.}
  \hfill
\mybox*{Tree}{This is my second box.}
  \par\bigskip
\mybox{Bike}*{This is my third box.}
  \hfill
\mybox*{City}*{This is my fourth box.}
```

Bird (Box 3.8)

This is my first box.

Tree (Box 3.9)

This is my second box.

Bike (Box 3.10)

This is my third box.

City (Box 3.11)

This is my fourth box.

```
\RenewTCBox[init options]{\name}{{specification}}{\options}
```

Operates like `\NewTCBox`, but based on `\RenewDocumentCommand` instead of `\NewDocumentCommand`. An existing command is redefined.

```
\ProvideTCBox[init options]{\name}{{specification}}{\options}
```

Operates like `\NewTCBox`, but based on `\ProvideDocumentCommand` instead of `\NewDocumentCommand`. The command `\name` is only created if it is not already defined.

```
\DeclareTCBox[init options]{\name}{{specification}}{\options}
```

Operates like `\NewTCBox`, but based on `\DeclareDocumentCommand` instead of `\NewDocumentCommand`. The new command is always created, irrespective of an already existing command with the same name.

### \NewTotalTCBox[*init options*] {*\name*} {*specification*} {*options*} {*content*}

Creates a new command *\name* based on  $\text{\tcbbox}^{\rightarrow \text{P. 14}}$ . In contrast to  $\text{\NewTCBox}^{\rightarrow \text{P. 21}}$ , also the *content* of the *tcbbox* is specified.

Basically, *\NewTotalTCBox* operates like *\NewDocumentCommand*. This means, the new command *\name* is constructed with the given L<sup>A</sup>T<sub>E</sub>X3 argument *specification* following [25]. An error is issued if *\name* has already been defined. The *options* are given to the underlying  $\text{\tcbbox}^{\rightarrow \text{P. 14}}$  which is filled with the specified *content*.

Note that */tcb/savedelimiter* $^{\rightarrow \text{P. 33}}$  is set to the given *name* automatically.

The *init options* allow setting up automatic numbering, see Section 5 from page 128.

```
\NewTotalTCBox{\myverb}{ 0{red} v !O{} }
{ fontupper=\ttfamily,nobeforeafter,tcbbox raise base,arc=0pt,outer arc=0pt,
  top=0pt,bottom=0pt,left=0mm,right=0mm,
  lefrule=0pt,rightrule=0pt,toprule=0.3mm,bottomrule=0.3mm,boxsep=0.5mm,
  colback=#1!10!white,colframe=#1!50!black,#3}{#2}
```

To set a word *\textbf{bold}* in *\myverb{\LaTeX}*, use *\myverb[green]{\textbf{bold}}*. Alternatively, write *\myverb[yellow]{\bfseries bold}*.  
In *\myverb[blue]{\LaTeX}[enhanced,fuzzy halo]*, other font settings are done in the same way, e.g. *\myverb{\textit}*, *\myverb{\itshape}* or *\myverb[brown]{\texttt}*, *\myverb[brown]{\ttfamily}*.

To set a word **bold** in *\LaTeX*, use *\textbf{bold}*. Alternatively, write *\bfseries bold*. In *\LaTeX*, other font settings are done in the same way, e.g. *\textit*, *\itshape* or *\texttt*, *\ttfamily*.

The next example uses *\lstinline* from the *listings* $^{\rightarrow \text{CTAN}}$  package to typeset the verbatim content.

```
% \usepackage{listings} or \tcbuselibrary{listings}
\NewTotalTCBox{\commandbox}{ s v }
{verbatim,colupper=white,colback=black!75!white,colframe=black}
{\IfBooleanT{#1}{\textcolor{red}{\ttfamily\bfseries > }}}%
\lstinline[language=command.com,keywordstyle=\color{blue!35!white}\bfseries]^#2^}

\commandbox*{cd "My Documents"} changes to directory \commandbox{My Documents}.

\commandbox*{dir /A} lists the directory content.

\commandbox*{copy example.txt d:\target} copies \commandbox{example.txt} to \commandbox{d:\target}.
```

> *cd "My Documents"* changes to directory *My Documents*.

> *dir /A* lists the directory content.

> *copy example.txt d:\target* copies *example.txt* to *d:\target*.

\RenewTotalTCBox[*init options*]{\langle name\rangle}{\langle specification\rangle}{\langle options\rangle}{\langle content\rangle}

Operates like \NewTotalTCBox<sup>→ P. 22</sup>, but based on \RenewDocumentCommand instead of \NewDocumentCommand. An existing command is redefined.

\ProvideTotalTCBox[*init options*]{\langle name\rangle}{\langle specification\rangle}{\langle options\rangle}{\langle content\rangle}

Operates like \NewTotalTCBox<sup>→ P. 22</sup>, but based on \ProvideDocumentCommand instead of \NewDocumentCommand. The command \langle name\rangle is only created if it is not already defined.

\DeclareTotalTCBox[*init options*]{\langle name\rangle}{\langle specification\rangle}{\langle options\rangle}{\langle content\rangle}

Operates like \NewTotalTCBox<sup>→ P. 22</sup>, but based on \NewDocumentCommand instead of \DeclareDocumentCommand. The new command is always created, irrespective of an already existing command with the same name.

### 3.4 Redefining other Environments (Wrapping with tcolorbox)

N 2014-10-20

\tcolorboxenvironment{\langle name\rangle}{\langle options\rangle}

An existing environment \langle name\rangle is redefined to be boxed inside a tcolorbox with the given \langle options\rangle.

```
% tcbuselibrary{skins}
\newenvironment{myitemize}{%
  \begin{itemize}}{\end{itemize}}
\begin{tcolorbox}[width=10cm]
\tcolorboxenvironment{myitemize}{blanker,
  before skip=6pt,after skip=6pt,
  borderline west={3mm}{0pt}{red}}
\end{tcolorbox}

Some text.
\begin{myitemize}
\item Alpha
\item Beta
\item Gamma
\end{myitemize}
More text.
```

Some text.  
• Alpha  
• Beta  
• Gamma  
More text.

See further examples in 18.4 on page 405.

## 4 Option Keys


For the `<options>` in `tcolorbox`<sup>→ P. 12</sup> respectively `\tcbset`<sup>→ P. 13</sup> the following pgf keys can be applied<sup>2</sup>. The key tree path `/tcb/` is not to be used inside these macros. It is easy to add your own style keys using the syntax for pgf keys, see [19, 23] or the examples starting from page 366.

### 4.1 Title

`/tcb/title=<text>` (no default, initially empty)

Creates a heading line with `<text>` as content.

```
\begin{tcolorbox}[title=My heading line]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```



`/tcb/notitle` (no value, initially set)

Removes the title line if set before.

`/tcb/adjusted title=<text>` (style, no default, initially unset)

Creates a heading line with `<text>` as content. The minimal height of this line is adjusted to fit the text given by `/tcb/adjust text`. This option makes sense for single line headings if boxes are set side by side with equal height. Note that it is very easy to trick this adjustment.

```
\tcbset{colback=White,arc=0mm,width=(\linewidth-4pt)/4,
equal height group=AT,before=,after=\hfill,fonttitle=\bfseries}

The following titles are not adjusted:\\
\foreach \n in {xxx,ggg,AAA,\\"Agypten}
{\begin{tcolorbox}[title=\n,colframe=red!75!black]
Some content.\end{tcolorbox}}
Now, we try again with adjusted titles:\\
\foreach \n in {xxx,ggg,AAA,\\"Agypten}
{\begin{tcolorbox}[adjusted title=\n,colframe=blue!75!black]
Some content.\end{tcolorbox}}
```

The following titles are not adjusted:

xxx	ggg	AAA	\Agypten
Some content.	Some content.	Some content.	Some content.

Now, we try again with adjusted titles:

xxx	ggg	AAA	\Agypten
Some content.	Some content.	Some content.	Some content.

`/tcb/adjust text=<text>` (no default, initially Äpgjy)

This sets the reference text for `/tcb/adjusted title`. If your texts never exceed “Äpgjy” in depth and height you don’t need to care about this option.

<sup>2</sup>Strictly speaking, they are pgfkeys keys. The pgfkeys package is auto-loaded by pgf and is documented in [23, Part VII].

N 2014-11-24

/tcb/squeezed title=<text>

(style, no default, initially unset)

Creates a single heading line with <text> as content. If the <text> is longer than the available space, the text is squeezed to fit into the available space.

```
% \tcbuselibrary{raster}
\begin{tcbitemize}[raster columns=3,raster equal height,
  colframe=red!75!black,colback=red!5!white,fonttitle=\bfseries]
\tcbitem[squeezed title={Short title}]
  First box
\tcbitem[squeezed title={This is a very very long title}]
  Second box
\tcbitem[squeezed title={This title is clearly to long for this application}]
  Third box
\end{tcbitemize}
```

Short title	This is a very very long title	This title is clearly to long for this application
First box	Second box	Third box

N 2014-11-24

/tcb/squeezed title\*=<text>

(style, no default, initially unset)

This is a combination of /tcb/adjusted title<sup>→ P. 24</sup> and /tcb/squeezed title.

```
% \tcbuselibrary{raster}
\begin{tcbitemize}[raster columns=3,raster equal height,
  colframe=red!75!black,colback=red!5!white,fonttitle=\bfseries]
\tcbitem[squeezed title*={Short title}]
  First box
\tcbitem[squeezed title*={This is a very very long title}]
  Second box
\tcbitem[squeezed title*={This title is clearly to long for this application}]
  Third box
\end{tcbitemize}
```

Short title	This is a very very long title	This title is clearly to long for this application
First box	Second box	Third box

N 2019-03-01

/tcb/titlebox=<mode>

(no default, initially visible)

Controls the treatment of the title part of the box. Feasible values for <mode> are:

- **visible**: usual type setting of the title box,
- **invisible**: empty space instead of the title contents.

```
\begin{tcolorbox}[title=My invisible title,
  titlebox=invisible]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```


This is a tcolorbox.

### /tcb/detach title

(no value)

Detaches the title from its normal position. The text of the title is stored into `\tcbtittletext` and the formatted title is available by `\tcbttitle`. The main application is to move the title from its usual place to another one.

```
\newtcolorbox{mybox}[2][]{colbacktitle=red!10!white,  
colback=blue!10!white,coltitle=red!70!black,  
title={#2},fonttitle=\bfseries,#1}  
  
\begin{mybox}{My title}  
This is a \textbf{tcolorbox}.  
\end{mybox}  
\begin{mybox}[detach title,before upper={\tcbtittletext\quad}]{My title}  
This is a \textbf{tcolorbox}.  
\end{mybox}  
\begin{mybox}[detach title,after upper={\par\hfill\tcbttitle}]{My title}  
This is a \textbf{tcolorbox}.  
\end{mybox}
```

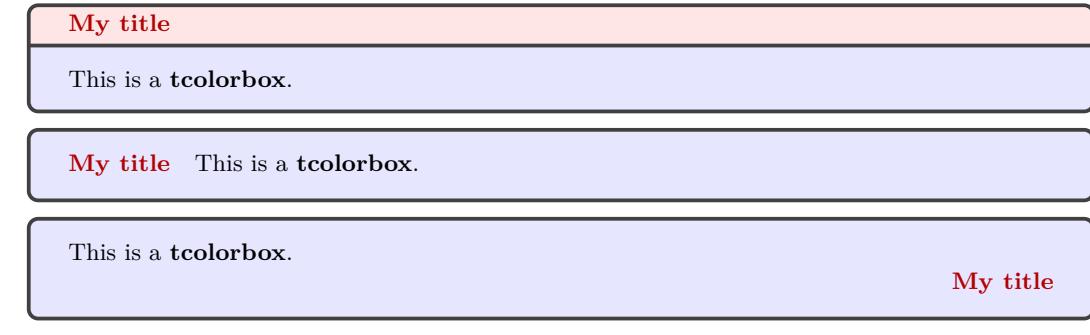

### /tcb/attach title

(no value)

Attaches the title to its normal position. This option is used to reverse `/tcb/detach title`.


**U** 2015-07-08

### /tcb/attach title to upper=<text>

(style, default empty, initially unset)

Attaches the title to the begin of the upper part of the box content. The optional `<text>` is set between the formatted title and the box content.

```
\newtcolorbox{mybox}[2][]{colbacktitle=red!10!white,  
colback=blue!10!white,coltitle=red!70!black,  
title={#2},fonttitle=\bfseries,#1}  
  
\begin{mybox}[attach title to upper={\ ---\ }]{My title}  
This is a \textbf{tcolorbox}.  
\end{mybox}  
\begin{mybox}[attach title to upper,after title={:\ }]{My title}  
This is a \textbf{tcolorbox}.  
\end{mybox}
```

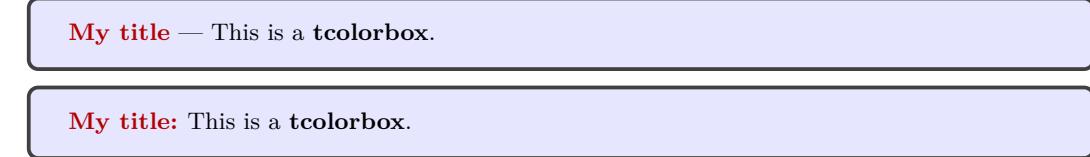

More title options are documented in 4.11 on page 71 and 10.2 on page 180.

## 4.2 Subtitle

Inside the box content, one or more subtitles can be added. In general, a subtitle is a further `tcolorbox`<sup>→ P. 12</sup> which inherits some color and geometry options from the enclosing box. It may be customized just like any other `tcolorbox`<sup>→ P. 12</sup>.

N 2014-10-10

`\tcbsubtitle[<options>]{<text>}`

Used inside a `tcolorbox`<sup>→ P. 12</sup> to add a subtitle box with the given `<text>`. This is an independent `tcolorbox`<sup>→ P. 12</sup> which is formatted by several inherited properties of the enclosing box, by further settings from `/tcb.subtitle style`, and by the given `<options>`.

```
\begin{tcolorbox}[title=My title,
  colback=red!5!white,
  colframe=red!75!black,
  fonttitle=\bfseries]
This is a \textbf{tcolorbox}.
\tcbsubtitle[before skip=\baselineskip]%
{My subtitle}
Further text.
\end{tcolorbox}
```

```
My title
This is a tcolorbox.
My subtitle
Further text.
```

```
\begin{tcolorbox}[title=My title,
  colback=red!5!white,
  colframe=red!75!black,
  colbacktitle=yellow!50!red,
  coltitle=red!25!black,
  fonttitle=\bfseries]
This is a \textbf{tcolorbox}.
\tcbsubtitle[before skip=\baselineskip]%
{My subtitle}
Further text.
\end{tcolorbox}
```

```
My title
This is a tcolorbox.
My subtitle
Further text.
```

N 2014-10-10

`/tcb.subtitle style=<options>`

(no default, initially empty)

Adds `tcolorbox <options>` to the settings for `\tcbsubtitle`.

```
\begin{tcolorbox}[title=My title,
  colback=red!5!white,
  colframe=red!75!black,
  colbacktitle=yellow!50!red,
  coltitle=red!25!black,
  fonttitle=\bfseries,
  subtitle style={boxrule=0.4pt,
    colback=yellow!50!red!25!white,
    colupper=red!75!gray} ]
This is a \textbf{tcolorbox}.
\tcbsubtitle{My subtitle}
Further text.
\tcbsubtitle{Second subtitle}
Further text.
\end{tcolorbox}
```

```
My title
This is a tcolorbox.
My subtitle
Further text.
Second subtitle
Further text.
```

### 4.3 Upper Part

The text content of a `tcolorbox`<sup>P. 12</sup> may be parted into a mandatory *upper part* and an optional *lower part*. These parts are separated by `\tcblower`<sup>P. 12</sup>. If there is no `\tcblower`<sup>P. 12</sup> present, there is no *lower part* and the *upper part* forms the complete text content.

N 2015-01-06

`/tcb/upperbox=<mode>` (no default, initially `visible`)

Controls the treatment of the upper part of the box. If there is no lower part, this is the complete text content. Feasible values for `<mode>` are:

- `visible`: usual type setting of the upper part,
- `invisible`: empty space instead of the upper part contents.

```
\begin{tcolorbox}[upperbox=invisible,colback=white]
This is a \textbf{tcolorbox} (but invisible).
\end{tcolorbox}
```

```
\begin{tcolorbox}[upperbox=invisible,colback=white]
This is a \textbf{tcolorbox} (but invisible).
\tcblower
This is the lower part.
\end{tcolorbox}
```



This is the lower part.

N 2015-01-06

`/tcb/visible` (style, no value)

Shortcut for setting `/tcb/upperbox`, `/tcb/lowerbox`<sup>P. 30</sup>, and `/tcb/titlebox`<sup>P. 25</sup> to be `visible`.

N 2015-01-06

U 2019-03-01

`/tcb/invisible` (style, no value)

Shortcut for setting `/tcb/upperbox`, `/tcb/lowerbox`<sup>P. 30</sup>, and `/tcb/titlebox`<sup>P. 25</sup> to be `invisible`.

```
\begin{tcolorbox}[invisibility]
This is a \textbf{tcolorbox} (but invisible).
\end{tcolorbox}
```



**/tcb/saveto=⟨file name⟩**

(no default, initially empty)

Saves the content of the box into a file for an optional later usage. This is the counterpart of **/tcb/savelower to<sup>→ P.31</sup>**, but it saves not only the upper part but the whole content. If a lower part is present, it is also saved including **\tcblower<sup>→ P.12</sup>**. An empty ⟨file name⟩ deactivates **/tcb/saveto**.

! This option cannot be combined with **/tcb/savelower to<sup>→ P.31</sup>** or **/tcb/redirectlower to<sup>→ P.31</sup>**.

```
\begin{tcolorbox}[invisible,saveto=\jobname_mysave1.tex,colback=white]
This is a \textbf{tcolorbox} which seems to be empty.
The content is saved for later usage.
\end{tcolorbox}
```

```
Now, we load the saved text:\\
\input{\jobname_mysave1.tex}
```

Now, we load the saved text:

This is a **tcolorbox** which seems to be empty. The content is saved for later usage.

```
\begin{tcolorbox}[saveto=\jobname_mysave2.tex]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

Now, we load the saved text:

```
\begin{tcolorbox}[colframe=red,colback=red!10,
  coltitle=black,colbacktitle=red!20,sidebyside,
  title=Here we see the saved content including the lower part]
\input{\jobname_mysave2.tex}
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

Now, we load the saved text:

Here we see the saved content including the lower part

This is a **tcolorbox**.

This is the lower part.

## 4.4 Lower Part

/tcb/lowerbox=<mode>

(no default, initially **visible**)

Controls the treatment of the lower part of the box. Feasible values for <mode> are:

- **visible**: usual type setting of the lower part,
- **invisible**: empty space instead of the lower part contents,
- **ignored**: the lower part is not used (here).

The last two values are usually applied in connection with `savelowerto`.

! The lower part is always typeset into a box which is used or dropped accordingly. The only exception is applying /tcb/redirectlowerto<sup>→ P. 31</sup>.

```
\begin{tcolorbox}[lowerbox=invisible,colback=white]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part (but invisible).
\end{tcolorbox}

\begin{tcolorbox}[lowerbox=ignored,colback=white]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part (but ignored).
\end{tcolorbox}
```

This is a **tcolorbox**.

This is a **tcolorbox**.

U 2014-11-28

### /tcb/savelowersto=<file name>

(no default, initially empty)

Saves the content of the lower part into a file for an optional later usage. An empty <file name> deactivates /tcb/savelowersto.



This option cannot be combined with /tcb/saveto<sup>→ P. 29</sup>.

```
\begin{tcolorbox}[lowerbox=invisible,savelowersto=\jobname_bpsave.tex,colback=white]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part which may be quite complex:
\$displaystyle f(x)=\frac{1+x^2}{1-x^2}\$.
\end{tcolorbox}

Now, we load the saved text:\\
\input{\jobname_bpsave.tex}
```

This is a tcolorbox.

Now, we load the saved text:

This is the lower part which may be quite complex:  $f(x) = \frac{1+x^2}{1-x^2}$ .

N 2023-07-17

### /tcb/redirectlowersto=<file name>

(no default, initially empty)

This is a combination of /tcb/savelowersto and /tcb/lowerbox<sup>→ P. 30</sup>=ignored and additionally avoids typesetting the content of the lower part. This can be useful, if the lower part contains counters or similar. An empty <file name> deactivates the saving, but the /tcb/lowerbox<sup>→ P. 30</sup> setting will still be ignored.



This option cannot be combined with /tcb/saveto<sup>→ P. 29</sup>.

```
\setcounter{enumi}{1}
Test counter: \theenumi

\begin{tcolorbox}[redirectlowersto=\jobname_bpsave2.tex,colback=white]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.\stepcounter{enumi}
New value of test counter: \theenumi.
\end{tcolorbox}

Now, we load the saved text:\\
\input{\jobname_bpsave2.tex}
```

Test counter: 1

This is a tcolorbox.

Now, we load the saved text:

This is the lower part. New value of test counter: 2.

/tcb/lower separated=true|false

(default true, initially true)

If set to true, the lower part is visually separated from the upper part. It depends on the chosen skin how the visualization of the separation is done.

```
% \tcbuselibrary{skins,raster}
\begin{tcbraster}[colback=red!5!white,colframe=red!75!black,
    fonttitle=\bfseries,fontlower=\itshape]
%
\begin{tcolorbox}[title=Lower separated]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}
%
\begin{tcolorbox}[title=Lower not separated,lower separated=false]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}
%
\begin{tcolorbox}[sidebyside,title=Lower separated]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}
%
\begin{tcolorbox}[sidebyside,title=Lower not separated,lower separated=false]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}
%
\begin{tcolorbox}[beamer,title=Lower separated]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}
%
\begin{tcolorbox}[beamer,title=Lower not separated,lower separated=false]
This is the upper part.
\tcblower
This is the lower part.
\end{tcolorbox}
%
\end{tcbraster}
```

#### Lower separated

This is the upper part.

*This is the lower part.*

#### Lower not separated

This is the upper part.

*This is the lower part.*

#### Lower separated

This is the upper part.

*This is the lower part.*

#### Lower not separated

This is the upper part.

*This is the lower part.*

#### Lower separated

This is the upper part.

*This is the lower part.*

#### Lower not separated

This is the upper part.

*This is the lower part.*

`/tcb/savedelimiter=<name>` (no default, initially `tcolorbox`)

Used in connection with new environment definitions which extend `tcolorbox` and use or allow the option `/tcb/savelowerto→ P. 31` or `/tcb/redirectlowerto→ P. 31`. To catch the end of the new box environment `<name>` has to be the name of this environment. Additionally, the environment definition has to use `\tcolorbox` instead of `\begin{tcolorbox}` and `\endtcolorbox` instead of `\end{tcolorbox}`.

```
\newenvironment{mybox}[1]{%
  \tcolorbox[savedelimiter=mybox,
    savelowerto=\jobname_bpsave3.tex,lowerbox=ignored,
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    title={#1}}%
{\endtcolorbox}

\begin{mybox}{My Example}
Upper part.
\tcblower
Saved lower part!
\end{mybox}

Now, the saved part is used:
\begin{tcolorbox}[colback=green!5]
\input{\jobname_bpsave3.tex}
\end{tcolorbox}
```

### My Example

Upper part.

Now, the saved part is used:

Saved lower part!

The `savedelimiter` is used implicitly with `\newtcolorbox→ P. 16` which allows a more convenient usage:

```
\newtcolorbox{mybox}[1]{%
  savelowerto=\jobname_bpsave4.tex,lowerbox=ignored,
  colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
  title={#1}}%

\begin{mybox}{My Example}
Upper part.
\tcblower
Saved lower part!
\end{mybox}

Now, the saved part is used:
\begin{tcolorbox}[colback=green!5]
\input{\jobname_bpsave4.tex}
\end{tcolorbox}
```

### My Example

Upper part.

Now, the saved part is used:

Saved lower part!

## 4.5 Colors and Fonts

`/tcb/colframe=<color>` (no default, initially `black!75!white`)

Sets the frame `<color>` of the box.

```
\begin{tcolorbox}[colframe=red!50!white]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

`/tcb/colback=<color>` (no default, initially `black!5!white`)

Sets the background `<color>` of the box.

```
\begin{tcolorbox}[colback=red!50!white]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

Also see `/tcb/colbacklower`<sup>→ P. 249</sup> of the `LIB skins` library.

`/tcb/title filled=true|false` (default `true`, initially `false`)

Switches the drawing of the title background according to the given value. This option is set to `true` automatically by `/tcb/colbacktitle`, `/tcb/opacitybacktitle`<sup>→ P. 58</sup>, and `/tcb/title style`<sup>→ P. 175</sup>, and `/tcb/title code`<sup>→ P. 163</sup>.

```
\begin{tcolorbox}[title=My title,title filled]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[title=My title,
  title filled=false]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

My title

This is a **tcolorbox**.

`/tcb/colbacktitle=<color>` (no default, initially `black!50!white`)

Sets the background `<color>` of the title area of the box.

```
\begin{tcolorbox}[colbacktitle=red!50!white,
  title=My title,coltitle=black,
  fonttitle=\bfseries]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/colupper=<color>`

(no default, initially `black`)

Sets the text `<color>` of the upper part.

```
\begin{tcolorbox}[colupper=red!75!black]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

`/tcb/collower=<color>`

(no default, initially `black`)

Sets the text `<color>` of the lower part.

```
\begin{tcolorbox}[collower=red!75!black]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

`/tcb/coltext=<color>`

(style, no default, initially `black`)

Sets the text `<color>` of the box. This is an abbreviation for setting `colupper` and `collower` to the same value.

```
\begin{tcolorbox}[coltext=red!75!black]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

`/tcb/coltitle=<color>`

(no default, initially `white`)

Sets the title text `<color>` of the box.

```
\begin{tcolorbox}[coltitle=red!75!black,
  colbacktitle=black!10!white,title=Test]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

Test

This is a **tcolorbox**.

/tcb/fontupper=<text>

(no default, initially empty)

Sets <text> before the content of the upper part (e.g. font settings).

```
\begin{tcolorbox}[fontupper=Hello!~\sffamily]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

Hello! This is a **tcolorbox**.

/tcb/fontlower=<text>

(no default, initially empty)

Sets <text> before the content of the lower part (e.g. font settings).

```
\begin{tcolorbox}[fontlower=\sffamily\bfseries]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

**This is the lower part.**

/tcb/fonttitle=<text>

(no default, initially empty)

Sets <text> before the content of the title text (e.g. font settings).

```
\begin{tcolorbox}[fonttitle=\sffamily\bfseries\large,title=Hello]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

**Hello**

This is a **tcolorbox**.



More color options are provided by using skins documented in Section 10 from page 172.

## 4.6 Text Alignment

N 2015-05-07 `/tcb/halign=<alignment>`

(no default, initially `justify`)

N 2015-05-07 `/tcb/halign upper=<alignment>`

(no default, initially `justify`)

If there is no lower part, `halign` determines the horizontal `<alignment>` of the text content. Otherwise, `halign` determines the horizontal `<alignment>` of the upper part of the box only. The feasible values for `<alignment>` are more or less identical to the corresponding `/tikz/align` settings, even if the implementation differs.

- `justify`: usual left and right justified type setting.
- `left`: left border justification in analogy to plain TeX.
- `flush left`: left border justification with `\raggedright` of LATEX.
- `right`: right border justification in analogy to plain TeX.
- `flush right`: right border justification with `\raggedleft` of LATEX.
- `center`: centering in analogy to plain TeX.
- `flush center`: centering with `\centering` of LATEX.

The differences between the flush and non-flush version are explained in detail in the TikZ manual [23]. The short story is that the non-flush versions will often look more balanced but with more hyphenations. `/tcb/halign upper` is an alias for `/tcb/halign`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,size=small,
fonttitle=\bfseries,width=3.5cm,box align=top,
nobeforeafter}

\begin{tcolorbox}[adjusted title=flush center,halign=flush center]
This is a demonstration text for showing how line breaking works.
\end{tcolorbox}
\begin{tcolorbox}[adjusted title=flush left,halign=flush left]
This is a demonstration text for showing how line breaking works.
\end{tcolorbox}
\begin{tcolorbox}[adjusted title=flush right,halign=flush right]
This is a demonstration text for showing how line breaking works.
\end{tcolorbox}

\begin{tcolorbox}[adjusted title=center,halign=center]
This is a demonstration text for showing how line breaking works.
\end{tcolorbox}
\begin{tcolorbox}[adjusted title=left,halign=left]
This is a demonstration text for showing how line breaking works.
\end{tcolorbox}
\begin{tcolorbox}[adjusted title=right,halign upper=right]
This is a demonstration text for showing how line breaking works.
\end{tcolorbox}
```

flush center
This is a demonstration text for showing how line breaking works.

flush left
This is a demonstration text for showing how line breaking works.

flush right
This is a demonstration text for showing how line breaking works.

center
This is a demonstration text for showing how line breaking works.

left
This is a demonstration text for showing how line breaking works.

right
This is a demonstration text for showing how line breaking works.

N 2022-07-07

/tcb/halign code={⟨code⟩}

(no default)

N 2022-07-07

/tcb/halign upper code={⟨code⟩}

(no default)

If /tcb/halign<sup>→ P.37</sup> resp. /tcb/halign upper<sup>→ P.37</sup> is not flexible enough, /tcb/halign code resp. /tcb/halign upper code allows to set arbitrary ⟨code⟩ to configure the horizontal alignment of the text content, e.g. using alignments from specialized packages.


N 2015-05-07

/tcb/halign lower=⟨alignment⟩

(no default, initially justify)

halign lower determines the horizontal ⟨alignment⟩ of the lower part of the box. The feasible values for ⟨alignment⟩ are the same as for /tcb/halign<sup>→ P.37</sup>.

```
\begin{tcbraster}[raster columns=3,fonttitle=\bfseries,  
colback=red!5!white,colframe=red!75!black]  
  
\begin{tcolorbox}[adjusted title=flush center,halign lower=flush center]  
Upper part. \tcblower Lower part.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=flush left,halign lower=flush left]  
Upper part. \tcblower Lower part.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=flush right,halign lower=flush right]  
Upper part. \tcblower Lower part.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=center,halign lower=center]  
Upper part. \tcblower Lower part.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=left,halign lower=left]  
Upper part. \tcblower Lower part.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=right,halign lower=right]  
Upper part. \tcblower Lower part.  
\end{tcolorbox}  
  
\end{tcbraster}
```

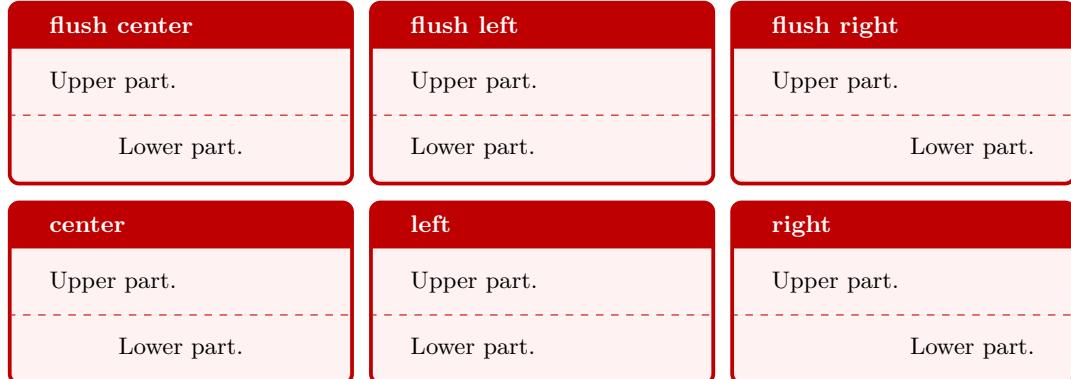

N 2022-07-07

/tcb/halign lower code={⟨code⟩}

(no default)

If /tcb/halign lower is not flexible enough, /tcb/halign lower code allows to set arbitrary ⟨code⟩ to configure the horizontal alignment of the lower part of the box.

N 2015-05-07

/tcb/halign title=<alignment>

(no default, initially **justify**)

halign title determines the horizontal <alignment> of the title of the box. The feasible values for <alignment> are the same as for /tcb/halign<sup>→ P.37</sup>.

```
\begin{tcbraster}[raster columns=3,fonttitle=\bfseries,  
colback=red!5!white,colframe=red!75!black]  
  
\begin{tcolorbox}[adjusted title=flush center,halign title=flush center]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=flush left,halign title=flush left]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=flush right,halign title=flush right]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=center,halign title=center]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=left,halign title=left]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
\begin{tcolorbox}[adjusted title=right,halign title=right]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
  
\end{tcbraster}
```

flush center

This is a tcolorbox.

flush left

This is a tcolorbox.

flush right

This is a tcolorbox.

center

This is a tcolorbox.

left

This is a tcolorbox.

right

This is a tcolorbox.

N 2022-07-07

/tcb/halign title code={<code>}

(no default)

If /tcb/halign title is not flexible enough, /tcb/halign title code allows to set arbitrary <code> to configure the horizontal alignment of the title of the box.

U 2015-05-07

/tcb/flushleft upper

(style, no value)

Shortcut for setting /tcb/halign<sup>→ P.37</sup> to **flush left**.

U 2015-05-07

/tcb/center upper

(style, no value)

Shortcut for setting /tcb/halign<sup>→ P.37</sup> to **flush center**.

U 2015-05-07

/tcb/flushright upper

(style, no value)

Shortcut for setting /tcb/halign<sup>→ P.37</sup> to **flush right**.

U 2015-05-07

/tcb/flushleft lower

(style, no value)

Shortcut for setting /tcb/halign lower<sup>→ P.38</sup> to **flush left**.

U 2015-05-07

/tcb/center lower

(style, no value)

Shortcut for setting /tcb/halign lower<sup>→ P.38</sup> to **flush center**.

U 2015-05-07

/tcb/flushright lower

(style, no value)

Shortcut for setting /tcb/halign lower<sup>→ P.38</sup> to **flush right**.

U 2015-05-07	<b>/tcb/flushleft title</b>	(style, no value)
	Shortcut for setting <code>/tcb/halign title</code> <sup>→ P. 39</sup> to <b>flush left</b> .	
U 2015-05-07	<b>/tcb/center title</b>	(style, no value)
	Shortcut for setting <code>/tcb/halign title</code> <sup>→ P. 39</sup> to <b>flush center</b> .	

U 2015-05-07	<b>/tcb/flushright title</b>	(style, no value)
	Shortcut for setting <code>/tcb/halign title</code> <sup>→ P. 39</sup> to <b>flush right</b> .	

! The vertical alignment settings are only relevant for boxes which are larger than their natural height, see Section 4.10 on page 60.

U 2015-07-16	<b>/tcb/valign=⟨alignment⟩</b>	(no default, initially <b>top</b> )
	If the height of a <b>tcolorbox</b> is not the natural height, <b>valign</b> determines the vertical ⟨alignment⟩ of the upper part. Feasible values are	

- **top**: Anchor text at top.
- **center**: Anchor text at center.
- **bottom**: Anchor text at bottom.
- **scale**: Scale text vertically to fit into the available space. This is brutal and may not look very good. Consider Section 22 on page 457 alternatively.
- **scale\***: Like **scale**, but scaling is bounded by `/tcb/valign scale limit`.

For a box with natural height, these settings are meaningless.

```
\tcbset{width=(\linewidth-2mm)/4,before=,after=\hfill,
colframe=blue!75!black,colback=white,height=2cm}

\foreach \myalign in {top,center,bottom,scale}
{\begin{tcolorbox}[valign=\myalign]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}}
```

This is a **tcolorbox**.

This is a **tcolorbox**.

This is a **tcolorbox**.

This is a **tcolorbox**.

N 2015-05-07	<b>/tcb/valign upper=⟨alignment⟩</b>	(no default, initially <b>top</b> )
	Alias for <code>/tcb/valign</code> .	

N 2015-07-16	<b>/tcb/valign lower=⟨alignment⟩</b>	(no default, initially <b>top</b> )
	This key has the same meaning for the lower part as <b>valign</b> for the upper part, i.e., it determines the vertical ⟨alignment⟩ of the lower part with feasible values <b>top</b> , <b>center</b> , <b>bottom</b> , <b>scale</b> , and <b>scale*</b> .	

N 2015-07-16	<b>/tcb/valign scale limit=⟨real number⟩</b>	(no default, initially <b>1.1</b> )
	Sets an upper scale limit for the <b>scale*</b> setting in <code>/tcb/valign</code> and <code>/tcb/valign lower</code> . Note that this value is not reset by <code>/tcb/reset</code> <sup>→ P. 123</sup> . So, changes also apply to embedded boxes.	

Also see `/tcb/sidebyside align`<sup>→ P. 139</sup> for alignment settings when upper part and lower part are set side-by-side.

## 4.7 Geometry

### 4.7.1 Width

/tcb/width=<length>

(no default, initially \linewidth)

Sets the total width of the colored box to <length>. See also /tcb/height<sup>→ P. 60</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=\linewidth/2]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a tcolorbox.

N 2014-10-31

/tcb/text width=<length>

(style, no default)

Sets the text width of the upper part to <length>. See also /tcb/text height<sup>→ P. 61</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[text width=4cm]
This is a \textbf{tcolorbox} where the text has a width of 4cm.
\end{tcolorbox}
```

This is a tcolorbox where  
the text has a width of 4cm.

N 2014-11-07

/tcb/add to width=<length>

(style, no default)

Adds <length> to the current total width of the colored box.

```
\tcbset{width=4cm,colback=red!5!white,
colframe=red!75!black}

\begin{tcolorbox}
This is a \textbf{tcolorbox}.
\end{tcolorbox}

\begin{tcolorbox}[add to width=1cm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a tcolorbox.

This is a tcolorbox.

See Section 4.10 on page 60 for setting fixed height values.

#### 4.7.2 Rules

**/tcb/toprule=⟨length⟩** (no default, initially 0.5mm)

Sets the line width of the top rule to ⟨length⟩.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[toprule=3mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/bottomrule=⟨length⟩** (no default, initially 0.5mm)

Sets the line width of the bottom rule to ⟨length⟩.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[bottomrule=3mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/leftrule=⟨length⟩** (no default, initially 0.5mm)

Sets the line width of the left rule to ⟨length⟩.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[leftrule=3mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

**/tcb/rightrule=⟨length⟩** (no default, initially 0.5mm)

Sets the line width of the right rule to ⟨length⟩.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[rightrule=3mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

`/tcb/titlerule=<length>`

(no default, initially 0.5mm)

Sets the line width of the rule below the title to `<length>`.

```
\tcbset{enhanced,colback=red!5!white,colframe=red!75!black,  
colbacktitle=red!90!black}
```

```
\begin{tcolorbox}[titlerule=3mm,title=This is the title]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is the title

This is a **tcolorbox**.

`/tcb/boxrule=<length>`

(style, no default, initially 0.5mm)

Sets all rules of the frame to `<length>`, i.e. `/tcb/toprule`<sup>P. 42</sup>, `/tcb/bottomrule`<sup>P. 42</sup>, `/tcb/leftrule`<sup>P. 42</sup>, `/tcb/rightrule`<sup>P. 42</sup>, and `/tcb/titlerule`.

```
\tcbset{colback=red!5!white,colframe=red!75!black}
```

```
\begin{tcolorbox}[boxrule=3mm]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.



More options for drawing a `/tcb/borderline`<sup>P. 203</sup> are provided by using skins documented in Section 10 from page 172.

#### 4.7.3 Arcs

`/tcb/arc=<length>`

(no default, initially 1mm)

Sets the inner radius of the four frame arcs to `<length>`.

```
\tcbset{colback=red!5!white,colframe=red!75!black}
```

```
\begin{tcolorbox}[arc=0mm]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
\begin{tcolorbox}[arc=3mm]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

This is a **tcolorbox**.

N 2015-05-05

### /tcb/circular arc


(style, no value)

Sets `/tcb/arc`<sup>→ P. 43</sup> to match the half of the inner width of the colored box. If width and height of the box are identical, this gives a circle.



If the height of the box is smaller than the width, the result will look quite ugly.

```
\begin{tcolorbox}[width=3cm,
  colback=red!5!white,
  colframe=red!75!black,
  halign=center, valign=center,
  square, circular arc]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```



N 2015-05-05

### /tcb/bean arc

(style, no value)

Sets `/tcb/arc`<sup>→ P. 43</sup> to match the smaller value of the half of the inner width and of the inner height of the colored box.




This only works for a fixed `/tcb/height`<sup>→ P. 60</sup>. Also, `/tcb/bean arc` must be used after width and height are set by option keys.

```
\tcbsset{size=fbox,boxrule=0.5mm,
  colback=red!5!white,
  colframe=red!75!black,
  halign=center, valign=center}

\begin{tcolorbox}[width=3cm,height=2cm,
  bean arc]
Box A
\end{tcolorbox}

\begin{tcolorbox}[width=2cm,height=3cm,
  bean arc]
Box B
\end{tcolorbox}
```

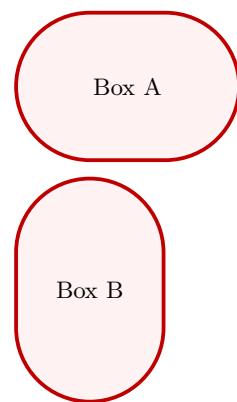

N 2015-05-05

### /tcb/octagon arc

(style, no value)

Sets `/tcb/arc`<sup>→ P. 43</sup> to match  $\frac{1}{2+\sqrt{2}}$  of the inner width of the colored box. If width and height of the box are identical, the interior is a regular octagon.

```
\begin{tcolorbox}[enhanced,
  size=minimal,auto outer arc,
  width=2.1cm,octogon arc,
  colback=red,colframe=white,colupper=white,
  fontupper=\fontsize{7mm}{7mm}\selectfont\bfseries\sffamily,
  halign=center,valign=center,
  square,arc is angular,
  borderline={0.2mm}{-1mm}{red} ]
STOP
\end{tcolorbox}
```



N 2015-05-05

### /tcb/arc is angular

(no value, initially unset)

Using this options applies a patch which straightens the corners arcs of the boxes. The little arcs are replaced by little straight lines.

! This patch is considered as an experimental feature. It changes some of the original TikZ code. This change may break with future updates of TikZ.

```
\tcbset{colback=red!5!white,colframe=red!75!black,  
arc=3mm}  
  
\begin{tcolorbox}[arc is angular]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
\begin{tcolorbox}[arc is curved]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a tcolorbox.

This is a tcolorbox.

N 2015-05-05

### /tcb/arc is curved

(no value, initially set)

This option resets the patch from /tcb/arc is angular. The original TikZ code is activated.

### /tcb/outer arc=<length>

(no default, initially unset)

Sets the outer radius of the four frame arcs to <length>.

```
\tcbset{colback=red!5!white,colframe=red!75!black}  
  
\begin{tcolorbox}[arc=4mm,outer arc=1mm]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a tcolorbox.

### /tcb/auto outer arc

(no value, initially set)

Sets the outer radius of the four frame arcs automatically in dependency of the inner radius given by /tcb/arc<sup>P.43</sup>.

#### 4.7.4 Spacing

`/tcb/boxsep=<length>` (no default, initially 1mm)

Sets a common padding of `<length>` between the text content and the frame of the box. This value is added to the key values of `left`, `right`, `top`, `bottom`, and `middle` at the appropriate places.

```
\tcbset{colback=red!5!white,colframe=red!75!black,width=(\linewidth-4mm)/2,
        before=,after=\hfill}

\begin{tcolorbox}[boxsep=5mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[boxsep=5mm,draft]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

frame: w=195.33255pt, h=48.97505pt

This is a **tcolorbox**.

upper: w=111.2724pt, h=6.296pt

interior: w=192.4873pt, h=46.1298pt

`/tcb/left=<length>` (style, no default, initially 4mm)

Sets the left space between all text parts and frame (additional to `boxsep`). This is an abbreviation for setting `lefttitle`, `leftupper`, and `leftlower` to the same value.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[left=0mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

`N 2017-02-16 /tcb/left*=<length>` (style, no default)

Sets `/tcb/left` such that `<length>` is the distance between the left bounding box and the text parts.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

This is some text.
\begin{tcolorbox}[grow to left by=5mm,left*=0mm,
    enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is some text.

This is a **tcolorbox**.

/tcb/lefttitle=<length>

(no default, initially 4mm)

Sets the left space between title text and frame (additional to boxsep).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[lefttitle=3cm,title=My Title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My Title

This is a **tcolorbox**.

/tcb/leftupper=<length>

(no default, initially 4mm)

Sets the left space between upper text and frame (additional to boxsep).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[leftupper=3cm,title=My Title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My Title

This is a **tcolorbox**.

/tcb/leftlower=<length>

(no default, initially 4mm)

Sets the left space between lower text and frame (additional to boxsep).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[leftlower=3cm]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

/tcb/right=<length>

(style, no default, initially 4mm)

Sets the right space between all text parts and frame (additional to boxsep). This is an abbreviation for setting `righttitle`, `rightupper`, and `rightlower` to the same value.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=5cm,right=2cm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

N 2017-02-16

### /tcb/right\*=<length>

(style, no default)

Sets /tcb/right<sup>P.47</sup> such that <length> is the distance between the right bounding box and the text parts.

```
\tcbsset{colback=red!5!white,colframe=red!75!black}

\flushright This is some text.
\begin{tcolorbox}[grow to right by=5mm,right*=0mm,
    align=right,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is some text.

This is a tcolorbox.

### /tcb/righttitle=<length>

(no default, initially 4mm)

Sets the right space between title text and frame (additional to boxsep).

```
\tcbsset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=5cm,righttitle=2cm,title=My very long title text]
This is a \textbf{tcolorbox} with standard upper box dimensions.
\end{tcolorbox}
```

My very long title text

This is a tcolorbox with standard upper box dimensions.

### /tcb/rightupper=<length>

(no default, initially 4mm)

Sets the right space between upper text and frame (additional to boxsep).

```
\tcbsset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=5cm,rightupper=2cm,title=My very long title text]
This is a \textbf{tcolorbox} with compressed upper box dimensions.
\end{tcolorbox}
```

My very long title text

This is a tcolorbox with compressed upper box dimensions.

`/tcb/rightlower=<length>` (no default, initially 4mm)

Sets the right space between lower text and frame (additional to `boxsep`).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[width=5cm,rightlower=2cm]
This is a \textbf{tcolorbox} with standard upper box dimensions.
\tcblower
This is the lower part with large space at right.
\end{tcolorbox}
```

This is a **tcolorbox** with standard upper box dimensions.

This is the lower part with large space at right.

`/tcb/top=<length>` (no default, initially 2mm)

Sets the top space between text and frame (additional to `boxsep`).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[top=0mm]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

`/tcb/toptitle=<length>` (no default, initially 0mm)

Sets the top space between title and frame (additional to `boxsep`).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[toptitle=3mm,title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

*/tcb/bottom*=*(length)* (no default, initially 2mm)

Sets the bottom space between text and frame (additional to *boxsep*).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[bottom=0mm]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

*/tcb/bottomtitle*=*(length)* (no default, initially 0mm)

Sets the bottom space between title and frame (additional to *boxsep*).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[bottomtitle=3mm,title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

*/tcb/middle*=*(length)* (no default, initially 2mm)

Sets the space between upper and lower text to the separation line (additional to *boxsep*).

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[middle=0mm,boxsep=0mm]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

#### 4.7.5 Size Shortcuts

`/tcb/size=<name>`

(no default, initially `normal`)

Sets all geometry keys with exception of `/tcb/width`<sup>P.41</sup> to predefined length values. For `<name>`, the following values are feasible:


- `normal`: normal sized boxes e.g. of width `\ linewidth`.
- `title`: title line sized boxes.
- `small`: small boxes e.g. for keyword highlighting.
- `fbox`: identical to the standard `\fbox`.
- `tight`: no padding space at all.
- `minimal`: no padding space, no box rules.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\foreach \s in {normal,title,small,fbox,tight,minimal} {
  \tcbox[size=\s,on line]{\s} }

\foreach \s in {normal,title,small,fbox,tight,minimal} {
  \tcbox[size=\s,on line,title=Test]{\s} }

\foreach \s in {normal,title,small,fbox,tight,minimal} {
  \begin{tcolorbox}[size=\s,on line,title=Test,width=2.2cm]
    \s \tcblower lower\end{tcolorbox} }
```

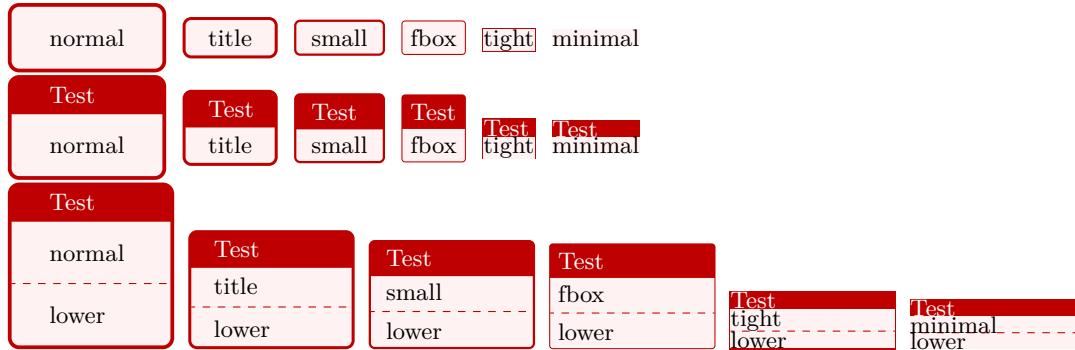

Predefined values

	normal	title	small	fbox	tight	minimal
boxrule	0.5mm	0.4mm	0.3mm	0.4pt	0.4pt	0.0pt
boxsep	1.0mm	1.0mm	1.0mm	3.0pt	0.0pt	0.0pt
left	4.0mm	2.0mm	1.0mm	0.0pt	0.0pt	0.0pt
right	4.0mm	2.0mm	1.0mm	0.0pt	0.0pt	0.0pt
top	2.0mm	0.25mm	0.0mm	0.0pt	0.0pt	0.0pt
bottom	2.0mm	0.25mm	0.0mm	0.0pt	0.0pt	0.0pt
toptitle	0.0mm	0.0mm	0.0mm	0.0pt	0.0pt	0.0pt
bottomtitle	0.0mm	0.0mm	0.0mm	0.0pt	0.0pt	0.0pt
middle	2.0mm	0.75mm	0.5mm	1.0pt	0.2pt	0.0pt
arc	1.0mm	0.75mm	0.5mm	1.0pt	0.0pt	0.0pt
outer arc	auto	auto	auto	auto	0.0pt	0.0pt

Sets the text width of the upper part to the current line width plus an optional *<length>*. This is achieved by changing the keys /tcb/width<sup>→ P. 41</sup> /tcb/enlarge left by<sup>→ P. 98</sup>, and /tcb/enlarge right by<sup>→ P. 98</sup> appropriately. The resulting box is overlapping into the left and right margin of the page. Note that this style option has to be given *after* all other geometry keys! Also see /tcb/grow sideways by<sup>→ P. 100</sup> and /tcb/spread sideways<sup>→ P. 103</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\textrit{Normal text for comparison:} \\
\lipsum[2]

\begin{tcolorbox}[oversize,title=Oversized box]
\lipsum[2]
\end{tcolorbox}

\begin{tcolorbox}[title=Normal box]
\lipsum[2]
\end{tcolorbox}
```

#### *Normal text for comparison:*

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

#### Oversized box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

#### Normal box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

#### 4.7.6 Toggle Left and Right

U 2017-02-16

`/tcb/toggle left and right=<toggle preset>` (default `evenpage`, initially `none`)

According to the `<toggle preset>`, the left and the right settings of the `tcolorbox` are switched or not. Feasible values are:

- `none`: no switching.
- `forced`: the values of the left and right rules, spaces, and corners are switched.
- `evenpage`: if the page is an even page, the values of the left and right rules, spaces, and corners are switched. This value also sets `/tcb/check odd page`<sup>→ P.118</sup> to `true`.

! Horizontal bounding box enlargements are not toggled by this option. They can be toggled independently by `/tcb/toggle enlargement`<sup>→ P.101</sup>. For example, `/tcb/oversize`<sup>→ P.52</sup> changes the bounding box.

```
% \usepackage{lipsum}
% \usetikzlibrary{patterns}
% \tcbuselibrary{skins,breakable}
\begin{tcolorbox}[enhanced,breakable,
  toggle left and right,sharp corners,
  boxrule=0mm,top=0mm,bottom=0mm,left=1mm,right=1mm,
  rightrule=1cm,colupper=blue!25!black,
  interior style={fill overzoom image=lichtspiel.jpg,fill image opacity=0.25},
  frame style={pattern=crosshatch dots light steel blue},
  overlay={%
    \begin{tcbclipframe}
    \tcbifoddpage{\coordinate (X) at ([xshift=-5mm]frame.east);}
      {\coordinate (X) at ([xshift=5mm]frame.west);}
    \fill[shading=ball,ball color=blue!50!white,opacity=0.5] (X) circle (4mm);
    \end{tcbclipframe}}
\lipsum[1-6]
\end{tcolorbox}
```

This example switches a `1cm` thick rule from the left to the right side depending on the page number. Thereby, the rule is always on the outer side of the double-sided paper. Additionally, a ball is drawn on the outer side with help of an overlay.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tinci-

dunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellen-  
tesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam.  
Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia.  
Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit  
ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim.  
Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc  
eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec  
et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.  
Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tin-  
cidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac  
habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc  
elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sol-  
licitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae  
tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta  
vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus  
semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam.  
Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in  
hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Ve-  
stibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi  
fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui  
cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac  
magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc.  
Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet  
vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie  
non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales  
cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede  
lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc.  
Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer  
arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

## 4.8 Corners

The four corners of any `tcolorbox` can be set individually as `/tcb/sharp corners` or as `/tcb/rounded corners`<sup>P. 56</sup>. These settings are also reflected in the behavior of `/tcb/borderline`<sup>P. 203</sup> and `/tcb/shadow`<sup>P. 214</sup> as one would expect.

By default, all four corners are *rounded*. So, only the `/tcb/sharp corners` option will be necessary for most use cases. The `/tcb/rounded corners`<sup>P. 56</sup> option can be used to revert a `/tcb/sharp corners` setting.

`/tcb/sharp corners=<position>` (default `all`, initially unset)

The `<position>` denotes one or more of the four box corners to be set as *sharp* corners. The not assigned corners will retain their mode. Feasible values for `<position>` are:

- `northwest`
- `northeast`
- `southwest`
- `southeast`
- `north`
- `south`
- `east`
- `west`
- `downhill`
- `uphill`
- `all`

```
\begin{tcolorbox}[colback=red!5!white,
  colframe=red!75!black,
  sharp corners=northwest ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a `tcolorbox`.

```
\begin{tcolorbox}[colback=red!5!white,
  colframe=red!75!black,
  sharp corners ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a `tcolorbox`.

## /tcb/rounded corners=<position>

(default `all`, initially `all`)

The `/tcb/rounded corners` can be used to revert a `/tcb/sharp corners`<sup>→ P. 55</sup> setting. The `<position>` denotes one or more of the four box corners to be set as *rounded* corners. The not assigned corners will retain their mode. Feasible values for `<position>` are<sup>3</sup>:

- `northwest`
- `northeast`
- `southwest`
- `southeast`
- `north`
- `south`
- `east`
- `west`
- `downhill`
- `uphill`
- `all`

```
\begin{tcolorbox}[colback=red!5!white,  
colframe=red!75!black,sharp corners,  
rounded corners=northwest ]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a `tcolorbox`.

## /tcb/sharpish corners

(style, no value)

Shortcut for setting `/tcb/arc`<sup>→ P. 43</sup> and `/tcb/outer arc`<sup>→ P. 45</sup> to `0pt`. With this setting, rounded corners will appear as quasi-sharp, but e. g. the shadow will be somewhat rounder than the shadow of really sharp corners.



Corners are still of type *rounded* with this option, but appear *sharp*. To switch back to rounded corners, one has to adapt `/tcb/arc`<sup>→ P. 43</sup> and `/tcb/outer arc`<sup>→ P. 45</sup>.

```
\begin{tcolorbox}[colback=red!5!white,  
colframe=red!75!black,  
sharpish corners ]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a `tcolorbox`.


<sup>3</sup>The graphical examples assume that the boxes were set to have sharp corners before.

The following examples will show the differences between `/tcb/rounded corners`<sup>→ P. 56</sup>, `/tcb/sharpish corners`<sup>→ P. 56</sup>, and `/tcb/sharp corners`<sup>→ P. 55</sup>. The later two give the same core box, but `/tcb/borderline`<sup>→ P. 203</sup> and `/tcb/shadow`<sup>→ P. 214</sup> settings are slightly different. The following examples use `/tcb/drop fuzzy shadow`<sup>→ P. 208</sup>.

### My title

This is a **tcolorbox**.


#### rounded corners

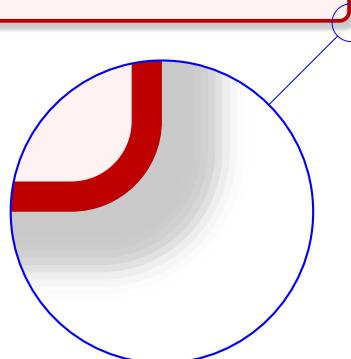

### My title

This is a **tcolorbox**.


#### sharpish corners

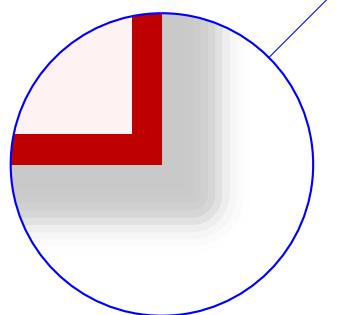

### My title

This is a **tcolorbox**.

#### sharp corners

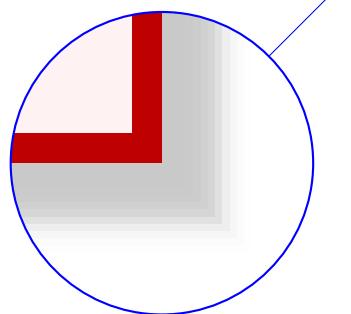

## 4.9 Transparency

! Transparency effects are likely to be used in conjunction with *jigsaw* skin variants, see 10.11 on page 227.

**/tcb/opacityframe=⟨fraction⟩** (no default, initially 1.0)

Sets the frame opacity of the box to the given ⟨fraction⟩.

```
\begin{tcolorbox}[opacityframe=0.25,  
colframe=red]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```




This is a tcolorbox.

**/tcb/opacityback=⟨fraction⟩** (no default, initially 1.0)

Sets the background opacity of the box to the given ⟨fraction⟩.

```
\begin{tcolorbox}[standard jigsaw,colframe=red,  
opacityframe=0.5, opacityback=0.5]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

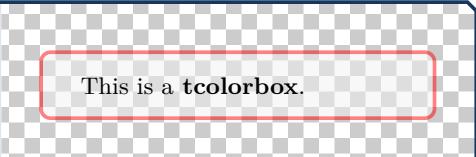


This is a tcolorbox.

Also see `/tcb/opacitybacklower`<sup>→ P. 249</sup> of the `skins` library.

**/tcb/opacitybacktitle=⟨fraction⟩** (no default, initially 1.0)

Sets the title background opacity of the box to the given ⟨fraction⟩.

```
\begin{tcolorbox}[standard jigsaw,colframe=red,  
opacityframe=0.5, opacitybacktitle=0.5,  
title filled, title=This is a title]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

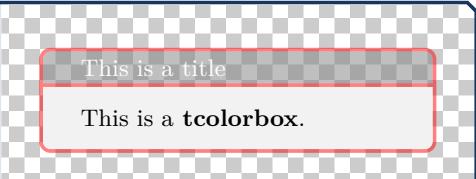

This is a title

This is a tcolorbox.

**/tcb/opacityfill=⟨fraction⟩** (style, no default, initially 1.0)

Sets the fill opacity for frame, interior and optionally the title background to the given ⟨fraction⟩.

```
\begin{tcolorbox}[standard jigsaw,colframe=red,  
opacityfill=0.7, title=This is a title]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```



This is a title

This is a tcolorbox.

`/tcb-opacityupper=<fraction>`

(no default, initially 1.0)

Sets the text opacity of the upper box part to the given `<fraction>`.

```
\begin{tcolorbox}[enhanced,opacityupper=0.5,  
interior ]  
  \style={preaction={fill=white},pattern=checkerboard  
  \color=gray!40}  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb-opacitylower=<fraction>`

(no default, initially 1.0)

Sets the text opacity of the lower box part to the given `<fraction>`.

```
\begin{tcolorbox}[enhanced,opacitylower=0.5,  
interior ]  
  \style={preaction={fill=white},pattern=checkerboard  
  \color=gray!40}  
This is a \textbf{tcolorbox}.  
\tcblower  
This is the lower part.  
\end{tcolorbox}
```

This is a tcolorbox.

This is the lower part.

`/tcb-opacitytext=<fraction>`

(no default, initially 1.0)

Sets the text opacity of the upper and the lower box part to the given `<fraction>`.

```
\begin{tcolorbox}[enhanced,opacitytext=0.5,  
interior ]  
  \style={preaction={fill=white},pattern=checkerboard  
  \color=gray!40}  
This is a \textbf{tcolorbox}.  
\tcblower  
This is the lower part.  
\end{tcolorbox}
```

This is a tcolorbox.

This is the lower part.

`/tcb-opacitytitle=<fraction>`

(no default, initially 1.0)

Sets the text opacity of the box title to the given `<fraction>`.

```
\begin{tcolorbox}[enhanced,opacitytitle=0.7,  
coltitle=black,  
fonttitle=\bfseries,title=This is a title,  
title ]  
  \style={preaction={fill=white},pattern=checkerboard  
  \color=gray!40}  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a title

This is a tcolorbox.

```
\begin{tcolorbox}[enhanced jigsaw,fonttitle=\bfseries,title=This is a title,  
opacityframe=0.5,opacityback=0.25,opacitybacktitle=0.25,opacitytext=0.8,  
colback=red!5!white,colframe=red!75!black,colbacktitle=yellow!20!red]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a title

This is a tcolorbox.

## 4.10 Height Control

In a typical usage scenario, the height of a `tcolorbox` is computed automatically to fit the content. Nevertheless, the height can be set to a fixed value or to fit commonly for several boxes, e.g. if boxes are set side by side.

**!** The height control keys are only applicable to unbreakable boxes. If a box is set to be `/tcb/breakable`<sup>→ P. 408</sup>, the height is always computed according to the *natural height*.

**/tcb/natural height** (no value, initially set)

Sets the total height of the colored box to its natural height depending on the box content.

**/tcb/height=<length>** (no default)

Sets the total height of the colored box to `<length>` independent of the box content. `<length>` is the minimum height of the box, if `/tcb/height plus` is larger than zero.

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,
colframe=blue!75!black,colback=white}

\begin{tcolorbox}[height=1cm,valign=center]
This box has a height of 1cm.
\end{tcolorbox}
\begin{tcolorbox}[height=2cm,valign=center]
This box has a height of 2cm.
\end{tcolorbox}
\begin{tcolorbox}[height=3cm,split=0.5,valign=center,valign lower=center]
This box has a height of 3cm.
\tcblower
Lower part.
\end{tcolorbox}
```

This box has a height of 1cm.

This box has a height of 2cm.

This box has a height of 3cm.

Lower part.

**/tcb/height plus=<length>** (no default, initially 0pt)

The box may extend a given fixed `/tcb/height` up to the given `<length>`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,bottom=1mm,
right=1mm,boxsep=0mm,width=3cm,nobeforeafter}

\begin{tcolorbox}[height=1cm]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[height=1cm,height plus=1cm]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[height=1cm,height plus=1cm]
This is a tcolorbox. This is a tcolorbox. This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

/tcb/**height** from=<min> to <max>

(style, no default)

Sets the box height to a dimension between <min> and <max>.

```
% \usepackage{lipsum}
\newtcolorbox{mybox}[1]{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,
bottom=1mm,right=1mm,boxsep=0mm,width=4.5cm,nobeforeafter,
height from=2cm to 8cm}

\begin{mybox}
This is a tcolorbox.
\end{mybox}
\begin{mybox}
This is a tcolorbox. This is a tcolorbox. This is a tcolorbox.
\end{mybox}
\begin{mybox}
\lipsum[2]
\end{mybox}
```

This is a tcolorbox.

This is a tcolorbox. This is a tcolorbox. This is a tcolorbox.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspen- disse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Ali- quam tincidunt urna. Nulla ullamcorper vestibulum tur- pis. Pellentesque cursus luc- tus mauris.

N 2014-10-31 /tcb/**text height**=<length>

(style, no default)

Sets the text height to <length>. This is the length from the top of the upper part to the bottom of the optional lower part. See also /tcb/text width<sup>→ P.41</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[text height=2cm]
This is a \textbf{tcolorbox} where the text area has a height of 2cm.
\end{tcolorbox}
```

This is a **tcolorbox** where the text area has a height of 2cm.

N 2014-11-07

### /tcb/add to height=<length>

(style, no default)

Adds <length> to the current height of the colored box. /tcb/height<sup>P. 60</sup> has to be set before this key is used! If this option is used several times, then the /tcb/height<sup>P. 60</sup> is also increased several times.

```
\tcbset{height=2cm,  
        valign=center,width=(\linewidth-2mm)/2,  
        before=,after=\hfill,colframe=blue!75!black,colback=white}  
  
\begin{tcolorbox}  
    This box has a height of 2cm.  
\end{tcolorbox}  
\begin{tcolorbox}[add to height=1cm]  
    This box has a height of 3cm.  
\end{tcolorbox}
```

This box has a height of 2cm.

This box has a height of 3cm.

N 2016-02-16

### /tcb/add to natural height=<length>

(style, no default)

The application of this option generates a box with natural height plus the given <length>. If this option is used several times, then the last setting of <length> wins. The resulting box is not considered a fixed height box and the implementation is quite different to /tcb/add to height.

```
\tcbset{valign=center,width=(\linewidth-2mm)/2,  
        before=,after=\hfill,colframe=blue!75!black,colback=white}  
  
\begin{tcolorbox}  
    This box has natural height.  
\end{tcolorbox}  
\begin{tcolorbox}[add to natural height=1cm]  
    This box has natural height plus 1 cm.  
\end{tcolorbox}
```

This box has natural height.

This box has natural height plus 1 cm.

/tcb/height fill=true|false|maximum

(default true, initially false)

If set to **true**, the height of the **tcolorbox** is set to the rest of the available vertical space of the current page. If set to **maximum**, the page is compressed as much as possible. Note that the **tcolorbox** is always set as its own paragraph using this option. Also see /tcb/text fill<sup>→ P. 76</sup>.



Note that the library `\lib{breakable}` has to be loaded to use this key!

This height control key is only applicable to unbreakable boxes, but it uses code from the library `\lib{breakable}`. The counterpart for breakable boxes is /tcb/height fixed for<sup>→ P. 414</sup>.

This option can and should not be used for boxes in boxes, but it can be used for boxes inside a **tcbraster**<sup>→ P. 313</sup>.

```
% \usepackage{lipsum}
% \tcbuselibrary{breakable}
\begin{tcolorbox}[height fill,
  colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
  title=Box which fills the rest of the page]
\lipsum[1]
\end{tcolorbox}
```

### Box which fills the rest of the page

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

If this option is used for a `tcolorbox` which is embedded inside another (outer) `tcolorbox` and if this outer `tcolorbox` has a fixed height, then the given `<fraction>` of the available text height of the outer `tcolorbox` is used as `/tcb/height→ P. 60` for the current `tcolorbox`. Otherwise, `/tcb/natural height→ P. 60` is applied for the current `tcolorbox`.

```
\tcbset{colframe=blue!75!black,colback=white,fonttitle=\bfseries}

\begin{tcolorbox}[title=Outer box with fixed height 3.5cm,height=3.5cm]
  \begin{tcolorbox}[title=Inner box,nobeforeafter,inherit height]
    This inner box matches the available space.
  \end{tcolorbox}
\end{tcolorbox}

\begin{tcolorbox}[title=Outer box with natural height]
  \begin{tcolorbox}[title=Inner box,nobeforeafter,inherit height]
    This inner box has its natural height.
  \end{tcolorbox}
\end{tcolorbox}

\begin{tcolorbox}[title=Outer box with fixed height 5cm,height=5cm]
  \begin{tcolorbox}[title=Inner box,nobeforeafter,inherit height]
    \begin{tcolorbox}[colframe=red,beforeafter skip=0pt,inherit height=0.6]
      Deeply nested box using 60 percent of the available space.
    \end{tcolorbox}
    \begin{tcolorbox}[colframe=red,beforeafter skip=0pt,inherit height=0.4]
      Deeply nested box using 40 percent of the available space.
    \end{tcolorbox}
  \end{tcolorbox}
\end{tcolorbox}
```

### Outer box with fixed height 3.5cm

Inner box

This inner box matches the available space.

### Outer box with natural height

Inner box

This inner box has its natural height.

### Outer box with fixed height 5cm

Inner box

Deeply nested box using 60 percent of the available space.

Deeply nested box using 40 percent of the available space.

**/tcb/square**

(style, no value)

Sets `/tcb/height`<sup>→ P. 60</sup> to match the width of the colored box.

```
\begin{tcolorbox}[width=3cm,
  colback=red!5!white,
  colframe=red!75!black,
  halign=center, valign=center,
  square]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a  
tcolorbox.

**/tcb/space=<fraction>**

(no default, initially 0)

If the height of a `tcolorbox` is not the natural height, the space difference between the forced and the natural size is distributed between the upper and the lower part of the box. This space could also be negative. `<fraction>` with a value between 0 and 1 is the amount of space which is added to the upper part, the rest is added to the lower part. If there is no lower part, then all of the space is added to the upper part always.

```
\tcbsset{width=(\linewidth-2mm)/3, before=, after=\hfill,
colframe=blue!75!black, colback=white, height=3cm}

\foreach \f in {0.2,0.4,0.7}
{\begin{tcolorbox}[space=\f]
  This is the upper part.
  \tcblower
  This is the lower part.
\end{tcolorbox}}
```

This is the upper part.  
This is the lower part.

This is the upper part.

This is the lower part.

This is the upper part.

This is the lower part.

**/tcb/space to upper**

(style)

This is an abbreviation for `space=1`, i.e. all extra space is added to the upper part.

**/tcb/space to lower**

(style, initially set)

This is an abbreviation for `space=0`, i.e. all extra space is added to the lower part (if there is any).


### /tcb/space to both

(style)

This is an abbreviation for `space=0.5`, i. e. the extra space equally distributed between the upper and the lower part.

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,
colframe=blue!75!black,colback=white,height=3cm}

\foreach \myspace in {space to upper,space to both,space to lower}
{\begin{tcolorbox}[\myspace]
  This is the upper part.
  \tcblower
  This is the lower part.
\end{tcolorbox}}
```

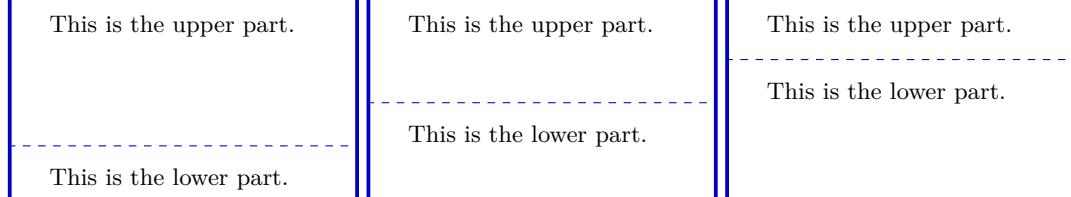

### /tcb/space to=<macro>

(no default, initially unset)

If the height of a `tcolorbox` is not the natural height, the space difference between the forced and the natural size is saved into the given local `<macro>`. This `<macro>` can and should be used inside the box content to add content which is vertically sized to match `<macro>`.



- The actual length saved into `<macro>` is adapted dynamically during several compilations – at least two, but maybe more.
- Due to the adaption algorithm, objects can be sized with `<macro>` plus any offset length.
- Never ever use `<macro>` multiplied with a factor. The only exception to this rule is that the space can be split into parts which sum to `<macro>`.
- Never use this in combination with `/tcb/fit`<sup>P. 462</sup>.

```
\begin{tcolorbox}[colframe=blue!75!black,colback=white,height=3cm,
space to=\myspace]
This is my box of height 3cm. The space is filled with a picture:\\[2mm]
\includegraphics[width=\linewidth,height=\myspace]{goldshade.png}\\[1mm]
This is some other text.
\end{tcolorbox}
```

This is my box of height 3cm. The space is filled with a picture:



This is some other text.

```
\begin{tcolorbox}[colframe=blue!75!black,colback=white,height=3cm,
  space to=\myspace]
\includegraphics[width=\linewidth,
  height=0.33\dimexpr\myspace]{blueshade.png}\[1mm]
This is my box of height 3cm.\[2mm]
\includegraphics[width=\linewidth,
  height=0.67\dimexpr\myspace]{goldshade.png}
\end{tcolorbox}
```



**/tcb/split=⟨fraction⟩** (no default)

If the height of a `tcolorbox` is not the natural height, the `⟨fraction⟩` with a value between 0 and 1 determines the positioning of the segmentation between the upper and the lower part. Here, 0 stands for top and 1 for bottom. Note that the box is split regardless of the actual dimensions of the text parts!

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,height=3cm,
colback=white,colframe=blue!75!black,valign=center,valign lower=center}

\foreach \f in {0.1,0.5,0.8}
{\begin{tcolorbox}[split=\f]
This is the upper part.
\tcblower
This is the lower part with a lot of text in several lines.
\end{tcolorbox}}
```

This is the upper part.

This is the lower part  
with a lot of text in sev-  
eral lines.

This is the upper part.

This is the lower part  
with a lot of text in sev-  
eral lines.

This is the upper part.

This is the lower part  
with a lot of text in sev-  
eral lines.

Boxes which are members of an `equal height group` will all get the same height, i.e. the maximum of all their natural heights. The `<id>` serves to distinguish between different height groups. Note that you have to compile twice to see changes and that height groups are global definitions.

```
\tcbset{width=(\linewidth-2mm)/3,before=,after=\hfill,arc=0mm,
colframe=blue!75!black,colback=white,fonttitle=\bfseries}

\begin{tcolorbox}[equal height group=A,adjusted title={One}]
My smallest box.
\end{tcolorbox}%
\begin{tcolorbox}[equal height group=A,adjusted title={Two}]
This box is also small.
\tcblower
But with a lower part.
\end{tcolorbox}%
\begin{tcolorbox}[equal height group=A,adjusted title={Three}]
This box contains a lot of text just to fill the space
with word flowing and flowing and flowing until the box
is filled with all of it.
\end{tcolorbox}\linebreak
%
\tcbset{width=(\linewidth-1mm)/2,before=,after=\hfill,arc=0mm,
colframe=red!75!black,colback=white}
%
\begin{tcolorbox}[equal height group=B]
Now, we use another equal height group.
\end{tcolorbox}%
\begin{tcolorbox}[equal height group=B,after=]
\begin{equation*}
\int \limits_0^1 x^2 = \frac{1}{3}.
\end{equation*}
\end{tcolorbox}
```

One	Two	Three
My smallest box.	This box is also small. But with a lower part.	This box contains a lot of text just to fill the space with word flowing and flowing and flowing until the box is filled with all of it.
Now, we use another equal height group.		$\int_0^1 x^2 = \frac{1}{3}.$



See 16 on page 311 for more equal height options.

`/tcb/minimum for equal height group=<id>:<length>` (no default, initially unset)

Plants a `<length>` into the equal height group with the given `<id>`. This ensures that the height will not drop below `<length>`. Note that you cannot reduce a computed height value by using this key with a small value. The difference to applying `/tcb/height`<sup>→ P. 60</sup> directly is that the boxes are never too small for their content.

```
\tcbset{colframe=blue!75!black,colback=white,arc=0mm,
        before=,after=\hfill,fonttitle=\bfseries,left=2mm,right=2mm,
        width=3.5cm,
        equal height group=C,
        minimum for equal height group=C:3.5cm}

\begin{tcolorbox}
My first box. All boxes will get 3.5cm times 3.5cm
if the content height is not too large.
\end{tcolorbox}%
\begin{tcolorbox}
My second box.
\tcblower
This is the lower part.
\end{tcolorbox}%
\begin{tcblisting}{}%
\textbf{Mixed}%
with a listing.
\end{tcblisting}%
\begin{tcolorbox}[title={Fourth box}]
My final box.
\end{tcolorbox}%

```

My first box. All boxes will get 3.5cm times 3.5cm if the content height is not too large.

My second box.

This is the lower part.

**Mixed** with a listing.

**Fourth box**

My final box.

N 2016-03-24

`/tcb/minimum for current equal height group=<length>` (no default, initially unset)

Sets `/tcb/minimum for equal height group` for the current equal height group. Apparently, this only works for an already known equal height group, i.e. `/tcb/equal height group`<sup>→ P. 68</sup> has to be set *before* this option is used. This option is likely to be used in combination with `/tcb/raster equal height`<sup>→ P. 322</sup>

```
% \tcbuselibrary{raster}
\begin{tcbitemize}[raster equal height,colframe=blue!75!black,colback=white,
raster every box/.style={minimum for current equal height group=2cm}]
\tcbitem A
\tcbitem B
\end{tcbitemize}
```

A

B

## /tcb/use height from group=<id>

(style, default current group)

Sets the current box to a fixed /tcb/height<sup>→ P. 60</sup> which is copied from an equal height group with the given <id>. If this height is not available during the current compilation, no fixed height setting is used. If <id> is omitted, the current equal height group is used which has to be set before by /tcb/equal height group<sup>→ P. 68</sup>.

Note that the natural height of the current box is not considered for computation of the group height. The main application for /tcb/use height from group is that the height can be adapted further by /tcb/add to height<sup>→ P. 62</sup>.

```
\begin{tcolorbox}[use height from group=C,add to height=-2cm,
  colframe=blue!75!black,colback=white]
  Height from group \enquote{C} of the previous example, but reduced by 2cm.
\end{tcolorbox}%
```

Height from group “C” of the previous example, but reduced by 2cm.

```
% \tcbuselibrary{raster}
Every line is inside an equal height group:
\begin{tcbraster}[raster equal height=rows,
  title=Box \thetcbasternum,
  enhanced,size=small,colframe=red!50!black,colback=red!10!white]
\begin{tcolorbox}First line\second line\
  The height of this box rules.\end{tcolorbox}
\begin{tcolorbox}[use height from group]Test\end{tcolorbox}
\begin{tcolorbox}[use height from group]
  First line\second line\end{tcolorbox}
\begin{tcolorbox}The height of this box rules.\end{tcolorbox}
\end{tcbraster}
```

Every line is inside an equal height group:

Box 1

First line  
second line  
The height of this box rules.

Box 2

Test

Box 3

First line  
second line

Box 4

The height of this box rules.

## \tcbheightfromgroup{<macro>}{<id>}

Saves the height from an equal height group with the given <id> to a <macro>. If this height is not available during the current compilation, <macro> is set to 0pt.

## 4.11 Box Content Additions

The following options introduce some arbitrary `<code>` to the content of a `tcolorbox`. These additions can be given at the beginning or at the ending of the title, the upper part, or the lower part.

U 2023-01-27

`/tcb/before title=<code>` (no default, initially unset)

The given `<code>` is placed *after* the color and font settings and *before* the content of the title. The `<code>` is appended by a final `\ignorespaces`.

```
\tcbsset{before title={\textcolor{yellow}{\large Important:}~-},  
colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[title=My title]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

**Important:** My title

This is a `tcolorbox`.

N 2023-01-27

`/tcb/before title*=<code>` (no default, initially unset)

The given `<code>` is placed *after* the color and font settings and *before* the content of the title. In contrast to `/tcb/before title`, no `\ignorespaces` is appended.

U 2023-01-27

`/tcb/after title=<code>` (no default, initially unset)

The given `<code>` is placed *after* the content of the title. The `<code>` is prepended by a leading `\unskip`.

```
\tcbsset{after title={\hfill\colorbox{Navy}{approved}},  
colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[title=My title]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

My title

approved

This is a `tcolorbox`.

N 2023-01-27

`/tcb/after title*=<code>` (no default, initially unset)

The given `<code>` is placed *after* the content of the title. In contrast to `/tcb/after title`, no `\unskip` is prepended.

/tcb/before upper=<code>

(no default, initially empty)

The given <code> is placed *after* the color and font settings and *before* the content of the upper part. The <code> is appended by a final \ignorespaces.

```
\tcbset{before upper={\textit{The story:}}\par,
        colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

*The story:*  
This is a **tcolorbox**.

N 2019-02-26

/tcb/before upper\*=<code>

(no default, initially unset)

The given <code> is placed *after* the color and font settings and *before* the content of the upper part. In contrast to /tcb/before upper, no \ignorespaces is appended. Use this for situations where \ignorespaces is not needed or causes harm.

```
\begin{tcolorbox}[size=small,tile,
    colback=yellow!20,colbacktitle=yellow!70!black,
    title=My table,hbox,center,center title,
    before upper*=\begin{tabular}{cc},
    after upper*=\end{tabular},
]
\multicolumn{2}{c}{Title} \\
one & two \\
three & four \\
\end{tcolorbox}
```

My table

Title	
one	two
three	four

**U** 2016-10-21

### /tcb/after upper=<code>

(no default, initially empty)

The given <code> is placed *after* the content of the upper part. The <code> is prepended by a leading \unskip.

```
\tcbset{after upper={\par\hfill\textrm{Read more next week}},  
       colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[title=My title]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

*Read more next week*

```
\begin{tcolorbox}[before upper=\fllqq,after upper=\frqq,  
               colback=red!5!white,colframe=red!75!black]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

«This is a **tcolorbox**.»

**N** 2016-10-21  
**U** 2019-02-28

### /tcb/after upper\*=<code>

(no default, initially unset)

The given <code> is placed *after* the content of the upper part. In contrast to /tcb/after upper, no \unskip is prepended. Use this for situations where \unskip is not needed or causes harm. See /tcb/before upper\*<sup>P.72</sup> for an example.



From version 3.80 to 3.94, this option prepended an \unskip to the given <code>.

From version 3.95 to 4.15, this option was deprecated.

From version 4.20, this option is re-established with changed semantic (no \unskip!).

`/tcb/before lower=<code>`

(no default, initially empty)

The given `<code>` is placed *after* the color and font settings and *before* the content of the lower part. The `<code>` is appended by a final `\ignorespaces`.

```
\tcbset{before lower=\textit{Behold:~},colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

*Behold:* This is the lower part.

N 2019-02-26

`/tcb/before lower*=<code>`

(no default, initially unset)

The given `<code>` is placed *after* the color and font settings and *before* the content of the lower part. In contrast to `/tcb/before lower`, no `\ignorespaces` is appended. Use this for situations where `\ignorespaces` is not needed or causes harm.

```
\begin{tcolorbox}[size=small,bicolor,sidebyside,center lower,
colback=yellow!30,colbacklower=yellow!20,colframe=yellow!80!black,
before lower*=\begin{tabular}{cc},
after lower*=\end{tabular},
]
My table
\tcblower
\multicolumn{2}{c}{Title} \\
one & two \\
three & four\\
\end{tcolorbox}
```

My table

Title	
one	two
three	four

**U** 2016-10-21

/tcb/after lower=<code>

(no default, initially empty)

The given <code> is placed *after* the content of the lower part. The <code> is prepended by a leading \unskip.

```
\begin{tcolorbox}[after lower=\textit{This is the end.},
  colback=red!5!white,colframe=red!75!black]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part. *This is the end.*

**N** 2016-10-21

**U** 2019-02-28

/tcb/after lower\*=<code>

(no default, initially unset)

The given <code> is placed *after* the content of the lower part. In contrast to /tcb/after upper<sup>P.73</sup>, no \unskip is prepended. Use this for situations where \unskip is not needed or causes harm.

```
\begin{tcolorbox}[before lower*=$,after lower*=$,
  colback=red!5!white,colframe=red!75!black]
This is a \textbf{tcolorbox}.
\tcblower
\sin^2(x)+\cos^2(x)=1.
\end{tcolorbox}
```

This is a **tcolorbox**.

$$\sin^2(x) + \cos^2(x) = 1.$$



From version 3.80 to 3.94, this option prepended an \unskip to the given <code>.

From version 3.95 to 4.15, this option was deprecated.

From version 4.20, this option is re-established with changed semantic (no \unskip!).

! If `/tcb/text fill` is used, one cannot have a lower part and the box is unbreakable.

N 2015-07-15

### `/tcb/text fill`

(style, no value)

This style sets `/tcb/before upper`<sup>→ P. 72</sup> and `/tcb/after upper`<sup>→ P. 73</sup> to embed the upper part with a minipage. If a fixed height was applied e.g. by `/tcb/height`<sup>→ P. 60</sup> or `/tcb/height fill`<sup>→ P. 63</sup>, this minipage gets a matching height. This allows to use vertical glue macros like `\vfill` to act like expected. If the box has no fixed height, setting `/tcb/text fill` has no other effect as making the box unbreakable.

```
\begin{tcolorbox}[colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
  height=8cm,text fill,
  title=My filled box]
This is a \textbf{tcolorbox}.
\par\vfill
\begin{center}
  My middle text.
\end{center}
\par\vfill
This is the end of my box.
\end{tcolorbox}
```

My filled box

This is a **tcolorbox**.

My middle text.

This is the end of my box.

This style sets /tcb/before upper<sup>→ P. 72</sup> and /tcb/after upper<sup>→ P. 73</sup> and several geometry keys to support a `tabular*` with the given `<preamble>`. The packages `array` and `colortbl` have to be loaded separately.

```
% \usepackage{array}
% \usepackage{colortbl} - or - \usepackage[table]{xcolor}
\tcbset{enhanced,fonttitle=\bfseries\large,fontupper=\normalsize\sffamily,
colback=yellow!10!white,colframe=red!50!black,colbacktitle=Salmon!30!white,
coltitle=black,center title}

\begin{tcolorbox}[tabulars={@{\extracolsep{\fill}\hspace{5mm}}lrrrrr@{\hspace{5mm}}},%
boxrule=0.5pt,title=My table]
Group & One & Two & Three & Four & Sum \\ \hline
Red & 1000.00 & 2000.00 & 3000.00 & 4000.00 & 10000.00 \\ \hline
Green & 2000.00 & 3000.00 & 4000.00 & 5000.00 & 14000.00 \\ \hline
Blue & 3000.00 & 4000.00 & 5000.00 & 6000.00 & 18000.00 \\ \hline
Sum & 6000.00 & 9000.00 & 12000.00 & 15000.00 & 42000.00
\end{tcolorbox}
```

My table					
Group	One	Two	Three	Four	Sum
Red	1000.00	2000.00	3000.00	4000.00	10000.00
Green	2000.00	3000.00	4000.00	5000.00	14000.00
Blue	3000.00	4000.00	5000.00	6000.00	18000.00
Sum	6000.00	9000.00	12000.00	15000.00	42000.00

This is a variant of /tcb/tabulars which adds some `<code>` before the table starts.

```
% \usepackage{array}
% \usepackage{colortbl} - or - \usepackage[table]{xcolor}
\tcbset{enhanced,fonttitle=\bfseries\large,fontupper=\normalsize\sffamily,
colback=yellow!10!white,colframe=red!50!black,colbacktitle=Salmon!30!white,
coltitle=black,center title}

\begin{tcolorbox}[tabulars*={\arrayrulewidth0.5mm\renewcommand\arraystretch{1.4}}%
{@{\extracolsep{\fill}\hspace{20mm}}lrlr@{\hspace{20mm}}},%
title=My table]
One & Two & Three \\ \hline
1000.00 & 2000.00 & 3000.00 \\ \hline
2000.00 & 3000.00 & 4000.00
\end{tcolorbox}
```

My table		
One	Two	Three
1000.00	2000.00	3000.00
2000.00	3000.00	4000.00

! If `/tcb/tabularx` or `/tcb/tabularx*` are used, one cannot have a lower part.

`/tcb/tabularx=<preamble>` (style)

This style sets `/tcb/before upper`<sup>→ P. 72</sup> and `/tcb/after upper`<sup>→ P. 73</sup> and several geometry keys to support a `tabularx` with the given `<preamble>`. The packages `tabularx` [3], `array`, and `colortbl` have to be loaded separately.

```
% \usepackage{array,tabularx}
% \usepackage{colortbl} - or - \usepackage[table]{xcolor}
\newcolumntype{Y}{>{\raggedleft\arraybackslash}X}% see tabularx
\tcbset{enhanced,fonttitle=\bfseries\large,fontupper=\normalsize\sffamily,
colback=yellow!10!white,colframe=red!50!black,colbacktitle=Salmon!30!white,
coltitle=black,center title}

\begin{tcolorbox}[tabularx={X||Y|Y|Y|Y||Y},title=My table]
Group & One & Two & Three & Four & Sum \\ \hline \hline
Red & 1000.00 & 2000.00 & 3000.00 & 4000.00 & 10000.00 \\ \hline
Green & 2000.00 & 3000.00 & 4000.00 & 5000.00 & 14000.00 \\ \hline
Blue & 3000.00 & 4000.00 & 5000.00 & 6000.00 & 18000.00 \\ \hline
Sum & 6000.00 & 9000.00 & 12000.00 & 15000.00 & 42000.00
\end{tcolorbox}
```

My table					
Group	One	Two	Three	Four	Sum
Red	1000.00	2000.00	3000.00	4000.00	10000.00
Green	2000.00	3000.00	4000.00	5000.00	14000.00
Blue	3000.00	4000.00	5000.00	6000.00	18000.00
Sum	6000.00	9000.00	12000.00	15000.00	42000.00

`/tcb/tabularx*=<code>{<preamble>}` (style)

This is a variant of `/tcb/tabularx` which adds some `<code>` before the table starts.

```
% \usepackage{array,tabularx}
% \usepackage{colortbl} - or - \usepackage[table]{xcolor}
\tcbset{enhanced,fonttitle=\bfseries\large,fontupper=\normalsize\sffamily,
colback=yellow!10!white,colframe=red!50!black,colbacktitle=Salmon!30!white,
coltitle=black,center title}

\begin{tcolorbox}[tabularx*={\arrayrulewidth0.5mm}{X|X|X},title=My table]
One & Two & Three \\ \hline \hline
1000.00 & 2000.00 & 3000.00 \\ \hline
2000.00 & 3000.00 & 4000.00
\end{tcolorbox}
```

My table		
One	Two	Three
1000.00	2000.00	3000.00
2000.00	3000.00	4000.00

/tcb/tikz upper=<options>

(style)

This style adds a centered `tikzpicture` environment to the start and end of the upper part. The `<options>` may be given as TikZ picture options.

```
\begin{tcolorbox}[tikz upper,fonttitle=\bfseries,colback=white,colframe=black,
               title=\tikzname\ drawing]
  \path[fill=yellow,draw=yellow!75!red] (0,0) circle (1cm);
  \fill[red] (45:5mm) circle (1mm);
  \fill[red] (135:5mm) circle (1mm);
  \draw[line width=1mm,red] (215:5mm) arc (215:325:5mm);
\end{tcolorbox}
```

TikZ drawing



/tcb/tikz lower=<options>

(style)

This style adds a centered `tikzpicture` environment to the start and end of the lower part. The `<options>` may be given as TikZ picture options.

```
% \tcbuselibrary{skins, listings}

\begin{tcblisting}[tikz lower,listing side text,fonttitle=\bfseries,
                  bicolor,colback=LightBlue!50!white,colbacklower=white,colframe=black,
                  righthand width=3cm,title=\tikzname\ drawing]
  \path[fill=yellow,draw=yellow!75!red]
    (0,0) circle (1cm);
  \fill[red] (45:5mm) circle (1mm);
  \fill[red] (135:5mm) circle (1mm);
  \draw[line width=1mm,red]
    (215:5mm) arc (215:325:5mm);
\end{tcblisting}
```

TikZ drawing

```
\path[fill=yellow,draw=yellow!75!red]
  (0,0) circle (1cm);
\fill[red] (45:5mm) circle (1mm);
\fill[red] (135:5mm) circle (1mm);
\draw[line width=1mm,red]
  (215:5mm) arc (215:325:5mm);
```



/tcb/tikznode upper=⟨options⟩

(style)

This style places the upper part content into a centered TikZ node. The ⟨options⟩ may be given as TikZ node options. This style is especially useful for boxes with multiline texts which are fitted to the text width.

```
% tcbuselibrary{skins}
\newtcbx{\headline}[1][]{enhanced,center,
  ignore nobreak,fontupper=\Large\bfseries,
  colframe=red!50!black,colback=red!10!white,
  drop fuzzy shadow=yellow,tikznode upper,#1}

\headline{Important\\Headline}
```

Important  
Headline

/tcb/tikznode lower=⟨options⟩

(style)

This style places the lower part content into a centered TikZ node. The ⟨options⟩ may be given as TikZ node options.

```
\begin{tcolorbox}[bicolor,colback=LightBlue!50!white,colbacklower=white,
  colframe=black,tikznode lower={inner sep=2pt,draw=red,fill=yellow}]
Upper part.
\tcblower
Lower part.
\end{tcolorbox}
```

Upper part.

Lower part.

/tcb/tikznode=⟨options⟩

(style)

Shortcut for setting /tcb/tikznode upper and /tcb/tikznode lower the same time.

/tcb/varwidth upper=⟨length⟩

(style, default /tcb/width<sup>→ P. 41</sup>)

This style places the upper part content into a varwidth environment. This style needs the varwidth<sup>→ CTAN</sup> package [1] to be loaded manually. The resulting box has a maximal width of ⟨length⟩. This option is only senseful for a \tcbbox<sup>→ P. 14</sup>.

```
% \usepackage{varwidth}
\newtcbx{\varbox}[1]{colframe=red!50!black,
  colback=red!10!white,varwidth upper}

\varbox{Short text.}
\varbox{This box contains is a longer text
  which is broken.}
```

Short text.

This box contains is a longer  
text which is broken.

N 2023-10-16

/tcb/environment upper=<name> (style)  
/tcb/environment upper args={<name>}{<code>} (style)

This shortcut style sets /tcb/before upper\*<sup>→ P. 72</sup> to \begin{<name>} and /tcb/after upper\*<sup>→ P. 73</sup> to \end{<name>}, i.e. the upper part is enclosed by the environment <name>. The second variant also places <code> after \begin{<name>}.

```
\begin{tcolorbox}[colback=yellow!30, colframe=yellow!80!black,  
environment upper=itemize  
]  
  \item one  
  \item two  
\end{tcolorbox}
```

- one
- two

Note that you may need *additional* brackets around <code>, if <code> contains some parameter(s) for the environment <name>.

```
\begin{tcolorbox}[center upper,  
colback=yellow!30, colframe=yellow!80!black,  
environment upper args={tabular}{{cc}}]  
]  
  one & two \\  
  three & four\\  
\end{tcolorbox}
```

one	two
three	four

```
\begin{tcolorbox}[colback=yellow!30, colframe=yellow!80!black,  
environment upper args = {list}{{\bfseries Fact:}}  
{\setlength\itemsep{0pt}\setlength\parsep{0pt}}]  
]  
  \item Blue is red  
  \item Red is green  
\end{tcolorbox}
```

**Fact:** Blue is red  
**Fact:** Red is green



/tcb/environment upper and friends (following) cannot be used to wrap another tcolorbox-based environment, i.e. never use /tcb/environment upper=tcolorbox or /tcb/environment upper=etc-derived-from-tcolorbox.

N 2023-10-16	<code>/tcb/environment lower=&lt;name&gt;</code>	(style)
N 2023-10-16	<code>/tcb/environment lower args={&lt;name&gt;}{{&lt;code&gt;}}</code>	(style)

This shortcut style sets `/tcb/before lower*`<sup>→ P. 74</sup> to `\begin{<name>}` and `/tcb/after lower*`<sup>→ P. 75</sup> to `\end{<name>}`, i.e. the lower part is enclosed by the environment `<name>`. The second variant also places `<code>` after `\begin{<name>}`. Note that you may need *additional* brackets around `<code>`, if `<code>` contains some parameter(s) for the environment `<name>`.

See `/tcb/environment upper`<sup>→ P. 81</sup> for analog examples.

N 2023-10-16	<code>/tcb/environment title=&lt;name&gt;</code>	(style)
N 2023-10-16	<code>/tcb/environment title args={&lt;name&gt;}{{&lt;code&gt;}}</code>	(style)

This shortcut style sets `/tcb/before title*`<sup>→ P. 71</sup> to `\begin{<name>}` and `/tcb/after title*`<sup>→ P. 71</sup> to `\end{<name>}`, i.e. the title text is enclosed by the environment `<name>`. The second variant also places `<code>` after `\begin{<name>}`. Note that you may need *additional* brackets around `<code>`, if `<code>` contains some parameter(s) for the environment `<name>`.

See `/tcb/environment upper`<sup>→ P. 81</sup> for analog examples.

## 4.12 Overlays

With an overlay, arbitrary  $\langle\text{graphical code}\rangle$  can be added to a `tcolorbox`. This code is executed *after* the frame and interior are drawn and *before* the text content is drawn. Therefore, you can decorate the `tcolorbox` with your own extensions. Common special cases are *watermarks* which are implemented using overlays. See Subsection 10.3 from page 191 if you want to add *watermarks*.



If you use the core package only, the  $\langle\text{graphical code}\rangle$  has to be pgf code and there is not much assistance for positioning. Therefore, the usage of the `/tcb/enhanced`<sup>→ P. 235</sup> mode from the library skins is recommended which allows `tikz` code and gives access to `/tcb/geometry nodes`<sup>→ P. 160</sup> for positioning.

`/tcb/overlay=⟨graphical code⟩`

(no default, initially unset)

Adds  $\langle\text{graphical code}\rangle$  to the box drawing process. This  $\langle\text{graphical code}\rangle$  is drawn *after* the frame and interior and *before* the text content.

```
% \tcbuselibrary{skins} % preamble
\tcbset{frogbox/.style={enhanced,colback=green!10,colframe=green!65!black,
enlarge top by=5.5mm,
overlay={\foreach \x in {2cm,3.5cm} {
\begin{scope}[shift={({[xshift=\x]frame.north west})}]
\path[draw=green!65!black,fill=green!10,line width=1mm] (0,0) arc (0:180:5mm);
\path[fill=black] (-0.2,0) arc (0:180:1mm);
\end{scope}}}}}

\begin{tcolorbox}[frogbox,title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```



My title

This is a `tcolorbox`.

```
% \usetikzlibrary{patterns} % preamble
% \tcbuselibrary{skins}      % preamble
\tcbset{ribbonbox/.style={enhanced,colback=red!5!white,colframe=red!75!black,
fonttitle=\bfseries,
overlay={\path[fill=blue!75!white,draw=blue,double=white!85!blue,
preaction={opacity=0.6,fill=blue!75!white},
line width=0.1mm,double distance=0.2mm,
pattern=fivepointed stars,pattern color=white!75!blue]
([xshift=-0.2mm,yshift=-1.02cm]frame.north east)
-- ++(-1,1) -- ++(-0.5,0) -- ++(1.5,-1.5) -- cycle;}}}

\begin{tcolorbox}[ribbonbox,title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a `tcolorbox`.

This is the lower part.

<code>/tcb/no overlay</code>	(style, no default, initially set)
Removes the overlay if set before.	
<code>/tcb/overlay broken=&lt;graphical code&gt;</code>	(no default, initially unset)
If the box is set to be <code>/tcb/breakable</code> <sup>P. 408</sup> and is broken actually, then the <code>&lt;graphical code&gt;</code> is added to the box drawing process. <code>/tcb/overlay</code> <sup>P. 83</sup> overwrites this key.	
<code>/tcb/overlay unbroken=&lt;graphical code&gt;</code>	(no default, initially unset)
If the box is set to be <code>/tcb/breakable</code> <sup>P. 408</sup> but is not broken actually or if the box is set to be <code>/tcb/unbreakable</code> <sup>P. 409</sup> , then the <code>&lt;graphical code&gt;</code> is added to the box drawing process. <code>/tcb/overlay</code> <sup>P. 83</sup> overwrites this key.	
<code>/tcb/overlay first=&lt;graphical code&gt;</code>	(no default, initially unset)
If the box is set to be <code>/tcb/breakable</code> <sup>P. 408</sup> and is broken actually, then the <code>&lt;graphical code&gt;</code> is added to the box drawing process for the <i>first</i> part of the break sequence. <code>/tcb/overlay</code> <sup>P. 83</sup> overwrites this key.	
<code>/tcb/overlay middle=&lt;graphical code&gt;</code>	(no default, initially unset)
If the box is set to be <code>/tcb/breakable</code> <sup>P. 408</sup> and is broken actually, then the <code>&lt;graphical code&gt;</code> is added to the box drawing process for the <i>middle</i> parts (if any) of the break sequence. <code>/tcb/overlay</code> <sup>P. 83</sup> overwrites this key.	
<code>/tcb/overlay last=&lt;graphical code&gt;</code>	(no default, initially unset)
If the box is set to be <code>/tcb/breakable</code> <sup>P. 408</sup> and is broken actually, then the <code>&lt;graphical code&gt;</code> is added to the box drawing process for the <i>last</i> part of the break sequence. <code>/tcb/overlay</code> <sup>P. 83</sup> overwrites this key.	
<code>/tcb/overlay unbroken and first=&lt;graphical code&gt;</code>	(no default, initially unset)
This is an optimized abbreviation for setting <code>/tcb/overlay unbroken</code> and <code>/tcb/overlay first</code> together. <code>/tcb/overlay</code> <sup>P. 83</sup> overwrites this key.	
<code>/tcb/overlay middle and last=&lt;graphical code&gt;</code>	(no default, initially unset)
This is an optimized abbreviation for setting <code>/tcb/overlay middle</code> and <code>/tcb/overlay last</code> together. <code>/tcb/overlay</code> <sup>P. 83</sup> overwrites this key.	
<code>/tcb/overlay unbroken and last=&lt;graphical code&gt;</code>	(no default, initially unset)
This is an optimized abbreviation for setting <code>/tcb/overlay unbroken</code> and <code>/tcb/overlay last</code> together. <code>/tcb/overlay</code> <sup>P. 83</sup> overwrites this key.	
<code>/tcb/overlay first and middle=&lt;graphical code&gt;</code>	(no default, initially unset)
This is an optimized abbreviation for setting <code>/tcb/overlay first</code> and <code>/tcb/overlay middle</code> together. <code>/tcb/overlay</code> <sup>P. 83</sup> overwrites this key.	

N 2014-09-19

This example demonstrates the application of break sequence specific overlay options. Here, we define an environment `myexample` based on `tcolorbox` where the visible drawing is done totally by overlay keys.

Here, the first application of `myexample` produces an unbroken `tcolorbox`. The frame is drawn by the code given with `/tcb/overlay unbroken`.

The second application of `myexample` is broken into several parts which are drawn by the codes given with `/tcb/overlay first`, `/tcb/overlay middle`, and `/tcb/overlay last`.

```
% Preamble:
%\usepackage{lipsum}
%\tcbuselibrary{skins,breakable}
%\newcounter{example}
```

```

\colorlet{colexam}{red!75!black}
\newtcolorbox[use counter=example]{myexample}{%
    empty,title={Example \thetcbcounter},attach boxed title to top left,
    boxed title style={empty,size=minimal,toprule=2pt,top=4pt,
        overlay={\draw [colexam, line width=2pt]
            ([yshift=-1pt]frame.north west)--([yshift=-1pt]frame.north east);}},
    coltitle=colexam,fonttitle=\Large\bfseries,
    before=\par\medskip\noindent,parbox=false,boxsep=0pt,left=0pt,right=3mm,top=4pt,
    breakable,pad at break*=0mm,vfill before first,
    overlay unbroken={\draw [colexam, line width=1pt]
        ([yshift=-1pt]title.north east)--([xshift=-0.5pt,yshift=-1pt]title.north-|frame.east)
        --([xshift=-0.5pt]frame.south east)--(frame.south west); },
    overlay first={\draw [colexam, line width=1pt]
        ([yshift=-1pt]title.north east)--([xshift=-0.5pt,yshift=-1pt]title.north-|frame.east)
        --([xshift=-0.5pt]frame.south east); },
    overlay middle={\draw [colexam, line width=1pt] ([xshift=-0.5pt]frame.north east)
        --([xshift=-0.5pt]frame.south east); },
    overlay last={\draw [colexam, line width=1pt] ([xshift=-0.5pt]frame.north east)
        --([xshift=-0.5pt]frame.south east)--(frame.south west); },%
}
}

\begin{myexample}
\lipsum[1]
\end{myexample}

\begin{myexample}
\lipsum[2-11]
\end{myexample}

\lipsum[12] % following text

```

## Example 1

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

## Example 2

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed

lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetur at, consectetur sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

Morbi luctus, wisi viverra faucibus pretium, nibh est placerat odio, nec commodo wisi enim eget quam. Quisque libero justo, consectetur a, feugiat vitae, porttitor eu, libero. Suspendisse sed mauris vitae elit sollicitudin malesuada. Maecenas ultricies eros sit amet ante. Ut venenatis velit. Maecenas sed mi eget dui varius euismod. Phasellus aliquet volutpat odio. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Pellentesque sit amet pede ac sem eleifend consectetur. Nullam elementum, urna vel imperdiet sodales, elit ipsum pharetra ligula, ac pretium ante justo a nulla. Curabitur tristique arcu eu metus. Vestibulum lectus. Proin mauris. Proin eu nunc eu urna hendrerit faucibus. Aliquam auctor, pede consequat laoreet varius, eros tellus scelerisque quam, pellentesque hendrerit ipsum dolor sed augue. Nulla nec lacus.

Suspendisse vitae elit. Aliquam arcu neque, ornare in, ullamcorper quis, commodo eu, libero.

Fusce sagittis erat at erat tristique mollis. Maecenas sapien libero, molestie et, lobortis in, sodales eget, dui. Morbi ultrices rutrum lorem. Nam elementum ullamcorper leo. Morbi dui. Aliquam sagittis. Nunc placerat. Pellentesque tristique sodales est. Maecenas imperdiet lacinia velit. Cras non urna. Morbi eros pede, suscipit ac, varius vel, egestas non, eros. Praesent malesuada, diam id pretium elementum, eros sem dictum tortor, vel consectetur odio sem sed wisi.

Sed feugiat. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Ut pellentesque augue sed urna. Vestibulum diam eros, fringilla et, consectetur eu, nonummy id, sapien. Nullam at lectus. In sagittis ultrices mauris. Curabitur malesuada erat sit amet massa. Fusce blandit. Aliquam erat volutpat. Aliquam euismod. Aenean vel lectus. Nunc imperdiet justo nec dolor.

Etiam euismod. Fusce facilisis lacinia dui. Suspendisse potenti. In mi erat, cursus id, nonummy sed, ullamcorper eget, sapien. Praesent pretium, magna in eleifend egestas, pede pede pretium lorem, quis consectetur tortor sapien facilisis magna. Mauris quis magna varius nulla scelerisque imperdiet. Aliquam non quam. Aliquam porttitor quam a lacus. Praesent vel arcu ut tortor cursus volutpat. In vitae pede quis diam bibendum placerat. Fusce elementum convallis neque. Sed dolor orci, scelerisque ac, dapibus nec, ultricies ut, mi. Duis nec dui quis leo sagittis commodo.

Floating box from `floatplacement`

This floating box is placed at the top of a page.

### 4.13 Floating Objects

`/tcb/floatplacement=(values)` (no default, initially `htb`)

Sets `(values)` as default values for the usage of `/tcb/float` and `/tcb/float*`. Feasible are the usual parameters for floating objects.

```
\tcbset{enhanced,colback=red!5!white,colframe=red!75!black,  
watermark color=red!15!white}  
  
\begin{tcolorbox}[floatplacement=t,float,  
title=Floating box from |floatplacement|,  
watermark text={I am floating}]  
This floating box is placed at the top of a page.  
\end{tcolorbox}
```

`/tcb/float=(values)` (default from `floatplacement`)

Turns the box to a floating object where `(values)` are the usual parameters for such floating objects. If they are not used, the placement uses the default values given by `floatplacement`.

```
\begin{tcolorbox}[float, title=Floating box from |float|,  
enhanced,watermark text={I'm also floating}]  
This box floats to a feasible place automatically. You do not have to  
use a numbering for this floating object.  
\end{tcolorbox}
```

Floating box from `float`

This box floats to a feasible place automatically. You do not have to use a numbering for this floating object.

`/tcb/float*=(values)` (default from `floatplacement`)

Identical to `/tcb/float`, but for wide boxes spanning the whole page width of two column documents or in conjunction with the packages `multicol` or `paracol`. Note that you have to set `width=\textwidth` additionally, if the box should span the whole page width in these cases!

```
\begin{tcolorbox}[float*=b, title=Floating box from |float*|,width=\textwidth,  
enhanced,watermark text={I'm also floating}]  
In this single column document, you will see no difference to |float|.   
\end{tcolorbox}
```

`/tcb/nofloat` (style, initially set)

Turns the floating behavior off.

Floating box from `float*`

In this single column document, you will see no difference to `float`.


N 2014-09-19

/tcb/every float={⟨code⟩}

(no default, initially empty)

For floating objects, the /tcb/before<sup>→ P. 90</sup> and /tcb/after<sup>→ P. 90</sup> settings are ignored. Instead, /tcb/before float and /tcb/after float can be used. Further, with /tcb/every float, the given ⟨code⟩ is inserted before a floating box. If the box is /tcb/breakable<sup>→ P. 408</sup>, the given ⟨code⟩ is inserted before every part of the break sequence. The most common use case is every float=\centering.

```
\tcbbox[float=htb,title={Floating box},every float=\centering,  
colback=blue!50!black,colframe=blue!50!white,colbacktitle=blue!10!white,  
coltitle=black,center title]  
\includegraphics[height=6cm]{lichtspiel.jpg}
```

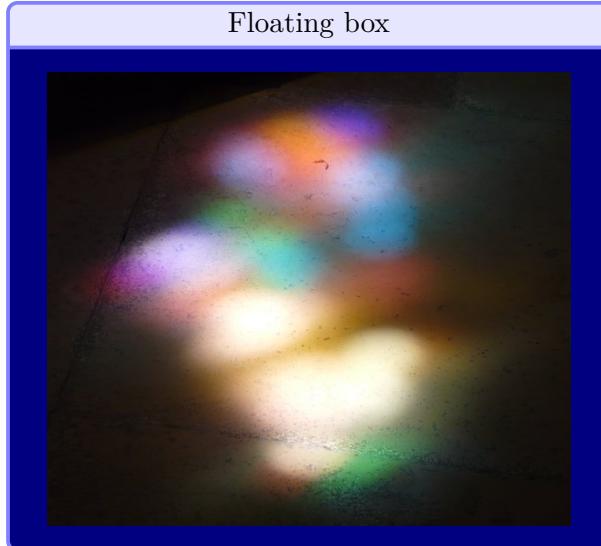

N 2022-06-21

/tcb/before float={⟨code⟩}

(no default, initially empty)

N 2022-06-21

/tcb/after float={⟨code⟩}

(no default, initially empty)

For floating objects, the /tcb/before<sup>→ P. 90</sup> and /tcb/after<sup>→ P. 90</sup> settings are ignored. Code can be inserted after the begin of the float environment and before /tcb/every float with /tcb/before float and between the end of the box and the end of the float environment with /tcb/after float.



These options are not compatible with /tcb/breakable<sup>→ P. 408</sup> floating objects and are ignored, if the box is set to be breakable.

## 4.14 Embedding into the Surroundings

Typically, but not necessarily, a `tcolorbox` is put inside a separate paragraph and has some vertical space before and after it. This behavior is controlled by the keys `/tcb/before` and `/tcb/after`.

Before version 4.40, the default setting for `/tcb/before` and `/tcb/after` was given by `/tcb/autoparskip→ P.94`. Starting with version 4.40, the default setting is given by `/tcb/before skip balanced→ P.91` and `/tcb/after skip balanced→ P.91`.

Note that old documents may need adaptions of page breaks.

Alternatively, the old default setting can be restored by using

```
\tcbsetforeverylayer{autoparskip}
```

inside the document preamble.

**/tcb/before=⟨code⟩** (no default, initially see `/tcb/before skip balanced→ P.91`)

Sets the ⟨code⟩ which is executed before the colored box. It is not used for floating boxes. Also, it is not used, if the box follows a heading immediately and `/tcb/ignore nobreak→ P.96` is set to `false`.

**/tcb/after=⟨code⟩** (no default, initially see `/tcb/after skip balanced→ P.91`)

Sets the ⟨code⟩ which is executed after the colored box. It is not used for floating boxes.

**/tcb/nobeforeafter** (style, no value)

Abbreviation for clearing the keys `before` and `after`. The colored box is not put into a paragraph and there is no space before or after the box.

```
\tcbset{myone/.style={colback=LightGreen,colframe=DarkGreen,  
equal height group=nobefaf,width=\linewidth/4,nobeforeafter}}  
\begin{tcolorbox}[myone,title=Box 1]Box 1\end{tcolorbox}%  
\begin{tcolorbox}[myone,title=Box 2]Box 2\end{tcolorbox}%  
\begin{tcolorbox}[myone,title=Box 3]Box 3\end{tcolorbox}%  
\begin{tcolorbox}[myone,title=Box 4]Box 4\end{tcolorbox}
```



**/tcb/force nobeforeafter** (style, no value)

Forces the setting of `/tcb/nobeforeafter` even if `/tcb/before` and `/tcb/after` are set to other values later. Do not use this option globally unless you *really* know what you do. Note that embedded boxes do not inherit this forced clearance.

N 2020-09-25 **/tcb/before skip balanced=⟨glue⟩** (no default, initially  $0.5\baselineskip$  plus 2pt)

Inserts some vertical space before the colored box. This style sets **/tcb/before** → P.90.  
If the depth of the preceding TeX box is between 0pt and  $0.3\baselineskip$ , the distance between the *baseline* of the preceding TeX box and the tcolorbox is set to  $\langle glue \rangle + 0.3\baselineskip$ .

If the depth is larger, the distance of the preceding TeX box and the tcolorbox is set to  $\langle glue \rangle$ .

Alternatively, see **/tcb/before skip** → P.92 which ignores the *baseline*.

```
Some text.  
\begin{tcolorbox}[before skip balanced=1cm,  
    colframe=red!50!white]  
    This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

Some text.

This is a **tcolorbox**.

N 2020-09-25 **/tcb/after skip balanced=⟨glue⟩** (no default, initially  $0.5\baselineskip$  plus 2pt)

Inserts some vertical space of the given  $\langle glue \rangle$  after the colored box. This style sets **/tcb/after** → P.90. Additionally, **\prevdepth** is set to  $0.3\baselineskip$ . The following TeX box may enlarge the space by further glue to adjust its *baseline*. Alternatively, see **/tcb/after skip** → P.92 which ignores the *baseline*.

```
\begin{tcolorbox}[after skip balanced=1cm,  
    colframe=red!50!white]  
    This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

Some text.


This is a **tcolorbox**.

Some text.

N 2020-09-25 **/tcb/beforeafter skip balanced=⟨glue⟩** (no default, initially  $0.5\baselineskip$  plus 2pt)

Inserts some vertical space of the given  $\langle glue \rangle$  before and after the colored box. This style sets **/tcb/before skip balanced** and **/tcb/after skip balanced**.

```
\newtcolorbox{doubleline}[1][] {  
    beforeafter skip balanced=0pt,  
    height=1.8\baselineskip,  
    enlarge top by=.1\baselineskip,  
    enlarge bottom by=.1\baselineskip,  
    colframe=blue!20,colback=blue!5,  
    size=small,valign=upper,#1 }  
  
\noindent\begin{tikzpicture}  
    \path[use as bounding box] (0,0)  
        rectangle (0.1,0.1);  
    \foreach \y in {0,1,...,9} {  
        \draw[very thin,red]  
            (-0.2,-\y*\baselineskip) --  
            (\linewidth+0.2cm,-\y*\baselineskip); }  
\end{tikzpicture}  
line 1\par  
\begin{doubleline} Abc \end{doubleline}  
\begin{doubleline} Def \end{doubleline}  
line 2g\par  
\begin{doubleline} Ghi \end{doubleline}  
line 3\par  
line 4 g
```

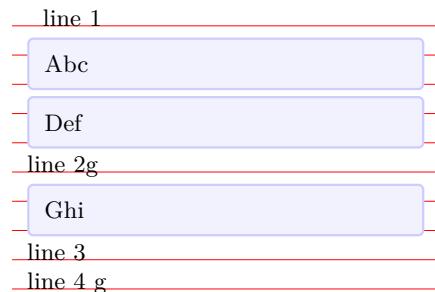

N 2020-09-25  
U 2015-03-16

**/tcb/before skip=<glue>** (style, no default)

Inserts some vertical space of the given *<glue>* before the colored box. This style sets /tcb/before<sup>→P.90</sup>. In contrast to /tcb/before skip balanced<sup>→P.91</sup>, this *<glue>* is relative to the lower edge of the preceding box and not to the baseline.

```
Some text.  
\begin{tcolorbox}[before skip=1cm,  
    colframe=red!50!white]  
    This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

Some text.

This is a tcolorbox.

N 2020-09-25  
U 2017-02-01

**/tcb/after skip=<glue>** (style, no default)

Inserts some vertical space of the given *<glue>* after the colored box. This style sets /tcb/after<sup>→P.90</sup>. In contrast to /tcb/after skip balanced<sup>→P.91</sup>, this *<glue>* is relative to the upper edge of the following box and not to the baseline.

```
\begin{tcolorbox}[after skip=1cm,  
    colframe=red!50!white]  
    This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
Some text.
```

This is a tcolorbox.

Some text.

N 2014-10-10

**/tcb/beforeafter skip=<glue>** (style, no default)

Inserts some vertical space of the given *<glue>* before and after the colored box. This style sets /tcb/before skip and /tcb/after skip.

```
\tcbset{beforeafter skip=0pt,  
    colframe=red!50!white}  
  
text before  
\begin{tcolorbox}  
    This is a \textbf{tcolorbox}.  
\end{tcolorbox}  
\begin{tcolorbox}  
    Second box.  
\end{tcolorbox}  
text after
```

text before

This is a tcolorbox.

Second box.

text after

N 2014-11-07

### /tcb/left skip=<length>

(style, no default, initially 0mm)

Inserts some horizontal space of the given <length> before the colored box. This style sets /tcb/grow to left by<sup>→ P.99</sup> with the negated <length>, i.e. the bounding box and box width are changed.

```
\noindent\rule{\linewidth}{2pt}\begin{tcolorbox}[left skip=1cm, colframe=red!50!white]This is a \textbf{tcolorbox}.\end{tcolorbox}
```

This is a **tcolorbox**.

N 2014-11-07

### /tcb/right skip=<length>

(style, no default, initially 0mm)

Inserts some horizontal space of the given <length> after the colored box. This style sets /tcb/grow to right by<sup>→ P.99</sup> with the negated <length>, i.e. the bounding box and box width are changed.

```
\noindent\rule{\linewidth}{2pt}\begin{tcolorbox}[right skip=1cm, colframe=red!50!white]This is a \textbf{tcolorbox}.\end{tcolorbox}
```

This is a **tcolorbox**.

N 2014-10-10

### /tcb/leftright skip=<length>

(style, no default)

Inserts some horizontal space of the given <length> before and after the colored box. This style changes the bounding box and the box width.

```
\noindent\rule{\linewidth}{2pt}\begin{tcolorbox}[leftright skip=1cm, colframe=red!50!white]This is a \textbf{tcolorbox}.\end{tcolorbox}
```

This is a **tcolorbox**.

U 2017-02-01

## /tcb/parskip

(style, no value)

This options is considered to be superseded by /tcb/before skip balanced<sup>→ P. 91</sup> and /tcb/after skip balanced<sup>→ P. 91</sup> (see note on page 90).

Sets the keys **before** and **after** to values which are recommended, if the package **parskip**<sup>→ CTAN</sup> is used and there is no better idea for **before** and **after**. This is similar to:

```
\tcbset{parskip/.style={before={\par\pagebreak[0]\parindent=0pt},  
after={\par}}}
```

U 2017-02-01

## /tcb/noparskip

(style, no value)

This options is considered to be superseded by /tcb/before skip balanced<sup>→ P. 91</sup> and /tcb/after skip balanced<sup>→ P. 91</sup> (see note on page 90).

Sets the keys **before** and **after** to values which are recommended, if the package **parskip**<sup>→ CTAN</sup> is *not* used and there is no better idea for **before** and **after**. This is similar to:

```
\tcbset{noparskip/.style={before={\par\pagebreak[0]\smallskip\parindent=0pt},  
after={\par\smallskip}}}
```

## /tcb/autoparskip

(style, no value)

This options is considered to be superseded by /tcb/before skip balanced<sup>→ P. 91</sup> and /tcb/after skip balanced<sup>→ P. 91</sup> (see note on page 90).

Tries to detect the usage of the package **parskip**<sup>→ CTAN</sup> and sets the keys **before** and **after** accordingly. Actually, the following is done:

- If the length of \parskip is greater than 0pt at the beginning of the document, /tcb/parskip is executed. Here, the usage of package **parskip**<sup>→ CTAN</sup> is *assumed*.
- Otherwise, if the length of \parskip is not greater than 0pt at the beginning of the document, /tcb/noparskip is executed. Here, the absence of package **parskip**<sup>→ CTAN</sup> is *assumed*.

`/tcb/baseline=<length>`

(no default, initially `0pt`)

Used to set the `\pgfsetbaseline` value of the resulting `tcolorbox`.

```
\tcbs{colframe=red!50!white,width=4cm,nobeforeafter}
Some text\dotfill
\begin{tcolorbox}[baseline=3mm]
One line.
\end{tcolorbox}
\begin{tcolorbox}[baseline=3mm]
First line.\Second line.
\end{tcolorbox}
```

Some text.....

One line.

First line.  
Second line.

N 2014-10-10

`/tcb/box align=<alignment>`

(style, no default, initially `bottom`)

Used to set the `/tcb/baseline` value of the resulting `tcolorbox`. Feasible values for `<alignment>` are:

- `bottom`: alignment with the box bottom,
- `top`: alignment with the box top,
- `center`: alignment with the box center,
- `base`: alignment with the box content base. This option is not applicable for a `tcolorbox`<sup>P. 12</sup> but for a `\tcbox`<sup>P. 14</sup> only. It is an alias for `/tcb/tcbox raise base`<sup>P. 112</sup>.

```
\tcbs{colframe=red!50!white,width=4cm,nobeforeafter}
Some text\dotfill
\begin{tcolorbox}[box align=bottom]
One line.
\end{tcolorbox}
\begin{tcolorbox}[box align=bottom]
First line.\Second line.
\end{tcolorbox}
```

Some text.....

One line.

First line.  
Second line.

```
\tcbs{colframe=red!50!white,width=4cm,nobeforeafter}
Some text\dotfill
\begin{tcolorbox}[box align=top]
One line.
\end{tcolorbox}
\begin{tcolorbox}[box align=top]
First line.\Second line.
\end{tcolorbox}
```

Some text.....

One line.

First line.  
Second line.

```
\tcbset{colframe=red!50!white,width=4cm,nobeforeafter}
Some text\dotfill
\begin{tcolorbox}[box align=center]
One line.
\end{tcolorbox}
\begin{tcolorbox}[box align=center]
First line.\Second line.
\end{tcolorbox}
```

Some text.....

One line.

First line.  
Second line.

```
\tcbset{colframe=red!50!white,nobeforeafter}
Some text\dotfill
\tcbox[nobeforeafter,box align=base]{One line}
\tcbox[nobeforeafter,box align=base,size=fbox]{Another line}
```

Some text .....

One line

Another line

**N 2014-12-11 /tcb/ignore nobreak=true|false** (default true, initially false)

After a heading, L<sup>A</sup>T<sub>E</sub>X tries to avoid a break by setting a `nobreak` boolean value. Starting from version 3.33, the `/tcb/before`<sup>P.90</sup> respectively `/tcb/before skip`<sup>P.92</sup> settings are not used after a heading if `/tcb/ignore nobreak` is set to `false`. For an unbreakable box, `/tcb/before nobreak` is used instead. Further, a `/tcb/breakable`<sup>P.408</sup> box will also try to avoid a break between a heading and a directly following first part of a break sequence. Set `/tcb/ignore nobreak` to `true`, if `nobreak` should be ignored as prior to version 3.33. Also, such a setting may be used locally to enforce the `/tcb/before`<sup>P.90</sup> setting.

**N 2014-12-16 /tcb/before nobreak=(code)** (no default, initially \noindent)

Sets the `(code)` which is executed before the colored box if it is unbreakable, if `/tcb/ignore nobreak` is not set, and if the box follows a heading.

**N 2017-02-23 /tcb/parfillskip restore=true|false** (default true, initially true)

If this option is set to be `true`, the minimum value of `\parfillskip` is tested at specific spots, if it is greater than 0pt. If so, `\parfillskip` is restored to `\@flushglue` which happens to be the default value.

These tests are executed for `/tcb/parskip`<sup>P.94</sup>, `/tcb/noparskip`<sup>P.94</sup>, `/tcb/after skip`<sup>P.92</sup>, `/tcb/breakable`<sup>P.408</sup>, and `tcraster`<sup>P.313</sup>.

This option was created to automatically avoid overfull box warnings with `\parfillskip` changing packages.

## 4.15 Bounding Box

Normally, every `tcolorbox` has a bounding box which fits exactly to the dimensions of the outer frame. Therefore, L<sup>A</sup>T<sub>E</sub>X reserves exactly the space needed for the box. This behavior can be changed by enlarging (or shrinking) the bounding box. If the bounding box is enlarged, the `tcolorbox` will get some clearance around it. If the bounding box is shrunk, i. e. enlarged with negative values, the `tcolorbox` will overlap to other parts of the page. For example, the `tcolorbox` could be stretched into the page margin.



The following examples use `/tcb/show bounding box`<sup>→ P. 205</sup> to display the actual bounding box. For this, the library LB `skins` has to be included and `/tcb/enhanced`<sup>→ P. 235</sup> has to be set.

### 4.15.1 Shifting Bounding Box Borders

`/tcb/enlarge top initially by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the top of the box by `<length>`. If the box is *breakable*, only the first box of the break sequence gets enlarged. `/tcb/enlarge top by`<sup>→ P. 98</sup> overwrites this key.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[enlarge top initially by=-5mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[enlarge top initially by=5mm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a `tcolorbox`.

This is a `tcolorbox`.

`/tcb/enlarge bottom finally by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the bottom of the box by `<length>`. If the box is *breakable*, only the last box of the break sequence gets enlarged. `/tcb/enlarge bottom by`<sup>→ P. 98</sup> overwrites this key.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[enlarge bottom finally by=5mm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[enlarge bottom finally by=-5mm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a `tcolorbox`.

This is a `tcolorbox`.

`/tcb/enlarge top at break by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the top of the box by `<length>`, if the box is `/tcb/breakable`<sup>→ P. 408</sup>. In this case, it is applied to *middle* and *last* parts in a break sequence. `/tcb/enlarge top by` overwrites this key.

`/tcb/enlarge bottom at break by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the bottom of the box by `<length>`, if the box is `/tcb/breakable`<sup>→ P. 408</sup>. In this case, it is applied to *first* and *middle* parts in a break sequence. `/tcb/enlarge bottom by` overwrites this key.

`/tcb/enlarge top by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the top of the box by `<length>`. `/tcb/enlarge top initially by`<sup>→ P. 97</sup> and `/tcb/enlarge top at break by` are set to `<length>`.

`/tcb/enlarge bottom by=<length>` (no default, initially 0mm)


Enlarges the bounding box distance to the bottom of the box by `<length>`. `/tcb/enlarge bottom finally by`<sup>→ P. 97</sup> and `/tcb/enlarge bottom at break by` are set to `<length>`.

`/tcb/enlarge left by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the left side of the box by `<length>`.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[enlarge left by=2cm,width=5cm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[enlarge left by=-2cm,width=\ linewidth+2cm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```




This is a **tcolorbox**.

`/tcb/enlarge right by=<length>` (no default, initially 0mm)

Enlarges the bounding box distance to the right side of the box by `<length>`.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[enlarge right by=-2cm,width=\ linewidth+2cm,
    enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[enlarge right by=2cm,width=\ linewidth-2cm]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```



This is a **tcolorbox**.


`/tcb/enlarge by=<length>`

(no default, initially 0mm)

Enlarges the bounding box distance to all sides of the box by `<length>`.

```
\tcbset{colframe=blue!75!black,colback=white,width=5cm,nobeforeafter}

\begin{tcolorbox}
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[enlarge by=5mm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

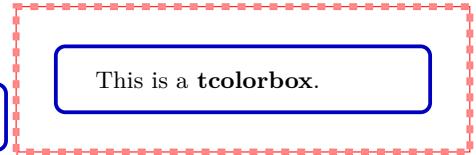

`/tcb/grow to left by=<length>`

(no default, initially 0mm)

Enlarges the current box width by `<length>` and enlarges (shrinks) the bounding box distance to the left side of the box by  $-\langle length \rangle$ . Also see `/tcb/left skip`<sup>P. 93</sup>.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[width=5cm,grow to left by=2cm,enhanced,show bounding box]
This is a \textbf{tcolorbox} with a width of 7cm.
\end{tcolorbox}
```

This is a `tcolorbox` with a width of 7cm.

`/tcb/grow to right by=<length>`

(no default, initially 0mm)

Enlarges the current box width by `<length>` and enlarges (shrinks) the bounding box distance to the right side of the box by  $-\langle length \rangle$ . Also see `/tcb/right skip`<sup>P. 93</sup>.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[grow to right by=2cm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}

\bigskip

\begin{tcolorbox}[grow to right by=2cm,grow to left by=1cm,
enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a `tcolorbox`.

This is a `tcolorbox`.

N 2018-03-22

/tcb/grow sideways by=<length>

(no default, initially 0mm)

Shortcut for setting /tcb/grow to left by<sup>→ P.99</sup> and /tcb/grow to right by<sup>→ P.99</sup> to <length>. Also see /tcb/oversize<sup>→ P.52</sup> and /tcb/spread sideways<sup>→ P.103</sup>.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[grow sideways by=2cm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a tcolorbox.

#### 4.15.2 Box Alignment

N 2015-11-20

/tcb/flush left

(style, no value)

Enlarges the bounding box to the right side to fill the line completely.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[flush left,width=5cm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a tcolorbox.

N 2015-11-20

/tcb/flush right

(style, no value)

Enlarges the bounding box to the left side to fill the line completely.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[flush right,width=5cm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a tcolorbox.

N 2015-11-20

/tcb/center

(style, no value)

Enlarges the bounding box equally to both sides to fill the line completely.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[center,width=5cm,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a tcolorbox.

### Floating box from toggle enlargement

This page is an odd page. Therefore, the left and right enlargements are not toggled. This box stretches to the right margin on odd pages and to the left margin on even pages. The current document is one-sided – this feature makes sense for two-sided documents only.

#### 4.15.3 Toggle Enlargements

**U** 2015-11-13 **/tcb/toggle enlargement=<toggle preset>** (default `evenpage`, initially `none`)

According to the `<toggle preset>`, the left and the right enlargements of the bounding box are switched or not. Feasible values are:

- `none`: no switching.
- `forced`: the values of the left and right enlargement are switched.
- `evenpage`: if the page is an even page, the values of the left and right enlargement are switched. This value also sets `/tcb/check odd page`<sup>P.118</sup> to `true`.



See `/tcb/toggle left and right`<sup>P.53</sup> to toggle geometry settings.

```
\tcbset{colframe=blue!75!black,colback=white,
grow to left by=20mm,grow to right by=-5mm}

\begin{tcolorbox}[toggle enlargement=none,enhanced,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[toggle enlargement=forced]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[toggle enlargement=evenpage]
This page is an \tcbifoddpage{odd}{even} page.
Therefore, the left and right enlargements
\tcbifoddpage{are not}{are} toggled.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is a **tcolorbox**.

This page is an odd page. Therefore, the left and right enlargements are not toggled.

```
\begin{tcolorbox}[colframe=red!60!black,colback=red!15!white,
fonttitle=\bfseries,title=Floating box from \texttt{toggle enlargement},
width=\textwidth,grow to right by=2cm,toggle enlargement,float=t]
This page is an \tcbifoddpage{odd}{even} page.
Therefore, the left and right enlargements \tcbifoddpage{are not}{are} toggled.
This box stretches to the right margin on odd pages and to the left
margin on even pages. The current document is one-sided -- this feature makes
sense for two-sided documents only.
\end{tcolorbox}
```

#### 4.15.4 Spread Box to Page Borders



The following border options are *not* applicable to nested boxes, boxes inside tables, etc. For boxes inside lists, the options *may* work, but not necessarily. Also, boxes should be set with `\noindent` and full width.

N 2017-02-13

`/tcb/spread inwards=<length>` (default 0pt, initially unset)

Enlarges the current box width to match the inner page border (left-handed side for one-sided documents). If the optional `<length>` is greater than 0pt, the box grows over the border, if `<length>` is lower than 0pt, there is a margin between box and page border. `/tcb/toggle enlargement`<sup>→ P. 101</sup> is set automatically.

```
\begin{tcolorbox}[enhanced,spread inwards,
  colframe=blue!75!black,colback=white,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

N 2017-02-13

`/tcb/spread outwards=<length>` (default 0pt, initially unset)

Enlarges the current box width to match the outer page border (right-handed side for one-sided documents). If the optional `<length>` is greater than 0pt, the box grows over the border, if `<length>` is lower than 0pt, there is a margin between box and page border. `/tcb/toggle enlargement`<sup>→ P. 101</sup> is set automatically.

```
\begin{tcolorbox}[enhanced,spread outwards,
  colframe=blue!75!black,colback=white,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

N 2017-02-13

`/tcb/move upwards=<length>` (default 0pt, initially unset)

Starts a new page with the box at the very top page border. If the optional `<length>` is greater than 0pt, the box moves over the border, if `<length>` is lower than 0pt, there is a margin between box and page border.

N 2017-02-13

`/tcb/move upwards*=<length>` (default 0pt, initially unset)

Identical to `/tcb/move upwards`, but without starting a new page.

N 2017-02-13

`/tcb/fill downwards=<length>` (default 0pt, initially unset)

Enlarges the height of the box until the very bottom page border. The library `breakable` has to be loaded, and `/tcb/height fill`<sup>→ P. 63</sup> is set automatically. If the optional `<length>` is greater than 0pt, the box moves over the border, if `<length>` is lower than 0pt, there is a margin between box and page border.

```
\begin{tcolorbox}[enhanced,fill downwards,
  colframe=blue!75!black,colback=white,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is an example for “spread upwards”.

N 2017-02-13 **/tcb/spread upwards=(*length*)**

(default `Opt`, initially unset)

Combination of `/tcb/move upwards`<sup>P. 102</sup>, `/tcb/spread inwards`<sup>P. 102</sup>, and `/tcb/spread outwards`<sup>P. 102</sup>. The optional `<length>` is used for all these keys.

```
\begin{tcolorbox}[enhanced,spread upwards,sharp corners=north,height=3cm,
  colframe=blue!75!black,interior style={top color=blue!50,bottom color=white}]
This is an example for \enquote{spread upwards}.
\end{tcolorbox}
```

N 2017-02-13 **/tcb/spread upwards\*=(*length*)**

(default `Opt`, initially unset)

Identical to `/tcb/move upwards`<sup>P. 102</sup>, but without starting a new page.

N 2017-02-13 **/tcb/spread sideways=(*length*)**

(default `Opt`, initially unset)

Combination of `/tcb/spread inwards`<sup>P. 102</sup> and `/tcb/spread outwards`<sup>P. 102</sup>. The optional `<length>` is used for all these keys. Also see `/tcb/oversize`<sup>P. 52</sup> and `/tcb/grow sideways by`<sup>P. 100</sup>.

```
\begin{tcolorbox}[enhanced,spread sideways,
  colframe=blue!75!black,colback=white,show bounding box]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

This is a **tcolorbox**.

N 2017-02-13 **/tcb/spread=(*length*)**

(default `Opt`, initially unset)

Combination of `/tcb/move upwards`<sup>P. 102</sup>, `/tcb/fill downwards`<sup>P. 102</sup>, `/tcb/spread inwards`<sup>P. 102</sup>, and `/tcb/spread outwards`<sup>P. 102</sup>. Such, the box fills the whole page. The optional `<length>` is used for all these keys.

N 2017-02-13 **/tcb/spread downwards=(*length*)**

(default `Opt`, initially unset)

Combination of `/tcb/fill downwards`<sup>P. 102</sup>, `/tcb/spread inwards`<sup>P. 102</sup>, and `/tcb/spread outwards`<sup>P. 102</sup>. The optional `<length>` is used for all these keys.

```
\begin{tcolorbox}[enhanced,spread downwards,sharp corners=south,
  colframe=red!75!black,interior style={top color=white,bottom color=red!50}]
This is an example for \enquote{spread downwards}.
\end{tcolorbox}
```

This is an example for “spread downwards”.

#### 4.15.5 Box Extrusion



The following keys should not be used with breakable boxes.

##### /tcb/shrink tight

(style, no value, initially unset)

The total colored box is shrunk to the dimensions of the upper part. There should be no lower part and no title. This style sets the /tcb/boxsep<sup>→P. 46</sup> to 0pt and other geometry keys to fitting values. This option is likely to be used with the following extrusion keys.

```
\tcbset{colframe=blue!75!black,colback=white,arc=0mm,boxrule=0.4pt,  
nobeforeafter,tcbox raise base,shrink tight}
```

```
\begin{tcolorbox}  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

  Lorem \tcbbox{ipsum} dolor sit amet, consectetuer adipiscing elit.

This is a tcolorbox.

  Lorem ipsum dolor sit amet, consectetuer adipiscing elit.

##### U 2014-09-19 /tcb/extrude left by=<length>

(style, no default, initially unset)

The colored box is extruded by the given <length> to the left side. The inner width and the bounding box is kept unchanged and the operation is additive!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,  
frame style={opacity=0.25},interior style={opacity=0.5},  
nobeforeafter,tcbox raise base,shrink tight,extrude by=2mm}
```

```
  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit,  
vestibulum ut, placerat ac, adipiscing vitae, felis.  
  \tcbbox[extrude left by=1cm]{Curabitur} dictum gravida mauris.  
  Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna.
```

  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna.

##### U 2014-09-19 /tcb/extrude right by=<length>

(style, no default, initially unset)

The colored box is extruded by the given <length> to the right side. The inner width and the bounding box is kept unchanged and the operation is additive!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,  
frame style={opacity=0.25},interior style={opacity=0.5},  
nobeforeafter,tcbox raise base,shrink tight,extrude by=2mm}
```

```
  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit,  
vestibulum ut, placerat ac, adipiscing vitae, felis.  
  \tcbbox[extrude right by=1cm]{Curabitur} dictum gravida mauris.  
  Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna.
```

  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna.

### /tcb/extrude top by=<length>

(style, no default, initially unset)

The colored box is extruded by the given <length> to the top side. The inner width and the bounding box is kept unchanged and the operation is additive!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,  
frame style={opacity=0.25},interior style={opacity=0.5},  
nobeforeafter,tcbox raise base,shrink tight,extrude by=2mm}
```

  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit,  
  vestibulum ut, placerat ac, adipiscing vitae, felis.  
  \tcbox[extrude top by=1cm]{Curabitur} dictum gravida mauris.  
  Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna.

  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat  
  ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget,  
  consectetuer id, vulputate a, magna.

### /tcb/extrude bottom by=<length>

(style, no default, initially unset)

The colored box is extruded by the given <length> to the bottom side. The inner width and the bounding box is kept unchanged and the operation is additive!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,  
frame style={opacity=0.25},interior style={opacity=0.5},  
nobeforeafter,tcbox raise base,shrink tight,extrude by=2mm}
```

  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit,  
  vestibulum ut, placerat ac, adipiscing vitae, felis.  
  \tcbox[extrude bottom by=1cm]{Curabitur} dictum gravida mauris.  
  Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna.

  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat  
  ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget,  
  consectetuer id, vulputate a, magna.

### /tcb/extrude by=<length>

(style, no default, initially unset)

The colored box is extruded by the given <length> to all sides. The inner width and the bounding box is kept unchanged and the operation is additive!

```
\tcbset{enhanced,colframe=red,colback=yellow!25!white,  
frame style={opacity=0.25},interior style={opacity=0.5},  
nobeforeafter,tcbox raise base,shrink tight,extrude by=2mm}
```

  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit,  
  vestibulum ut, placerat ac, adipiscing vitae, felis. \tcbox[Curabitur] dictum  
  gravida mauris. \tcbox[colframe=Green,interior style={opacity=0.0}]{Nam}  
  arcu libero, nonummy eget, consectetuer id, \tcbox[vulputate] a, magna. Donec  
  vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus  
  et malesuada fames ac turpis egestas. \tcbox[Mauris ut leo.]

  Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat  
  ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget,  
  consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi  
  tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo.

## 4.16 Layered Boxes and Every Box Settings

A `tcolorbox` may contain another `tcolorbox` and so on. The package takes track of the nesting level using a counter `tcblayer`. Counter values may be used for doing some fancy things, but you should never change the counter value yourself.

The package takes special care for the first four layers or nesting levels, called managed layers. Here, footnote texts are administrated to find their intended place and specific layer dependent options may be set by changing `/tcb/every box on layer n→ P. 107`. If needed, the number of managed layers can be increased by setting `\tcbsetmanagedlayers→ P. 107` to a higher value than 4.

The following styles have a considerable influence on how layered boxes are processed. Note especially that nested boxes are getting a `/tcb/reset→ P. 123` by default. You can change this, but be prepared for surprises if you do.

If the defaults are *not changed*, a `tcolorbox` gets its options in the following order. Following options overwrite preceding options.

1. On package load, all options are set to default values.
2. Every `\tcbset→ P. 13` command adds or changes options for the following boxes inside the current TeX group.
3. While entering a `tcolorbox`, a `/tcb/every box on layer n→ P. 107` or `/tcb/every box on higher layers→ P. 107` option list is applied. With default settings this means:
  - For layer 1 (lowest layer), the `/tcb/every box` option list is applied. Not overwritten options given by a preceding `\tcbset→ P. 13` survive.
  - For layer 2 and above (nested boxes), a `/tcb/reset→ P. 123` followed by `/tcb/every box` option list is applied. Every resettable options given by a preceding `\tcbset→ P. 13` and by the surrounding box(es) are reset.
4. The `<options>` given to the `tcolorbox` are applied. Or, if the box was generated by `\newtcolorbox→ P. 16` or friends, the `<options>` given there are applied.
5. If the box was generated by `\newtcolorbox→ P. 16` or friends, some automated options are applied.

### `/tcb/every box`

(style)

By default, this style is empty.

```
% default setting:  
\tcbset{every box/.style={}}
```

It may be changed by redefining this style.

```
% setting all boxes to be enhanced:  
\tcbset{every box/.style={enhanced}}
```

The alternative for setting something for every box (on every layer) is `\tcbsetforeverylayer→ P. 13`:

```
% setting all boxes to be enhanced:  
\tcbsetforeverylayer{enhanced}
```



## /tcb/every box on layer n (style)

Here, n has to be replaced by a number ranging from 1 to the highest managed layer number (4 by default).

```
% default settings:  
\tcbset{  
    every box on layer 1/.style={every box},  
    every box on layer 2/.style={reset,every box},  
    every box on layer 3/.style={reset,every box},  
    every box on layer 4/.style={reset,every box},  
}
```

## /tcb/every box on higher layers (style)

Higher layers are layers above the highest managed layer number (4 by default).

```
% default setting:  
\tcbset{every box on higher layers/.style={reset,every box}}
```

## \tcbsetmanagedlayers{\langle number\rangle}

Replaces the highest managed layer number by  $\langle number \rangle$  where 4 is the default. This macro can only be used inside the preamble. Using a  $\langle number \rangle$  lower than 4 typically makes no sense, but is not forbidden.

```
% \usepackage{lipsum} \tcbuselibrary{skins,breakable}  
\tcbset{colframe=red!75!black,fonttitle=\bfseries,  
colback=red!5!white,  
every box/.style={enhanced,watermark text=\thetcblayer,  
before=\par\smallskip,after=\par\smallskip},  
every box on layer 2/.append style={colback=yellow!10!white,drop fuzzy shadow}}  
\begin{tcolorbox}[enhanced jigsaw,breakable,title=Layer 1 Box]  
Here comes a footnote\footnote{Footnote from layer 1 box}.  
\lipsum[2]  
\begin{tcolorbox}[title=Layer 2 Box]  
abc\footnote{The footnote of abc}  
\end{tcolorbox}  
\begin{tcolorbox}[title=Another Box,ams equation]  
 \tcbhighmath{\sum\limits_{n=1}^{\infty} \frac{1}{n}} = \infty.  
\end{tcolorbox}  
Some text\footnote{Footnote from some text}.  
\begin{tcolorbox}[title=Yet Another Box]  
 \tcboxfit[height=2cm]{\lipsum[1]}  
My text.  
\begin{tcolorbox}  
 Another lipsum text\footnote{A lipsum text}. \lipsum[3]  
\begin{tcolorbox}[title=Layer 4,colframe=blue,colback=white]  
 Layer 4\footnote{Layer 4 footnote}  
\end{tcolorbox}  
The End\footnote{Last footnote}.  
\end{tcolorbox}  
\end{tcolorbox}  
\end{tcolorbox}
```

### Layer 1 Box

Here comes a footnote<sup>a</sup>. Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae

ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

## Layer 2 Box

abc<sup>a</sup>

<sup>a</sup>The footnote of abc

2

## Another Box

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$

(1)

Some text<sup>b</sup>.

## Yet Another Box

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

My text.

Another ipsum text<sup>a</sup>. Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

## Layer 4

Layer 4<sup>a</sup>

<sup>a</sup>Layer 4 footnote

4

The End<sup>b</sup>.

<sup>a</sup>A ipsum text

<sup>b</sup>Last footnote

<sup>a</sup>Footnote from layer 1 box

<sup>b</sup>Footnote from some text

## 4.17 Capture Mode

`/tcb/capture=<mode>` (no default, initially `minipage`)

The capture `<mode>` defines how the box content is processed.

Feasible values for `<mode>` are:

- `minipage`:

This is the default `<mode>` for `tcolorbox`<sup>→ P. 12</sup>. The content may have an upper and a lower part. Optionally, the box can be `/tcb/breakable`<sup>→ P. 408</sup>. The box content is put into a minipage or into something similar to a minipage.

- `hbox`:

This is the default `<mode>` for `\tcbbox`<sup>→ P. 14</sup>. The content cannot have a lower part and cannot be broken. The colored box is sized according to the dimensions of the content. A shortcut to set this mode is `/tcb/hbox`.

- `fitbox`: (needs the `fitting` library)

This is the default `<mode>` for `\tcboxfit`<sup>→ P. 457</sup>. The content cannot have a lower part and cannot be broken. The content is sized according to the dimensions of the colored box. A shortcut to set this mode is `/tcb/fit`<sup>→ P. 462</sup>.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[capture=minipage]
This is a tcolorbox.
\end{tcolorbox}

\begin{tcolorbox}[capture=hbox]
This is a tcolorbox.
\end{tcolorbox}

\begin{tcolorbox}[capture=fitbox,height=9mm] % needs the `fitting' library
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

This is a tcolorbox.

This is a tcolorbox.

`/tcb/hbox`

(style, no default)

Shortcut for `capture=hbox`.

```
\tcbset{colframe=blue!75!black,colback=white}

\begin{tcolorbox}[hbox]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/minipage`

(style, no default)

Shortcut for `capture=minipage`.

## 4.18 Text Characteristics

U 2024-01-10

/tcb/parbox=true|false

(default true, initially true)

The text inside a `tcolorbox` is formatted using a `LATEX minipage` if the box is unbreakable. If breakable, the box tries a mimicry of a `minipage`. In a `minipage` or `parbox`, paragraphs are formatted slightly different as the main text. If the key value is set to `false`, the normal main text behavior is restored. In some situations, this has some unwanted side effects. It is recommended that you use this **experimental setting** only where you really want to have this feature.

```
% \usepackage{lipsum} % preamble
\tcbset{width=(\linewidth-2mm)/2,nobeforeafter,arc=1mm,
colframe=blue!75!black,colback=white,fonttitle=\bfseries,fontupper=\small,
left=2mm,right=2mm,top=1mm,bottom=1mm,equal height group=parbox}

\begin{tcolorbox}[parbox,adjusted title={parbox=true (normal)}]
\lipsum[1-2]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[parbox=false,adjusted title={parbox=false}]
\lipsum[1-2]
\end{tcolorbox}%
```

### parbox=true (normal)

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### parbox=false

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/hyphenationfix=true|false` (default `true`, initially `false`)

Long words at the beginning of paragraphs in very narrow boxes will not be hyphenated using pdflatex. This problem is circumvented by applying the `hyphenationfix` option.

```
\tcbset{colframe=blue!75!black,  
        fontupper=\normalsize,  
        colback=blue!5!white, width=4cm}  
  
\begin{tcolorbox}  
Rechnungsadjunktentochter.\par  
Statthaltereikonzipist.  
\end{tcolorbox}  
  
\begin{tcolorbox}[hyphenationfix]  
Rechnungsadjunktentochter.\par  
Statthaltereikonzipist.  
\end{tcolorbox}
```

Rechnungsadjunktentochter.  
Statthaltereikonzipist.

Rechnungsad-  
junktentochter.  
Statthal-  
tereikonzipist.



`parbox=false` and `hyphenationfix` should not be used together. They are targeting different box types and they do not blend very well.

## 4.19 Files

`/tcb/tempfile=<file name>` (no default, initially `\jobname.tcbtemp`)

Sets `<file name>` as name for the temporary file which is used inside `tcbwritetemp`<sup>P. 148</sup> and `\tcbusetemp`<sup>P. 148</sup> implicitly.

## 4.20 \tcbbox Specials

The following options are applicable for `\tcbbox→ P. 14` and `\tcbboxmath→ P. 382` only.

`/tcb/tcbox raise=<length>` (no default, initially 0pt)

Raises the `\tcbbox→ P. 14` by the given `<length>`.

```
\tcbset{colframe=blue!50!black,colback=white,colupper=red!50!black,
        fonttitle=\bfseries,nobeforeafter,center title}

Test\dotfill
\tcbox[tcbbox raise base]{Hello World 1}\dotfill
\tcbox{Hello World 2}\dotfill
\tcbox[tcbbox raise=5mm]{Hello World 3}
```

Test ..... Hello World 1 ..... Hello World 2 ..... Hello World 3

`/tcb/tcbox raise base` (style, no value, initially unset)

Raises the `\tcbbox→ P. 14` such that the base of its content matches the base of the environmental line; see example above.

`/tcb/on line` (style, no value, initially unset)

Combines `/tcb/tcbox raise base` with `/tcb/nobeforeafter→ P. 90`. The resulting box behaves analogue to `\fbox`.

`/tcb/verbatim` (style, no value)

Sets options for a *verbatim* style `\tcbbox→ P. 14`. Since the indented boxes may contain only very few words, the dimensions are made smaller and `/tcb/nobeforeafter→ P. 90` and `/tcb/tcbox raise base` are set.

```
\DeclareTotalTCBox{\myverb}{ v }{verbatim,
    colframe=red!75!black,colupper=blue}{#1}
\myverb{\textbf} is a \myverb{\LaTeX} command.
```

`\textbf` is a `\LaTeX` command.


`/tcb/tcbox width=<mode>` (no default, initially `auto`)

Controls how `\tcbox`<sup>P.14</sup> respects a `/tcb/width`<sup>P.41</sup> setting. Feasible values for `<mode>` are:

- **auto** (initial setting): ignore `/tcb/width`<sup>P.41</sup> and set box width according to its content.
- **auto limited**: Set box width according to its content, if it is smaller than `/tcb/width`<sup>P.41</sup>. Otherwise, the content is set like in a `tcolorbox`<sup>P.12</sup> with line breaks.
- **forced center**: Set box width according to `/tcb/width`<sup>P.41</sup>. The content is centered and may overlap the box borders.
- **forced left**: Set box width according to `/tcb/width`<sup>P.41</sup>. The content is left aligned and may overlap the box borders.
- **forced right**: Set box width according to `/tcb/width`<sup>P.41</sup>. The content is right aligned and may overlap the box borders.
- **minimum center**: Set box width according to `/tcb/width`<sup>P.41</sup>, if the content fits into. The content is centered and the box width may grow beyond `/tcb/width`<sup>P.41</sup>.
- **minimum left**: Set box width according to `/tcb/width`<sup>P.41</sup>, if the content fits into. The content is left aligned and the box width may grow beyond `/tcb/width`<sup>P.41</sup>.
- **minimum right**: Set box width according to `/tcb/width`<sup>P.41</sup>, if the content fits into. The content is right aligned and the box width may grow beyond `/tcb/width`<sup>P.41</sup>.

```
\tcbset{size=small,on line,before upper=\strut,
colframe=blue!75!black,colback=blue!5!white,
fontupper=\normalsize,width=4cm}

\tcbox[tcbox width=auto]{auto}\qquad
\tcbox[tcbox width=auto limited]{auto limited}\qquad
\tcbox[tcbox width=auto limited]{auto limited with long text} \\
\tcbox[tcbox width=forced center]{forced center}\qquad
\tcbox[tcbox width=forced center]{forced center with long text} \\
\tcbox[tcbox width=forced left]{forced left}\qquad
\tcbox[tcbox width=forced left]{forced left with long text} \\
\tcbox[tcbox width=forced right]{forced right}\qquad
\tcbox[tcbox width=forced right]{forced right with long text} \\
\tcbox[tcbox width=minimum center]{minimum center}\qquad
\tcbox[tcbox width=minimum center]{minimum center with long text} \\
\tcbox[tcbox width=minimum left]{minimum left}\qquad
\tcbox[tcbox width=minimum left]{minimum left with long text} \\
\tcbox[tcbox width=minimum right]{minimum right}\qquad
\tcbox[tcbox width=minimum right]{minimum right with long text}
```

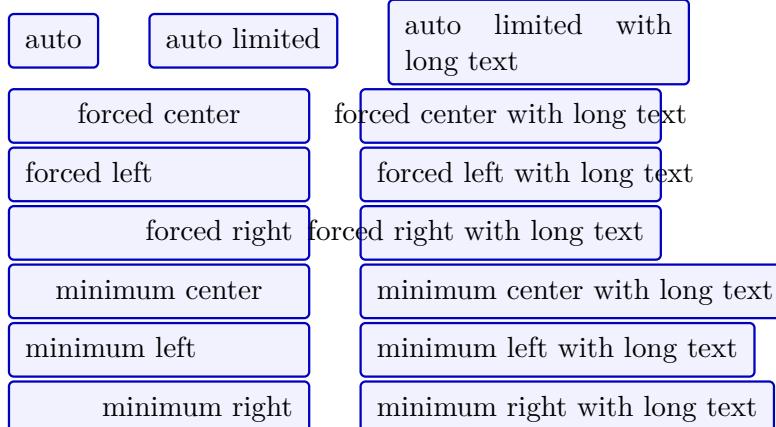

## 4.21 Counters, Labels, and References

`/tcb/phantom=<code>`

(no default, initially unset)

The `<code>` is put in a box at the upper left corner of the `tcolorbox`. If the `tcolorbox` is breakable, the `<code>` is executed for the first box of the break sequence only. If there already was some phantom code given, the new `<code>` is appended.

The `<code>` is intended to be used for counter stepping, labelling, and related operations which do not produce visible text.

- The `<code>` is executed before the title and box content, i. e. counter values are ensured to be increased before usage.
- Labels are ensured to reference the correct page number.
- The `<code>` is executed only once even during fitting operations for title and box content.
- In combination with the `hyperref`<sup>→ CTAN</sup> package, the hyper anchor is set to the upper left corner of the `tcolorbox`, i. e. links inside the pdf document will jump to the box pleasantly.
- Since the `<code>` is executed inside a `TEX` group, only global operations can survive this group.

Examples for the `phantom` usage are given in Section 17.11 from page 373, e. g. Example 17.1 on page 374.

`/tcb/nophantom`

(no value, initially set)

Removes the phantom code if set before.

N 2023-02-08

`/tcb/label is label`

(no value, initially set)

Sets `\label` as labelling for `tcolorbox` (global or per box). When `/tcb/label` and friends are used, the underlying labeling macro is `\label`. References can be made by `\ref`, `\pageref`, and similar macros. This is the default `LATEX` behaviour. Note that this option is not getting reset by `/tcb/reset`<sup>→ P. 123</sup>.

N 2023-02-08

`/tcb/label is zlabel`

(no value, initially unset)

Sets `\zlabel` as labelling for `tcolorbox` (global or per box). When `/tcb/label` and friends are used, the underlying labeling macro is `\zlabel`. This needs the `zref`<sup>→ CTAN</sup> package [12] or packages building upon `zref`<sup>→ CTAN</sup> to be loaded. References can be made by `\zref`. If the `zref-clever`<sup>→ CTAN</sup> package [2] is loaded, `\zcref`, `\zcpageref`, and similar macros can be applied. Note that this option is not getting reset by `/tcb/reset`<sup>→ P. 123</sup>.



Recent versions of `zref-clever`<sup>→ CTAN</sup> hook into the common `\label` and not need setting `\zlabel` explicitly. `/tcb/label is zlabel` can be omitted and applied only for optimization (for experts).

U 2023-02-08

`/tcb/label=<marker>`

(no default, initially unset)

The `<marker>` is set as label text with `\label` for a reference with the `\ref` macro, if `/tcb/label is label` is active, or as label text with `\zlabel` for a reference with the `\zref` macro and similar, if `/tcb/label is zlabel` is active. Typically, this option is used for numbered boxes, see Subsection 5.1 from page 128, e. g. `/tcb/new/auto counter`<sup>→ P. 128</sup>.

N 2014-11-28

`/tcb/phantomlabel=<marker>`

(no default, initially unset)

Equivalent to `/tcb/label` for an *unnumbered* box. A `\phantomsection` from the package `hyperref`<sup>→ CTAN</sup> [16] is used to set a correct hyperlink target. This is not needed and should typically not be used for a numbered box.

`/tcb/step=<counter>` (no default, initially unset)

Shortcut for `phantom={\refstepcounter{#1}}`. The given `<counter>` is increased and ready for labelling. This option is not needed when using the convenient automated numbering introduced with version 2.40, see Subsection 5.1 from page 128.

`/tcb/step and label={<counter>}{<marker>}` (no default, initially unset)

Shortcut for using `/tcb/step` and `/tcb/label→ P. 114`. This option is not needed when using the convenient automated numbering introduced with version 2.40, see Subsection 5.1 from page 128.

**U 2024-10-22** `/tcb/label type=<type>` (no default, initially unset)

This option has a different meaning based upon the chosen labeling mechanism.

- If `/tcb/label is label→ P. 114` is active:

The option key `/tcb/label type` can be used in conjunction with the `cleverref→ CTAN` package [5] or the `zref-clever→ CTAN` package [2] which have to be loaded separately. `<type>` has to be a cross-reference type *known* to `cleverref` like `theorem`, `algorithm`, `result`, etc. References made with `cleverref` will use this type. For an example, see 18.3.5 on page 402. Recent versions of `zref-clever→ CTAN` also work with `/tcb/label is label→ P. 114` and `/tcb/label type` can be used as described below for `/tcb/label is zlabel→ P. 114`.

- If `/tcb/label is zlabel→ P. 114` is active:

The option key `/tcb/label type` can be used only in conjunction with the `zref-clever→ CTAN` package [2] which has to be loaded separately. `<type>` has to be a cross-reference type *known* to `zref-clever`. This `<type>` is bound to an automatic `tcolorbox` counter which has to be set up using `/tcb/new/auto counter→ P. 128`, `/tcb/new/use counter from→ P. 129`, `/tcb/new/use counter→ P. 129`, or `/tcb/new/use counter*→ P. 129`. If `/tcb/label is zlabel→ P. 114` is set, but `zref-clever` is not loaded, using `zref-clever countertype` will be silently ignored.

**U 2023-02-09** `/tcb/no label type` (no value, initially set)

Removes a `/tcb/label type`, if set before.

/tcb/nameref=<text>

(no default, initially unset)

If the `nameref`<sup>→ CTAN</sup> package is loaded, the given `<text>` is used for corresponding `\nameref` macros. If the `zref-titleref`<sup>→ CTAN</sup> package is loaded, the given `<text>` is used to set the reference text for `\ztitleref`. Typically, the `<text>` will be chosen to be identical or nearly identical to the one for `/tcb/title`<sup>→ P. 24</sup>.

*Definition in the preamble:*

```
\newtcolorbox[auto counter,number within=section]{pabox}[2][]{%
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    title=Exam.~\thetcbcounter: #2,#1}
```

```
%\RequirePackage{zref-clever,zref-titleref}
\begin{pabox}[label={mynameLabel},nameref={Title or anything else}]{Title text}
This is a tcolorbox.
\end{pabox}
```

This box is automatically numbered with `\ref{mynameLabel}` on page `\pageref{mynameLabel}`.

The box is titled `\enquote{\nameref{mynameLabel}}`,  
alternatively `\enquote{\ztitleref{mynameLabel}}`,  
or `\enquote{\zcref[noname,ref=title]{mynameLabel}}`.

**Examp. 4.1: Title text**

This is a tcolorbox.

This box is automatically numbered with 4.1 on page 116.

The box is titled “Title or anything else”, alternatively “Title or anything else”, or “Title or anything else”.



/tcb/nameref is used automatically inside `\newtcbtheorem`<sup>→ P. 379</sup>.

/tcb/short title=<text>

(style, no default)

Sets both `/tcb/list entry`<sup>→ P. 137</sup> and `/tcb/nameref` to `<text>`. The most likely use case is to set a *short title* for the «list of tcolorbox(es)» and for box referencing.

N 2017-02-03

### /tcb/hypertarget=<marker>

(no default, initially unset)

A \hypertarget from the package `hyperref`<sup>→ CTAN</sup> [16] is used to create an internal link of an anchor <marker>. This <marker> can be referenced by \hyperlink or /tcb/hyperlink<sup>→ P. 225</sup>.

```
% \usepackage{hyperref}%
\begin{tcolorbox}[enhanced,
colback=red!10,colframe=red!50!black,
hypertarget=hypertwinA,
hyperlink=hypertwinB,
title=Box A]
Click me to jump to Box B.
\end{tcolorbox}
```

Box A

Click me to jump to  
Box B.

N 2017-02-10

### /tcb/bookmark=<text>

(no default, initially unset)

Sets a PDF bookmark with the given <text>, if the package `bookmark`<sup>→ CTAN</sup> [11] is loaded. This bookmark is set with an automated destination (the current box) and is set one level below the current bookmark level.

```
% \usepackage{bookmark}%
\begin{tcolorbox}[colback=blue!10,colframe=blue!50!black,
bookmark=Example for using a bookmark,
title=Example for using a bookmark]
Open the bookmark view of the previewer
to see the bookmark.
\end{tcolorbox}
```

Example for using a  
bookmark

Open the bookmark  
view of the pre-  
viewer to see the  
bookmark.

N 2017-02-10

### /tcb/bookmark\*=<options>{<text>}

(no default, initially unset)

Identical to /tcb/bookmark, but additional <options> from the package `bookmark`<sup>→ CTAN</sup> [11] can be given.

```
% \usepackage{bookmark}%
\begin{tcolorbox}[colback=red!10,colframe=red!50!black,
bookmark*={color:red,italic,bold}%
           {Another bookmark example},
title=Red and bold bookmark]
Open the bookmark view of the previewer
to see the bookmark.
\end{tcolorbox}
```

Red and bold book-  
mark

Open the bookmark  
view of the pre-  
viewer to see the  
bookmark.

N 2018-07-26

### /tcb/index=<entry>

(no default, initially unset)

Adds an index <entry> for the box. This is a shortcut for setting \index{<entry>} to /tcb/phantom<sup>→ P. 114</sup>.

N 2018-07-26

### /tcb/index\*=<name>{<entry>}

(no default, initially unset)

Adds an <entry> to an index with a specific <name>. This is a shortcut for setting \index[<name>]{<entry>} to /tcb/phantom<sup>→ P. 114</sup>. An index extension package like `imakeidx` has to be loaded to use this option key.

## 4.22 Even and Odd Pages

! Also see `/tcb/toggle left and right`<sup>→ P. 53</sup> and `/tcb/toggle enlargement`<sup>→ P. 101</sup> for further even/odd options.

**U** 2015-11-13 `/tcb/check odd page=true|false` (default `true`, initially `false`)

If set to `true`, a precise even/odd page testing for the current box is applied. This is done by using labels. If a box moves to another page, the document has to be compiled twice for the correct settings. If set to `false`, even/odd page tests may give wrong results for the first box of a page.

`/tcb/toggle left and right`<sup>→ P. 53</sup>, `/tcb/toggle enlargement`<sup>→ P. 101</sup>, and `/tcb/if odd page` automatically set `check odd page`, but for `\tcbifoddpage`<sup>→ P. 120</sup> this option has to be set explicitly.

**N** 2015-11-13 `/tcb/if odd page={⟨odd options⟩}{⟨even options⟩}` (style, no default)

If the current box is on an odd page, the `⟨odd options⟩` are applied. On an even page, the `⟨even options⟩` are applied. `/tcb/check odd page` is automatically set for precise even/odd page testing.

```
\begin{tcolorbox}[if odd page={colback=yellow!50}{colback=red!50}]
This box is colored in yellow on an odd page
and is colored in red on an even page.
\end{tcolorbox}
```

This box is colored in yellow on an odd page and is colored in red on an even page.

! If a box is `/tcb/breakable`<sup>→ P. 408</sup>, using `/tcb/if odd page` only acts upon the *first* box. If the setting should be repeated for every partial box of the break sequence, the option should be packed into `/tcb/extras`<sup>→ P. 415</sup>. In this case, `/tcb/check odd page` has to be set explicitly! Also see `/tcb/if odd page*`<sup>→ P. 119</sup>.

**N** 2016-11-18 `/tcb/if odd page or oneside={⟨odd options⟩}{⟨even options⟩}` (style, no default)

For onesided documents, the `⟨odd options⟩` are applied always. For twosided documents, this style is identical to `/tcb/if odd page`.



This option needs the `\usepackage{breakable}` library, see Section 19 on page 406.

For breakable boxes, if the current partial box is on an odd page, the *⟨odd options⟩* are applied. On an even page, the *⟨even options⟩* are applied. `/tcb/check odd page→P. 118` is automatically set for precise even/odd page testing.

In contrast to `/tcb/if odd page→P. 118`, `/tcb/if odd page*` is used on *every* partial box of a break sequences and not only on the *first* box. Another difference is that `/tcb/if odd page*` is applied quite *late* during option processing, while `/tcb/if odd page→P. 118` is applied immediately.

`/tcb/if odd page*` is implemented as `/tcb/if odd page→P. 118` packed into `/tcb/extras→P. 415`.

```
% \tcbuselibrary{breakable}
\begin{tcolorbox}[breakable,if odd page*={colback=yellow!50}{colback=red!50}]
This breakable box is colored in yellow on an odd page
and is colored in red on an even page. For every partial box, the
test is repeated, i.e. this would give a yellow, red, yellow, red, \ldots
sequence for a long content.
\end{tcolorbox}
```

This breakable box is colored in yellow on an odd page and is colored in red on an even page. For every partial box, the test is repeated, i.e. this would give a yellow, red, yellow, red, ... sequence for a long content.

For onesided documents, the *⟨odd options⟩* are applied always. For twosided documents, this style is identical to `/tcb/if odd page*`.

N 2015-11-13

## \tcbifoddpage{\langle odd code\rangle}{\langle even code\rangle}

If the current box is on an odd page, the `\langle odd code\rangle` is executed. On an even page, the `\langle even code\rangle` is executed. For precise even/odd page testing, the `/tcb/check odd page`<sup>P. 118</sup> has to be set manually inside the box options.

The macro `\tcbifoddpage` can be used inside underlay, overlay, or watermark code to test if the box is on an odd page. This will work also for boxes in a break sequence.

The macro can also be used inside the box **content text**. For unbreakable boxes, the correct page test is applied. But for `/tcb/breakable`<sup>P. 408</sup> boxes, `\tcbifoddpage` will always give the result for the page of the *first* box inside the box **content text**. If needed, the methods from the packages `changepage` or `ifoddpage` could be used here.

```
\tcbset{colframe=blue!75!black,colback=white,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,check odd page,
    title={Example for a box on an \tcbifoddpage{\langle odd\rangle}{\langle even\rangle} page},
    watermark text={\tcbifoddpage{\langle odd\rangle}{\langle even\rangle} page!}]
\lipsum[1]
\end{tcolorbox}
```

### Example for a box on an even page

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

N 2016-11-18

## \tcbifoddpageoroneside{\langle odd code\rangle}{\langle even code\rangle}

For onesided documents, the `\langle odd code\rangle` is executed always. For twosided documents, this macro is identical to `\tcbifoddpage`.

## \thetcolorboxnumber

This is a unique identifier (arabic number) for a tcolorbox. It is locally defined inside boxes and has no meaning outside. It is used for precise even/odd page testing, but may also be valuable for elaborate user code.

```
\begin{tcolorbox}[colback=yellow!5,title=Box \thetcolorboxnumber]
This box is \thetcolorboxnumber.
\tcbox[on line,size=fbox]{This box is \thetcolorboxnumber} and
\tcbox[on line,size=fbox]{this box is \thetcolorboxnumber}.
This box is \thetcolorboxnumber.
\end{tcolorbox}
```

Box 1267

This box is 1267. This box is 1268 and this box is 1269. This box is 1267.

## \thetcolorboxpage

This macro contains the expanded arabic page number of the current tcolorbox. It is locally defined inside boxes and has no meaning outside. It is precise only, if `/tcb/check odd page`<sup>P.118</sup> was set.

```
\begin{tcolorbox}[colback=yellow!5,check odd page,
title=Box on page~\thetcolorboxpage]
This box is located on page~\thetcolorboxpage.
\end{tcolorbox}
```

Box on page 121

This box is located on page 121.

## 4.23 Externalization

! See Section 25 on page 485 for the [LIB](#) `external` library of `tcolorbox`.

If the `externalization` library of the `tikz→ CTAN` package is used, a `tcolorbox` could trigger the externalization process which will arise a compilation error.

To avoid this, there are two possible strategies:

- Ensure, that `\tikzexternalisable` is set before a `tcolorbox` is used. If you typically use the pattern `\tikzexternalenable some picture \tikzexternalisable`, there is nothing to care about.
- If `externalization` is enabled globally, use `/tcb/shield externalize` to shield any `tcolorbox`. The preamble code could look like this:

```
\usetikzlibrary{external}
\tikzexternalize
\tcbsset{shield externalize}
```

`/tcb/shield externalize=true|false` (default `true`, initially `false`)

If set to `true`, the drawing part of the `tcolorbox` is not being externalized which is a good thing at the current state of art. Nevertheless, if the `tcolorbox` contains a `tikzpicture`, this picture is still externalized. Pictures drawn with help of `/tcb/tikz upper→ P. 79` or alike are *not* externalized.

! If a `tcolorbox` is used inside a node of an encircling `tikzpicture` which is externalized, do *not* use `\tikzexternalisable` in front of the `tcolorbox`. `/tcb/shield externalize` is deactivated automatically inside a `tikzpicture`.

! `/tcb/shield externalize` is applied for every following `tcolorbox` inside the current TeX group and is not affected by `/tcb/reset→ P. 123`.

`/tcb/external=<file name>` (no default, initially unset)

Convenience option which calls `\tikzsetnextfilename{<file name>}`. Typically, it may be used inside the option list of a `tcolorbox` to set the externalization `<file name>` for the first `tikzpicture` which is discovered *inside* the box content. The package `tikz→ CTAN` [23] or the library [LIB](#) `skins` has to be loaded to use this option. Additionally, `\usetikzlibrary{external}` has to be used.

`/tcb/remake=true|false` (default `true`, initially `false`)

Convenience option which calls `/tikz/external/remake next`. Typically, it may be used inside the option list of a `tcolorbox` to force the remake of the first `tikzpicture` which is discovered *inside* the box content. The package `tikz→ CTAN` [23] or the library [LIB](#) `skins` has to be loaded to use this option. Additionally, `\usetikzlibrary{external}` has to be used.

## 4.24 Miscellaneous

/tcb/reset

(no value, initially set)

Sets (nearly) all `tcolorbox` settings (including loaded libraries) back to their default values *plus* any settings given by `\tcbssetforeverylayer`<sup>→ P. 13</sup>. `/tcb/savedelimiter`<sup>→ P. 33</sup>, `/tcb/capture`<sup>→ P. 109</sup>, and `/tcb/shield externalize`<sup>→ P. 122</sup> keep their values. Also, all raster values (see 16 on page 311) are not reset.

This option is useful for boxes in boxes where the inner box should not inherit the settings of the outer box. Note that for boxes inside boxes the `reset` is done automatically, if the standard settings of the package are used (v2.40 and above), see Section 4.16 from page 106.

/tcb/code=<code>

(no default, initially unset)

The given `<code>` is executed immediately. This option is useful to place some arbitrary code into an option list.

```
\tcbsset{colback=red!5!white,colframe=red!75!black,
         code={Useless at this spot but functional.},
         fonttitle=\bfseries}

\begin{tcolorbox}[code={\newcommand{\mycommand}{\textit{working}}},
                title=My \mycommand\ title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

Useless at this spot but functional.

My *working* title

This is a **tcolorbox**.


N 2022-05-25	/tcb/IfBlankTF={⟨token list⟩}{⟨true options⟩}{⟨false options⟩}	(no default)
N 2022-05-25	/tcb/IfBlankT={⟨token list⟩}{⟨true options⟩}	(no default)
N 2022-05-25	/tcb/IfBlankF={⟨token list⟩}{⟨false options⟩}	(no default)

Wraps the `\tl_if_blank:n(TF)` command(s) of `expl3` for option setting. If the `⟨token list⟩` consists only of blank spaces or is entirely empty, the `⟨true options⟩` are set. Otherwise, the `⟨false options⟩` are set.

```
\newtcolorbox{mybox}[1]{ IfBlankF={#1}{title=`#1`} }

\begin{mybox}{My title}
This is a tcolorbox.
\end{mybox}

\begin{mybox}{}%
This is a tcolorbox.
\end{mybox}
```

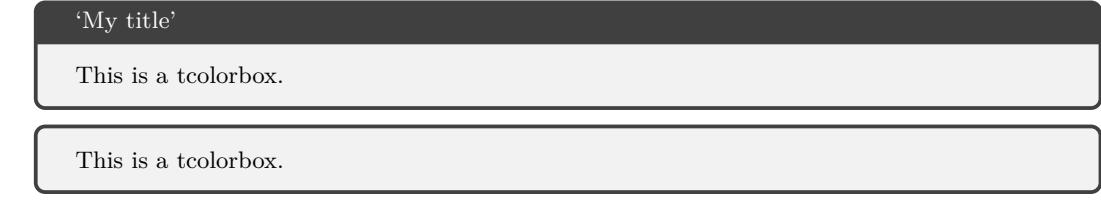

N 2022-05-25	/tcb/IfEmptyTF={⟨token list⟩}{⟨true options⟩}{⟨false options⟩}	(no default)
N 2022-05-25	/tcb/IfEmptyT={⟨token list⟩}{⟨true options⟩}	(no default)
N 2022-05-25	/tcb/IfEmptyF={⟨token list⟩}{⟨false options⟩}	(no default)

Wraps the `\tl_if_empty:n(TF)` command(s) of `expl3` for option setting. If the `⟨token list⟩` is entirely empty, the `⟨true options⟩` are set. Otherwise, the `⟨false options⟩` are set.

```
\newtcolorbox{mybox}[1]{ IfEmptyTF={#1}{colframe=red}{title=`#1`} }

\begin{mybox}{My title}
This is a tcolorbox.
\end{mybox}

\begin{mybox}{}%
This is a tcolorbox.
\end{mybox}
```



<b>N</b> 2020-09-16	<code>/tcb/IfNoValueTF={⟨argument⟩}{⟨true options⟩}{⟨false options⟩}</code>	(no default)
<b>N</b> 2020-09-16	<code>/tcb/IfNoValueT={⟨argument⟩}{⟨true options⟩}</code>	(no default)
	<code>/tcb/IfNoValueF={⟨argument⟩}{⟨false options⟩}</code>	(no default)

Wraps the `\IfNoValue(TF)` command(s) of `xparse` for option setting. If the `⟨argument⟩` has no value, the `⟨true options⟩` are set. Otherwise, the `⟨false options⟩` are set.

```
\DeclareTCColorBox{mybox}{ o }{colframe=red!75!black,
  IfNoValueTF={#1}{colback=red!5!white}{enhanced,interior style image=#1}

\begin{mybox}
This is a tcolorbox.
\end{mybox}

\begin{mybox}[goldshade.png]
This is a tcolorbox.
\end{mybox}
```

This is a tcolorbox.

This is a tcolorbox.

<b>N</b> 2020-09-16	<code>/tcb/IfValueTF={⟨argument⟩}{⟨true options⟩}{⟨false options⟩}</code>	(no default)
<b>N</b> 2020-09-16	<code>/tcb/IfValueT={⟨argument⟩}{⟨true options⟩}</code>	(no default)
	<code>/tcb/IfValueF={⟨argument⟩}{⟨false options⟩}</code>	(no default)

Wraps the `\IfValue(TF)` command(s) of `xparse` for option setting. If the `⟨argument⟩` has a value, the `⟨true options⟩` are set. Otherwise, the `⟨false options⟩` are set.

```
\DeclareTCColorBox{mybox}{ o }{colframe=red!75!black,colback=red!5!white,
  IfValueT={#1}{title={\fbox{\frqq #1\frqq}},fonttitle=\bfseries}

\begin{mybox}
This is a tcolorbox.
\end{mybox}

\begin{mybox}[My title]
This is a tcolorbox.
\end{mybox}
```

This is a tcolorbox.

«My title»

This is a tcolorbox.

<code>/tcb/IfBooleanTF={⟨argument⟩}{⟨true options⟩}{⟨false options⟩}</code>	(no default)
<code>/tcb/IfBooleanT={⟨argument⟩}{⟨true options⟩}</code>	(no default)
<code>/tcb/IfBooleanF={⟨argument⟩}{⟨false options⟩}</code>	(no default)

N 2020-09-16  
N 2020-09-16

Wraps the `\IfBoolean(TF)` command(s) of `xparse` for option setting. If the `⟨argument⟩` is `\BooleanTrue`, the `⟨true options⟩` are set. If the `⟨argument⟩` is `\BooleanFalse`, the `⟨false options⟩` are set.

```
\DeclareTCBox{mybox}{ s }{colframe=red!75!black,
  IfBooleanTF={#1}{colback=yellow!50!red}{colback=red!5!white} }

\begin{mybox}
This is a tcolorbox.
\end{mybox}

\begin{mybox}*
This is a tcolorbox.
\end{mybox}
```

This is a tcolorbox.

This is a tcolorbox.

**/tcb/void**

(no value, initially unset)

Anihilates the current `tcolorbox` as far as possible. Basically, this comments out the whole `tcolorbox` by using a key. If the option list of the current `tcolorbox` contains arbitrary code with global impact (like counter settings), these actions are not undone automatically. Nevertheless, the effects of `/tcb/phantom`<sup>→ P. 114</sup>, `/tcb/step`<sup>→ P. 115</sup>, `/tcb/new/auto counter`<sup>→ P. 128</sup>, etc., are removed by `/tcb/void`.

```
A%
\begin{tcolorbox}[
    title=This box is completely removed by the following key,
    void
]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

B

AB

! This option key cannot be applied for every situation. For example, if several box environments with the same environment name are nested, for the outer environment `/tcb/void` cannot be used, since the end of the inner environment will be misinterpreted as end of the outer environment. Also, `/tcb/void` cannot be used for environments wrapped with `\tcolorboxenvironment`<sup>→ P. 23</sup>.

**/tcb/nirvana**

(no value, initially unset)

The contents of the current `tcolorbox` are processed including counter settings, but the box is just not drawn. Therefore, `/tcb/nirvana` is less radical than `/tcb/void` and several box environments can be nested without problems.

```
A%
\begin{tcolorbox}[
    title=This box is completely removed by the following key,
    nirvana
]
This is a \textbf{tcolorbox}.
\begin{tcolorbox}
Nested Box
\end{tcolorbox}
\end{tcolorbox}%
```

B

AB

## 5 Initialization Option Keys

The *initialization* options are only applicable for the generation of new environments and commands based on `tcolorbox` and friends. Particularly, they can be used for

- `\newtcolorbox`<sup>→ P. 16</sup>, `\NewTColorBox`<sup>→ P. 17</sup>, `\NewTotalTCBox`<sup>→ P. 19</sup>,
- `\newtcbox`<sup>→ P. 20</sup>, `\NewTCBox`<sup>→ P. 21</sup>, `\NewTotalTCBox`<sup>→ P. 22</sup>,
- `\newtcblisting`<sup>→ P. 337</sup>, `\NewTCBListing`<sup>→ P. 339</sup>,
- `\newtcbinputlisting`<sup>→ P. 341</sup>, `\NewTCBInputListing`<sup>→ P. 342</sup>,
- `\new tcbtheorem`<sup>→ P. 379</sup>, `\NewTcbTheorem`<sup>→ P. 379</sup>,
- `\newtcboxfit`<sup>→ P. 459</sup>, `\NewTCBoxFit`<sup>→ P. 460</sup>, `\NewTotalTCBoxFit`<sup>→ P. 461</sup>,

and friends like `\renewtcolorbox`<sup>→ P. 16</sup>, etc.



Typically, these options may generate counters and alike. It is **strongly** recommended that you use initialization options inside the preamble only. Otherwise, you may get trouble when using L<sup>A</sup>T<sub>E</sub>X's `\include` features. Also, it is recommended to generate new environments and commands with these options *after* `hyperref` is loaded to avoid warnings about *duplicate identifiers*.

### 5.1 Numbered Boxes

Counters assigned using the initialization options are administrated automatically. Especially, they are increased for each new box. Independent from the real counter name, the counter value can be referenced by `\thetcbcounter`, e.g. inside the title of the box. The real counter name is stored inside `\tcbcounter`.

`/tcb/new/auto counter` (no value, initially unset)

Creates a new counter automatically. With `/tcb/new/number format`<sup>→ P. 130</sup> and `/tcb/new/number within`<sup>→ P. 130</sup>, the appearance and behavior of the counter can be changed. The counter value is referenced by `\thetcbcounter`.

*Definition in the preamble:*

```
\newtcolorbox[auto counter,number within=section]{pabox}[2][]{%
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    title=Examp.\thetcbcounter: #2,#1}
```

```
\begin{pabox}[label={myautocounter}]{Title with number}
This box is automatically numbered with \ref{myautocounter} on page
\pageref{myautocounter}. Inside the box, the \thetcbcounter\ can
also be referenced by |\thetcbcounter|.
The real counter name is \texttt{\tcbcounter}.
\end{pabox}
```

#### Examp. 5.1: Title with number

This box is automatically numbered with 5.1 on page 128. Inside the box, the 5.1 can also be referenced by `\thetcbcounter`. The real counter name is `tcb@cnt@pabox`.

`/tcb/new/use counter from=<tcolorbox>` (no default, initially unset)

Here, a counter from another `<tcolorbox>` is reused. Note that the settings for `/tcb/new/number format`<sup>→ P. 130</sup> and `/tcb/new/number within`<sup>→ P. 130</sup> are inherited and cannot be changed. The counter value is referenced by `\thetcbcounter`.

```
\newtcolorbox[use counter from=pabox]{mybox}[2][]{%
    colback=blue!5!white,colframe=blue!75!black,fonttitle=\bfseries,
    title=Some Box \thetcbcounter: #2,#1}

\begin{mybox}[label={myusecounterfrom}]{Title with continued number}
This box is automatically numbered with \ref{myusecounterfrom} on page
\pageref{myusecounterfrom}. Inside the box, the \thetcbcounter\ can
also be referenced by |\thetcbcounter|.
The real counter name is \texttt{\tcbcounter}.
\end{mybox}
```

#### Some Box 5.2: Title with continued number

This box is automatically numbered with 5.2 on page 129. Inside the box, the 5.2 can also be referenced by `\thetcbcounter`. The real counter name is `tcb@cnt@pabox`.

`/tcb/new/use counter=(counter)` (no default, initially unset)

Here, an ordinary existing L<sup>A</sup>T<sub>E</sub>X `<counter>` is used for numbering. With `/tcb/new/number format`<sup>→ P. 130</sup> and `/tcb/new/number within`<sup>→ P. 130</sup>, the appearance and behavior of the counter can be changed. The counter value is referenced by `\thetcbcounter`.

```
% \newcounter{myexample}% preamble
\newtcolorbox[use counter=myexample,number format=\Alph]{mybox}[2][]{%
    colback=green!5!white,colframe=green!55!black,fonttitle=\bfseries,
    title=Some Box \thetcbcounter: #2,#1}

\begin{mybox}[label={myusecounter}]{Title with \LaTeX\ number}
This box is automatically numbered with \ref{myusecounter} on page
\pageref{myusecounter}. Inside the box, the \thetcbcounter\ can
also be referenced by |\thetcbcounter|.
The real counter name is \texttt{\tcbcounter}.
\end{mybox}
```

#### Some Box A: Title with L<sup>A</sup>T<sub>E</sub>X number

This box is automatically numbered with A on page 129. Inside the box, the A can also be referenced by `\thetcbcounter`. The real counter name is `myexample`.

N 2014-09-19 `/tcb/new/use counter*=(counter)` (no default, initially unset)

An existing L<sup>A</sup>T<sub>E</sub>X `<counter>` is used for numbering. In contrast to `/tcb/new/use counter`, the options `/tcb/new/number format`<sup>→ P. 130</sup> and `/tcb/new/number within`<sup>→ P. 130</sup> are ignored. Use this for counters which are already configured outside the `tcolorbox` package, e.g. the standard `figure` counter.

`/tcb/new/no counter` (no value, initially set)

The created boxes are not numbered. This is the default. The option may be used to overrule a previous option.

N 2019-10-18 `/tcb/new/reset counter on overlays=true|false` (default `true`, initially `false`)

For `beamer` slides, this invokes the `\resetcounteronoverlays` command for the box counter. The counter is automatically reset on subsequent overlay slides of a frame. Thereby, the counter will be the same on all slides of every frame.

`/tcb/new/number within=<counter>` (no default, initially unset)

The automatic counter is set to zero, if `<counter>` is increased. Additionally, during output, the value of `<counter>` is prepended to the value of the automatic counter.

To prepend the automatic counter with the chapter number and to reset it with every new chapter, use:

```
number within=chapter
```

See `/tcb/new/use counter`<sup>→ P. 129</sup> for a complete example.

`/tcb/new/number format=<format macro>` (no default, initially `\arabic`)

Declares the format of the automatic counter. The `<format macro>` can be any valid L<sup>A</sup>T<sub>E</sub>X number formatting macro like `\arabic`, `\roman`, etc.

To display the counter value in large roman numbers, use:

```
number format=\Roman
```

See `/tcb/new/auto counter`<sup>→ P. 128</sup> for a complete example.

`/tcb/new/number freestyle=<code>` (no default, initially unset)

Allows advanced control over the complete number format. This option overrules the format given by `/tcb/new/number within` and `/tcb/new/number format`. Nevertheless, you can combine it with `/tcb/new/number within` to get the desired reset property.

The `<code>` is some formatting code which should contain `\tcbcounter` to reference the automated counter. Since this `<code>` is expanded, you have to secure each macro with `\noexpand` with exception of `\tcbcounter`.

*Definition in the preamble:*

```
\newcolorbox[auto counter, number within=section,
  number freestyle={(Q/\noexpand\thesection/\noexpand\Alph{\tcbcounter})},
  ]{phbox}[2][]{%
  colback=yellow!15!white, colframe=blue!75!black, fonttitle=\bfseries,
  title=Question~\thetcbcounter: #2,#1}
```

```
\begin{phbox}[label={myfreestyle}]{Title with freestyle number}
This box is automatically numbered with \ref{myfreestyle} on page
\pageref{myfreestyle}. Inside the box, the \thetcbcounter\ can
also be referenced by |\thetcbcounter|.
The real counter name is \texttt{\tcbcounter}.
\end{phbox}
```

#### Question (Q/5/A): Title with freestyle number

This box is automatically numbered with (Q/5/A) on page 130. Inside the box, the (Q/5/A) can also be referenced by `\thetcbcounter`. The real counter name is `tcb@cnt@phbox`.



The following options `/tcb/new/crefname` and `/tcb/new/Crefname` need to be set inside the preamble. Note that `cleveref`<sup>→ CTAN</sup> had its last update in 2018 (as of 2025-06-04) and had or has conflicts with recent L<sup>A</sup>T<sub>E</sub>X kernels. `zref-clever`<sup>→ CTAN</sup> is a possible alternative.

U 2014-12-01

`/tcb/new/crefname={⟨singular⟩}{⟨plural⟩}`

(no default, initially unset)

This option key can be used only in conjunction with the `cleveref`<sup>→ CTAN</sup> package [5] which has to be loaded separately. It creates a cross-reference type for the new `tcolorbox`'es, where the lowercase `⟨singular⟩` and `⟨plural⟩` forms of the cross-reference are given. This type is the environment or macro name and `/tcb/label type`<sup>→ P. 115</sup> is set automatically. See `/tcb/label type`<sup>→ P. 115</sup> and [5] for more information.

U 2014-12-01

`/tcb/new/Crefname={⟨singular⟩}{⟨plural⟩}`

(no default, initially unset)

This option key can be used only in conjunction with the `cleveref`<sup>→ CTAN</sup> package [5] which has to be loaded separately. It creates a cross-reference type for the new `tcolorbox`'es, where the uppercase `⟨singular⟩` and `⟨plural⟩` forms of the cross-reference are given. This type is the environment or macro name and `/tcb/label type`<sup>→ P. 115</sup> is set automatically. See `/tcb/label type`<sup>→ P. 115</sup> and [5] for more information.

```
\documentclass[12pt]{article}
\usepackage[papersize={160mm,80mm},noheadfoot,margin=10mm]{geometry}
\usepackage{varioref,cleveref}
\usepackage{tcolorbox}

\newtcolorbox[auto counter,number within=section,
 crefname={bluebox}{blueboxes}]{%
 {mybluebox}[2][][colback=blue!5!white,colframe=blue!75!black,fonttitle=\bfseries,
 title=Bluebox \thetcbcounter: #2,#1]

\begin{document}
\section{Blue}

\begin{mybluebox}[label={myreference}]{My title}
This is an example.
\end{mybluebox}

\noindent\texttt{\Cref{myreference}, \cref{myreference}.\\
\CPageref{myreference}, \CPageref{myreference}.\\
\nameCref{myreference}, \namecref{myreference}.\\
\labelCref{myreference}, \labelCPageref{myreference}.\\
With \texttt{varioref}:\\
\Vref{myreference}, \vref{myreference}.}
\end{document}
```

## 1 Blue

Bluebox 1.1: My title

This is an example.

Bluebox 1.1, bluebox 1.1.  
Page 1, page 1.  
Bluebox, bluebox.  
1.1, 1.  
With varioref:  
Bluebox 1.1, bluebox 1.1.

/tcb/new/blend into=<name>

(style, no default, initially unset)

Used to comfortably blend into an existing schema of naming and numbering for some selected cases. For example, a `tcolorbox` can be used to display and entitle an image pretending to be a standard `figure` environment. Here, `/tcb/title`<sup>→ P.24</sup> is used instead of the standard `\caption` and `/tcb/list text`<sup>→ P.137</sup> can be used instead of the optional parameter of the standard `\caption`. Also, `/tcb/new/list type`<sup>→ P.135</sup> is automatically adapted (changed with version 6.0.5).

Feasible values for `<name>` are:

- `figures`: blend into the standard `figure` environment.
- `tables`: blend into the standard `table` environment.
- `listings`: blend into the standard `lstlisting` environment of the package `listings`<sup>→ CTAN</sup> [6].

! Note that `blend into=listings` can only be used in the document content or, preferably, inside a `\AtBeginDocument` clause! Using it without `\AtBeginDocument` inside the preamble does not work since the `listings` packages initializes its counter also inside `\AtBeginDocument`.

```
\begin{figure}[htb]
  \centering\includegraphics[height=4cm]{lichtspiel.jpg}
  \caption{A standard figure}
\end{figure}

\newtcolorbox[blend into=figures]{myfigure}[2]{float=htb,capture=hbox,
  title={#2},every float=\centering,#1}

\begin{myfigure}{A tcolorbox figure}
  \includegraphics[height=4cm]{lichtspiel.jpg}
\end{myfigure}
```



Figure 1: A standard figure

Figure 2: A tcolorbox figure



This option formats the title output of /tcb/new/blend into<sup>→ P. 132</sup>. Note that this is a common `tcolorbox` option which should be set globally or in the normal option part of `\newtcolorbox`<sup>→ P. 16</sup>.

Feasible values for <value> are:

- `colon`: use name/number plus colon.
- `dash`: use name/number plus dash.
- `colon hang`: use name/number plus colon with hanging indent.
- `dash hang`: use name/number plus dash with hanging indent.

```
\newtcolorbox[blend into=figures]{myfigure}[2][]{float=htb,capture=hbox,
blend before title=dash hang,title={#2},every float=\centering,#1}

\begin{myfigure}{A tcolorbox figure with quite a long title}
  \includegraphics[height=5cm]{lichtspiel.jpg}
\end{myfigure}
```

Figure 3 – A tcolorbox figure with  
quite a long title



This option formats the title output of /tcb/new/blend into<sup>→ P. 132</sup>. The <code> takes one parameter, the name/number. Use this, if /tcb/blend before title<sup>→ P. 133</sup> is not flexible enough.

```
\newtcolorbox[blend into=figures]{myfigure}[2][]{float=htb,capture=hbox,  
blend before title code={\fbox{\#\#1}\ },title={#2},every float=\centering,#1}  
  
\begin{myfigure}{A tcolorbox figure}  
  \includegraphics[height=6cm]{lichtspiel.jpg}  
\end{myfigure}
```

Figure 4 | A tcolorbox figure



## 5.2 Lists of tcolorboxes

For figures and tables, L<sup>A</sup>T<sub>E</sub>X provides the `\listoffigures` and `\listoftables` commands to create lists of these numbered entities. Also, a `tcolorbox` can be part of such a kind of list.

1. Assign a list `<name>` by the *initialization* option `/tcb/new/list inside`.
2. Optionally, a new `<type>` for list entries may be assigned by the *initialization* option `/tcb/new/list type`.
3. List entries are generated automatically within each new `tcolorbox` using the above initialization.
  - If `/tcb/list entry`<sup>→ P. 137</sup> is set, the entry is generated with it.
  - Otherwise, if `/tcb/title`<sup>→ P. 24</sup> is set, the entry is generated with it.
  - Otherwise, the entry is generated with the current number and the environment name.
4. The generated list is displayed by `\tcblistof`<sup>→ P. 136</sup>.

`/tcb/new/list inside=<name>` (no default, initially unset)

Assigns a list or contents file to the generated `tcolorboxes`. Entries to this list are saved to a file which gets the `<name>` as file name extension. The list is referenced by this name in `\tcblistof`<sup>→ P. 136</sup>. For example:

```
list inside=exam
```

See Section 17.11 from page 373 for a complete example.

`/tcb/new/list type=<type>` (no default, initially `tcolorbox`)

Optionally, some `<type>` can be assigned to the list entries. For a new `<type>`, a macro `\l@<type>` has to exist which controls the format of the list entry. The default type is defined by

```
\newcommand*\l@tcolorbox{\dottedtocline{1}{1.5em}{2.3em}}
```

This is identical to the `\l@section` setting of L<sup>A</sup>T<sub>E</sub>X. `\l@tcolorbox` can be redefined or a new `<type>` can be assigned.

## \tcblistof[*macro*]{*name*} [*short*] {*title text*}

Displays the generated list of `tcolorbox`s with the given *name*. The heading is generated by *macro* [*short*] {*title text*} where `\section` is the default setting for *macro*. Here, as usual, *title text* is the title of the section or chapter while *short* is a shorter title for headings and table of contents.

- If *macro* ends with a \*, `\tcblistof` mimics the behavior of `\listoffigures` from the standard L<sup>A</sup>T<sub>E</sub>X classes and adds the title to the left and right mark for headings.
- If *macro* starts with `\chapter`, a possible two column document setting is restored to one column (as standard L<sup>A</sup>T<sub>E</sub>X classes do for `\listoffigures`).

To display the list inside a subsection, use for example:

```
\tcblistof[\subsection]{exam}{List of Exercises}
```

The result of the example is found as Subsection 17.12 on page 376.

To apply the list similar to `\listoffigures` for a report or book, use for example:

```
\tcblistof[\chapter*]{exam}{List of Exercises}
```

To set a short title for headings with the default `\section` setting, use for example:

```
\tcblistof{exam}{List of Exercises}{Elaborate List of Fine Exercises  
for all Students of my Course}
```



The core of the list is generated by `\@starttoc{name}` which can be wrapped into an own macro.

! The following options are not initialization options, but common options, which are typically reasonable in connection with lists of `tcolorboxes`.

`/tcb/list entry=<text>` (no default, initially unset)

If the «list of `tcolorbox(es)`» feature described in the current subsection is used, this key describes the `<text>` for an entry into the generated list, e.g.

```
list entry={\protect\numberline{\thetcbcounter}My beautiful Example}
```

See Section 17.11 from page 373 for a complete example.

If `\thetcbcounter` is omitted, `/tcb/list entry` could be used for unnumbered boxes too.

! This is a customization option. For numbered boxes, `/tcb/list entry` typically has not to be given, because this entry will be generated automatically.

N 2014-09-19

`/tcb/list text=<text>` (style, no default)

This is a shortcut for setting `/tcb/list entry` to `\protect\numberline{\thetcbcounter}<text>`. So, the following settings are identical:

```
list text={My beautiful Example},  
list entry={\protect\numberline{\thetcbcounter}My beautiful Example}
```

See Section 17.11 from page 373 for a complete example.

`/tcb/add to list=<list>{<type>}` (no default, initially unset)

If the «list of `tcolorbox(es)`» feature described in the current subsection is used, list entries are generated automatically. With this key, you can enforce an entry to the given `<list>` with the given `<type>`. This issues:

`\addcontentsline{<list>}{<type>}{<entry text>}`

`<entry text>` may be given by `/tcb/list entry`.

! This is a customization option. For numbered boxes, this feature is configured automatically, where `<list>` is set by `/tcb/new/list inside`<sup>P. 135</sup> and `<type>` is set by `/tcb/new/list type`<sup>P. 135</sup>

## 6 Side by Side

A *side by side* box is a special `tcolorbox`<sup>→ P. 12</sup> where the upper and lower part of the box are set side by side. All boxes of this kind are unbreakable.



Further side by side options for code examples are `/tcb/listing side text`<sup>→ P. 353</sup>, `/tcb/text side listing`<sup>→ P. 353</sup>, `/tcb/listing outside text`<sup>→ P. 353</sup>, and `/tcb/text outside listing`<sup>→ P. 354</sup>.

### 6.1 Basic Settings

`/tcb/sidebyside=true|false`

(default `true`, initially `false`)

Normally, the upper part and the lower part of the box have their positions as their names suggest. If `sidebyside` is set to `true`, the upper part is drawn *left-handed* and the lower part is drawn *right-handed*. Both parts are drawn together with the geometry settings of the upper part but the space is divided horizontally according to the following options. Colors, fonts, and box content additions are used individually. The resulting box is unbreakable.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside]
  This is the upper (\textit{left-handed}) part.
\ tcblower
  This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```

My title

This is the upper (*left-handed*) part.

This is the lower (*right-handed*) part.

```
% \usepackage{lipsum}
% \tcbuselibrary{skins}
\begin{tcolorbox}[bicolor,sidebyside,righthand width=3cm,
  sharp corners,boxrule=.4pt,colback=green!5,colbacklower=green!50!black!50]
  \lipsum[2]
\ tcblower
  \includegraphics[width=\ linewidth]{goldshade}%
\end{tcolorbox}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



Sets the vertical *<alignment>* for the left-handed and right-handed part.

Feasible values for *<alignment>* are:

- **center**: identical to `minipage` option `c`.
- **top**: identical to `minipage` option `t` (aligns the top lines of the left-handed and right-handed side according to their baselines).

! This value of *<alignment>* needs `luacolor`<sup>→ CTAN</sup> to work properly since version 6.0.0 (2023-02-10). Adding `\strut` may help alternatively to simulate the effect for equal font heights.

- **bottom**: identical to `minipage` option `b` (aligns the bottom lines of the left-handed and right-handed side according to their baselines).
- **center seam**: aligns the center of the left-handed and right-handed side.
- **top seam**: aligns the very top seam of the left-handed and right-handed side.
- **bottom seam**: aligns the very bottom seam of the left-handed and right-handed side.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,nobeforeafter,
left=2mm,right=2mm,sidebyside,sidebyside gap=6mm,width=(\linewidth-2mm)/3}

\begin{tcolorbox}[adjusted title=center,sidebyside align=center]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=top,sidebyside align=top]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=bottom,sidebyside align=bottom]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}
```

**center**

This is a text which is too long for one line. This is a short text.

**top**

This is a text which is too long for one line. This is a short text.

**bottom**

This is a text which is too long for one line. This is a short text.

**center**, **top**, and **bottom** are identical to the known corresponding `minipage` options. While this is the preferred approach for text content, the result for boxed content like tables or images may not be as expected.

For such content, one may use **center seam**, **top seam**, and **bottom seam**. For example, **top seam** aligns the very top seam of the left-handed and right-handed side.

```

\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
size=small,righthand width=4cm,sidebyside,sidebyside gap=6mm,lower separated=false}

\begin{tcolorbox}[adjusted title=center seam,sidebyside align=center seam]
This is my description text for the pictures displayed on the right-handed side.
\tcblower
\includegraphics[width=\linewidth/2]{goldshade}%
\includegraphics[width=\linewidth/2]{blueshade}
\end{tcolorbox}


\begin{tcolorbox}[adjusted title=top seam,sidebyside align=top seam]
This is my description text for the pictures displayed on the right-handed side.
\tcblower
\includegraphics[width=\linewidth/2]{goldshade}%
\includegraphics[width=\linewidth/2]{blueshade}
\end{tcolorbox}

\begin{tcolorbox}[adjusted title=bottom seam,sidebyside align=bottom seam]
This is my description text for the pictures displayed on the right-handed side.
\tcblower
\includegraphics[width=\linewidth/2]{goldshade}%
\includegraphics[width=\linewidth/2]{blueshade}
\end{tcolorbox}

```


### center seam

This is my description text for the pictures displayed on the right-handed side.



### top seam

This is my description text for the pictures displayed on the right-handed side.



### bottom seam

This is my description text for the pictures displayed on the right-handed side.



`/tcb/sidebyside gap=<length>`

(no default, initially 10mm)

Sets the horizontal distance between the left-handed and right-handed part to `<length>`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,nobeforeafter,
sidebyside,width=(\linewidth-2mm)/2}

\begin{tcolorbox}[adjusted title=Wide gap,sidebyside gap=30mm]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}\hfill
\begin{tcolorbox}[adjusted title=Narrow gap,sidebyside gap=1mm]
This is a text which is too long for one line.
\tcblower
This is a short text.
\end{tcolorbox}
```

### Wide gap

This is  
a text  
which is  
too long  
for one  
line.

This is  
a short  
text.

### Narrow gap

This is a text which  
is too long for one This is a short text.  
line.

`/tcb/lefthand width=<length>`

(no default, initially unset)

Sets the width of the left-handed part to the given `<length>`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside,lefthand width=3cm]
This is the upper (\textit{left-handed}) part.
\tcblower
This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```

### My title

This is the upper  
(*left-handed*) part.

This is the lower (*right-handed*) part.

`/tcb/righthand width=<length>`

(no default, initially unset)

Sets the width of the right-handed part to the given `<length>`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside,righthand width=3cm]
This is the upper (\textit{left-handed}) part.
\tcblower
This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```

### My title

This is the upper (*left-handed*) part.

This is the lower  
(*right-handed*) part.

`/tcb/lefthand ratio=<fraction>` (no default, initially 0.5)

Sets the width of the left-handed part to the given `<fraction>` of the available space. `<fraction>` is a value between 0 and 1.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside,lefthand ratio=0.25]
This is the upper (\textit{left-handed}) part.
\tcblower
This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```

My title

This is the upper  
(*left-handed*) part.

This is the lower (*right-handed*) part.

`/tcb/righthand ratio=<fraction>` (no default, initially 0.5)

Sets the width of the right-handed part to the given `<fraction>` of the available space. `<fraction>` is a value between 0 and 1.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,sidebyside,righthand ratio=0.25]
This is the upper (\textit{left-handed}) part.
\tcblower
This is the lower (\textit{right-handed}) part.
\end{tcolorbox}
```

My title

This is the upper (*left-handed*) part.


This is the lower  
(*right-handed*) part.

If one side of a side-by-side box should be adapted to the width of its content, this width has to be computed beforehand. The following example uses a savebox `\mysavebox` to store the picture to determine its width. A more convenient way to handle this task is to use the methods from Section 6.2 on the following page.

```
% tcbuselibrary{skins}
% \usepackage{lipsum}
% \newsavebox\mysavebox % preamble
\DeclareTotalTColorBox{\mysidebox}{ O{} +m +m }{
  bicolor,colback=white,colbacklower=yellow!10,
  fonttitle=\bfseries,center title,
  sidebyside,
  code={\sbox{\mysavebox}{#2}},
  lefthand width=\wd\mysavebox,
  drop lifted shadow,
  #1
}
{\usebox{\mysavebox}\tcblower#3}

\mysidebox[title=The Triangle]{%
\begin{tikzpicture}
\path[fill=red!20,draw=red!50!black]
(0,0) node[below]{A} -- (3,1) node[right]{B}
-- (1,4) node[above]{C} -- cycle;
\end{tikzpicture}%
}%
\lipsum[1]
}
```

The Triangle

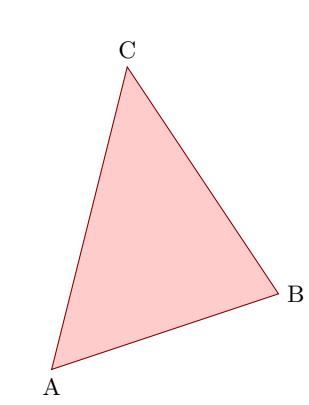

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

## 6.2 Advanced Settings


N 2015-11-20

\tcbsidebyside[*options*] {*left-handed content*} {*right-handed content*}

Creates a colored box using more or less arbitrary *options* for a `tcolorbox`<sup>P. 12</sup>. The `/tcb/sidebarby`<sup>P. 138</sup> option is set to `true` and the *left-handed content* and *right-handed content* is filled into the box appropriately. The resulting box is unbreakable. `\tcbsidebyside` is not only a shortcut for using a normal `tcolorbox`<sup>P. 12</sup> with `/tcb/sidebarby`<sup>P. 138</sup>, but allows setting further options like `/tcb/sidebarby` `adapt`<sup>P. 145</sup> and `/tcb/sidebarby` `switch`<sup>P. 147</sup>.

```
% \tcbuselibrary{skins}
% \usepackage{lipsum}
\tcbsidebyside[title=The Triangle,
sidebyside adapt=left,
bicolor,colback=white,colbacklower=yellow!10,
fonttitle=\bfseries,center title,drop lifted shadow,
]{%
\begin{tikzpicture}
\path[fill=red!20,draw=red!50!black]
(0,0) node[below]{A} -- (3,1) node[right]{B}
-- (1,4) node[above]{C} -- cycle;
\end{tikzpicture}%
}{%
\lipsum[1]
}
```

The Triangle

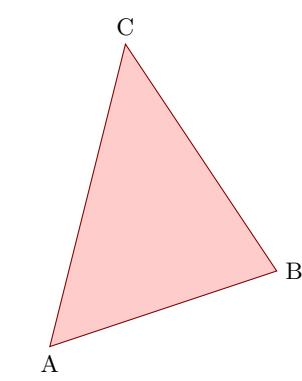

Lore ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

The option allows the left-handed and/or right-handed side to determine the dimensions of the box. This option is only valid inside `\tcbsidebyside`<sup>P. 144</sup>.

Feasible values for `<side(s)>` are:

- **none**: no measurement of left-handed and right-handed side.
- **left**: the actual width of the left-handed content is used to set `/tcb/leftwidth`<sup>P. 141</sup>.
- **right**: the actual width of the right-handed content is used to set `/tcb/rightwidth`<sup>P. 141</sup>.
- **both**: the actual width of the left-handed and right-handed content is used to set `/tcb/leftwidth`<sup>P. 141</sup>, `/tcb/rightwidth`<sup>P. 141</sup>, and the overall `/tcb/width`<sup>P. 41</sup>.

```
% \tcbselibrary{skins}
\tcbsidebyside[sidebyside adapt=left,
    title=Very important table,
    beamer,colframe=blue!50!black,colback=blue!10,
    lower separated=false,sidebyside gap=5mm
]{%
\begin{tabular}{|l|c|r|}\hline
    left & center & right\\\hline
    A & B & C\\\hline
    D & E & F\\\hline
\end{tabular}
}%
This table contains the most important figures for
all future actions. You may notice that B follows A,
C follows B, and so on.
}
```

### Very important table

left	center	right
A	B	C
D	E	F


This table contains the most important figures for all future actions. You may notice that B follows A, C follows B, and so on.

```
% \tcbselibrary{skins}
\tcbsidebyside[sidebyside adapt=right,
    blanker,sidebyside gap=5mm
]{%
\lipsum[2]
}%
\begin{tikzpicture}
\path [fill=yellow,draw=yellow!75!red] (0,0) circle (1cm);
\fill [red] (45:5mm) circle (1mm);
\fill [red] (135:5mm) circle (1mm);
\draw [line width=1mm,red] (215:5mm) arc (215:325:5mm);
\end{tikzpicture}
}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



```
% \tcbuselibrary{skins}
\tcbsidebyside[sidebyside adapt=both,
enhanced,center,
title=Both sides adapted,
attach boxed title to top center={yshift=-2mm},
coltitle=black,boxed title style={colback=red!25},
segmentation style=solid,colback=red!5,colframe=red!50
]{%
\begin{tabular}{|l|c|r|}\hline
left & center & right\\\hline
A & B & C\\\hline
D & E & F\\\hline
\end{tabular}
}{%
\begin{tikzpicture}
\path [fill=yellow,draw=yellow!75!red] (0,0) circle (1cm);
\fill [red] (45:5mm) circle (1mm);
\fill [red] (135:5mm) circle (1mm);
\draw [line width=1mm,red] (215:5mm) arc (215:325:5mm);
\end{tikzpicture}
}
```

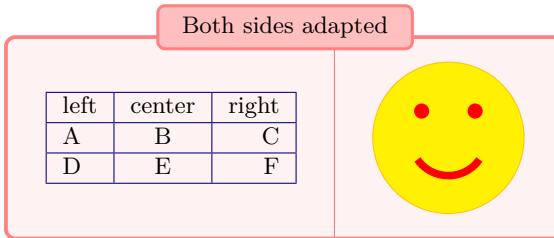

`/tcb/sidebyside switch=true|false` (default `true`, initially `false`)

If set to `true`, the `<left-handed content>` and `<right-handed content>` of `\tcbsidebyside`<sup>→ P. 144</sup> are switched. Obviously, this option is only valid inside `\tcbsidebyside`<sup>→ P. 144</sup>.

The side switching can be made even/odd page sensitive, if used inside `/tcb/if odd page`<sup>→ P. 118</sup>.

```
% \tcbuselibrary{skins}
\tcbsidebyside[Left]{Right}

\tcbsidebyside[sidebyside switch]{Left}{Right}

\tcbsidebyside[title=Very important table,
if odd page={sidebyside switch,sidebyside adapt=right,flushright title}%
{sidebyside adapt=left},
beamer,colframe=blue!50!black,colback=blue!10,
lower separated=false,sidebyside gap=5mm
]{%
\begin{tabular}{|l|c|r|}\hline
left & center & right\\\hline
A & B & C\\\hline
D & E & F\\\hline
\end{tabular}
}%
This table contains the most important figures for
all future actions. You may notice that B follows A,
C follows B, and so on.
}
```

Left	Right									
Right	Left									
<b>Very important table</b>										
This table contains the most important figures for all future actions. You may notice that B follows A, C follows B, and so on.										
<table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>left</th><th>center</th><th>right</th></tr> </thead> <tbody> <tr> <td>A</td><td>B</td><td>C</td></tr> <tr> <td>D</td><td>E</td><td>F</td></tr> </tbody> </table>		left	center	right	A	B	C	D	E	F
left	center	right								
A	B	C								
D	E	F								

## 7 Saving and Loading of Verbatim Texts

The following macros are slightly modified versions of the original macros from the known packages `moreverb` and `verbatim`. They are used implicitly inside of a `tcolorbox` environment, but they can be used outside also.

```
\begin{tcbverbatimwrite}{\langle file name\rangle}
  \langle environment content\rangle
\end{tcbverbatimwrite}
```

Saves the `\langle environment content\rangle` to a file named by `\langle file name\rangle`. T<sub>E</sub>X macros inside the environment are not expanded.

```
\begin{tcbverbatimwrite}{\jobname_verbexp.tex}
  This text is saved \textit{as is}.
\end{tcbverbatimwrite}

Now, we are using the file:\par
\input{\jobname_verbexp.tex}
```

Now, we are using the file:  
This text is saved *as is*.

This environment may be used inside an own environment. Note, that inside the environment definition `\tcbverbatimwrite` has to be used instead of `\begin{tcbverbatimwrite}` and `\end{tcbverbatimwrite}` instead of `\end{tcbverbatimwrite}`.

```
\newenvironment{myverbatim}{%
  \begingroup\tcbverbatimwrite{\jobname_myverb.tex}%
  \endtcbverbatimwrite\endgroup

\begin{myverbatim}
  This is the text which is saved by my own environment.
\end{myverbatim}

Now, we are using the file:\par
\input{\jobname_myverb.tex}
```

Now, we are using the file:  
This is the text which is saved by my own environment.

```
\begin{tcbwritetemp}
  \langle environment content\rangle
\end{tcbwritetemp}
```

Has the same function as `tcbverbatimwrite`, but uses the key value of `tempfile` for the file name.

```
\begin{tcbwritetemp}
  This text is saved \textit{as is}.
\end{tcbwritetemp}

Now, we are using the file:\par
\tcbusetemp
```

Now, we are using the file:  
This text is saved *as is*.

`\tcbusetemp`

Loads the current temporary file which was saved by `tcbwritetemp`.

**/tcb/verbatim ignore percent=true|false** (default true, initially false)

If this option is set to be `true`, the percent sign `%` is silently ignored for `tcbverbatimwrite`<sup>P. 148</sup> and all macros and environments which are built using `tcbverbatimwrite`<sup>P. 148</sup>, e.g. `tcbwritetemp`<sup>P. 148</sup>, `tcblisting`<sup>P. 334</sup>, or `dispExample`<sup>P. 505</sup>.

This option may be useful for creating some special effects, but mainly it is intended to be applied for documentation with DocStrip. The creation of this option was motivated by Yudai Nakata. Note that this option is not getting reset by `/tcb/reset`<sup>P. 123</sup>.

```
Normal usage:  

\begin{tcbwritetemp}  

%\begin{center}\bfseries  

This is my text.  

%\end{center}  

\end{tcbwritetemp}  

\tcbusetemp  

\tcbset{verbatim ignore percent}  

\bigskip Option applied:  

\begin{tcbwritetemp}  

%\begin{center}\bfseries  

This is my text.  

%\end{center}  

\end{tcbwritetemp}  

\tcbusetemp
```

Normal usage:  
This is my text.

Option applied:  
**This is my text.**



Note that *every* percent sign is removed, also escaped ones.

```
% \tcbuselibrary{listings}  

\def\percent{\%}  

\begin{tcblisting}[title=Normal]  

%\begin{center}\bfseries  

This is my 5\percent\ text  

and this is my 10\% text.  

%\end{center}  

\end{tcblisting}  

\begin{tcblisting}[  

title=Option applied,  

verbatim ignore percent]  

%\begin{center}\bfseries  

This is my 5\percent\ text  

and this is my 10\% text.  

%\end{center}  

\end{tcblisting}
```

Normal

```
%\begin{center}\bfseries  

This is my 5\percent\ text  

and this is my 10\% text.  

%\end{center}
```

This is my 5% text and this is my 10% text.

Option applied

```
\begin{center}\bfseries  

This is my 5\percent\ text  

and this is my 10\% text.  

\end{center}
```

**This is my 5% text and this is my 10 text.**

**/tcb/verbatim ignore indentation at end=true|false** (default true, initially true)

If this option is set to be `true`, spaces and tabs before `\end{tcbverbatimwrite}` on the same line are ignored. The same is true for all environments based on `tcbverbatimwrite`<sup>→P.148</sup>. If anything else precedes `\end{tcbverbatimwrite}` on the same line, the complete content is written.

If this option is set to be `false`, everything preceding `\end{tcbverbatimwrite}` is written. This was the default behavior before version 6.0.0.

The idea of `/tcb/verbatim ignore indentation at end` is that the environment can be indented. The creation of this option was inspired by Yukai Chou.

```
% \tcbsuselibrary{minted}
\texttt{verbatim ignore indentation at end=false}

\begin{tcblisting}[listing engine=minted, listing only,
    verbatim ignore indentation at end=false]
    int a;
\end{tcblisting}

\begin{tcblisting}[listing engine=minted, listing only,
    verbatim ignore indentation at end=false]
    int a;
    int b; \end{tcblisting}

\texttt{verbatim ignore indentation at end=true}

\begin{tcblisting}[listing engine=minted, listing only,
    verbatim ignore indentation at end]
    int a;
\end{tcblisting}

\begin{tcblisting}[listing engine=minted, listing only,
    verbatim ignore indentation at end]
    int a;
    int b; \end{tcblisting}

verbatim ignore indentation at end=false

int a;

int a;
int b;

verbatim ignore indentation at end=true

int a;

int a;
int b;
```

# 8 Recording

The package provides some macros and options to take *records* during compilation. This is done by L<sup>A</sup>T<sub>E</sub>X file operations to save some data to a file for later usage. The main application scenario is depicted in 8.3 on the next page where information about example solutions is recorded and read again in 8.4 on page 155.

## 8.1 Macros

N 2014-11-28

### \tcbstartrecording[⟨file name⟩]

Opens a file denoted by ⟨file name⟩ for writing the records. The default file name is `\jobname.records`. See 8.3 on the next page for an example application.

In some situations, a not existing optional parameter may cause parsing problems. If this happens (or just for precaution), use

!

`\tcbstartrecording\relax`

or

`\tcbstartrecording[\jobname.records]`

N 2014-11-28

### \tcbrecord{⟨content⟩}

Records any ⟨content⟩ to the record file. `\tcbrecord` is implemented as `\immediate\write`. `\tcbstartrecording` has to be called before; otherwise, `\tcbrecord` is silently ignored.

`\tcbrecord{\string\solution{\thetcbcounter}{solutions/exercise-\thetcbcounter.tex}}`

N 2014-11-28

### \tcbstoprecording

Closes the current record file which was opened by `\tcbstartrecording` before.

N 2014-11-28

### \tcbinputrecords[⟨file name⟩]

Opens a file denoted by ⟨file name⟩ for reading the records via `\input`. The default file name is the name of the last used record file for saving. `\tcbstoprecording` has to be called before.

## 8.2 Options

N 2014-11-28

### /tcb/record=⟨content⟩

(style, no default)

Records any ⟨content⟩ to the record file, see `\tcbrecord`. This key can be used several times to write several lines.

`record={\string\solution{\thetcbcounter}{solutions/exercise-\thetcbcounter.tex}}`

N 2014-11-28

### /tcb/no recording

Disables `\tcbrecord` and `/tcb/record` inside the current group.

### 8.3 Example: Exercises

The following application example creates exercises and their corresponding solutions. Each pair is generated inside a single `tcolorbox` where the solution is given below `\tcblower`<sup>P. 12</sup>. For every example, the solution part is saved by `/tcb/savelowerto`<sup>P. 31</sup> to a file. The saving is recorded using `/tcb/record`<sup>P. 151</sup>. To enlighten the possibilities, the second exercise has no solution. Finally, the solutions are input in 8.4 on page 155.

*Definition in the preamble:*

```
% \tcbuselibrary{skins}

\NewTColorBox[auto counter,number within=section]{exercise}{+!0{}}
  enhanced,colframe=green!20!black,colback=yellow!10!white,coltitle=green!40!black,
  fonttitle=\bfseries,
  underlay={\begin{tcbclipinterior}
    \shade[inner color=green!80!yellow,outer color=yellow!10!white]
      (interior.north west) circle (2cm);
    \draw[help lines,step=5mm,yellow!80!black,shift={(interior.north west)}]
      (interior.south west) grid (interior.north east);
  \end{tcbclipinterior}},
  title={Exercise~\thetcbcounter:},
  label={exercise@\thetcbcounter},
  attach title to upper=\quad,
  after upper={\par\hfill\textcolor{green!40!black}{%
    {\itshape Solution on page~\pageref{solution@\thetcbcounter}}}},%
  record={\string\solution{\thetcbcounter}{solutions/exercise-\thetcbcounter.tex}},
  #1
}

\NewTotalTColorBox{\solution}{mm}{%
  enhanced,colframe=red!20!black,colback=yellow!10!white,coltitle=red!40!black,
  fonttitle=\bfseries,
  underlay={\begin{tcbclipinterior}
    \shade[inner color=red!50!yellow,outer color=yellow!10!white]
      (interior.north west) circle (2cm);
    \draw[help lines,step=5mm,yellow!80!black,shift={(interior.north west)}]
      (interior.south west) grid (interior.north east);
  \end{tcbclipinterior}},
  title={Solution of Exercise~\ref{exercise@#1} on page~\pageref{exercise@#1}:},
  phantomlabel={solution@#1},
  attach title to upper=\par,
}{{\input{#2}}}

\tcbset{no solution/.style={no recording,after upper=}}
```

```
\tcbstartrecording\relax

\begin{exercise}
  Compute the derivative of the following function:
  \begin{equation*}
    f(x)=\sin((\sin x)^2)
  \end{equation*}
  \tcblower
  The derivative is:
  \begin{align*}
    f'(x) &= \left( \sin((\sin x)^2) \right)' \\
    &= \cos((\sin x)^2) 2\sin x \cos x.
  \end{align*}
\end{exercise}
```

```

\begin{exercise}[no solution]
It holds:
\begin{equation*}
\frac{d}{dx}(\ln|x|) = \frac{1}{x}.
\end{equation*}
\end{exercise}

\begin{exercise}
Compute the derivative of the following function:
\begin{equation*}
f(x)=(\sin(\sin x))^2
\end{equation*}
\tcblower
The derivative is:
\begin{align*}
f'(x) &= \left( (\sin(\sin x))^2 \right)' \\
&= 2\sin(\sin x)\cos(\sin x)\cos x.
\end{align*}
\end{exercise}

\begin{exercise}
Compute the derivative of the following function:
\begin{equation*}
f(x)=\sqrt{x^3-6x^2+2x}
\end{equation*}
\tcblower
The derivative is:
\begin{align*}
f'(x) &= \left( \sqrt{x^3-6x^2+2x} \right)' \\
&= \frac{3x^2-12x+2}{2\sqrt{x^3-6x^2+2x}}.
\end{align*}
\end{exercise}

\begin{exercise}
Compute the derivative of the following function:
\begin{equation*}
f(x)=\left(\frac{2+3x}{1-2x}\right)^3
\end{equation*}
\tcblower
The derivative is:
\begin{align*}
f'(x) &= \left( \left(\frac{2+3x}{1-2x}\right)^3 \right)' \\
&= 3 \left( \frac{2+3x}{1-2x} \right)^2 \frac{(1-2x)3-(2+3x)(-2)}{(1-2x)^2} \\
&= \frac{21(2+3x)^2}{(1-2x)^4}.
\end{align*}
\end{exercise}

\begin{exercise}
Compute the derivative of the following function:
\begin{equation*}
f(x)=\frac{\cos x}{(\tan 2x)^2}
\end{equation*}
\tcblower
The derivative is:
\begin{align*}
f'(x) &= \left( \frac{\cos x}{(\tan 2x)^2} \right)' \\
&= \left( \frac{\cos x (\cos 2x)^2 - (\sin 2x)^2 \cos x}{(\cos 2x)^4} \right)' \\
&\quad = \frac{(-\sin x)(\cos 2x)^2 + (\cos x)4\cos 2x (-\sin 2x)}{(\cos 2x)^4} \\
&\quad - \frac{\cos x (\cos 2x)^2 4\sin 2x \cos 2x \{(\sin 2x)^4\}}{(\cos 2x)^8} \\
&\quad = -\frac{\cos(2x) [\sin x \sin 2x \cos 2x + 4\cos x (\sin 2x)^2]}{(\cos 2x)^3} \\
&\quad + 4 \frac{\cos x (\cos 2x)^2 \{(\sin 2x)^3\}}{(\cos 2x)^5} \\
&\quad = -\frac{\cos(2x) [\sin x \sin 2x \cos 2x + 4\cos x] \{(\sin 2x)^3\}}{(\cos 2x)^5}.
\end{align*}

```

```

\end{align*}
\end{exercise}

\begin{exercise}
Compute the derivative of the following function:
\begin{equation*}
f(x)=\cos((2x^2+3)^3)
\end{equation*}
\tcblower
The derivative is:
\begin{align*}
f'(x) &= \left( \cos((2x^2+3)^3) \right)' \\
&= -\sin((2x^2+3)^3) \cdot 3(2x^2+3)^2 \cdot 2 \cdot 2x \\
&= -12x(2x^2+3)^2 \sin((2x^2+3)^3).
\end{align*}
\end{exercise}

\begin{exercise}
Compute the derivative of the following function:
\begin{equation*}
f(x)=(x^2+1)\sqrt{x^4+1}
\end{equation*}
\tcblower
The derivative is:
\begin{align*}
f'(x) &= \left( (x^2+1)\sqrt{x^4+1} \right)' \\
&= 2x\sqrt{x^4+1} + \frac{2x^3(x^2+1)}{\sqrt{x^4+1}}.
\end{align*}
\end{exercise}

\tcbstoprecording

```

**Exercise 8.1:** Compute the derivative of the following function:

$$f(x) = \sin((\sin x)^2)$$

*Solution on page 155*

**Exercise 8.2:** It holds:

$$\frac{d}{dx} (\ln x) = \frac{1}{x}.$$

**Exercise 8.3:** Compute the derivative of the following function:

$$f(x) = (\sin(\sin x))^2$$

*Solution on page 155*

**Exercise 8.4:** Compute the derivative of the following function:

$$f(x) = \sqrt{x^3 - 6x^2 + 2x}$$

*Solution on page 155*

**Exercise 8.5:** Compute the derivative of the following function:

$$f(x) = \left( \frac{2+3x}{1-2x} \right)^3$$

*Solution on page 156*

**Exercise 8.6:** Compute the derivative of the following function:

$$f(x) = \frac{\cos x}{(\tan 2x)^2}$$

*Solution on page 156*

**Exercise 8.7:** Compute the derivative of the following function:

$$f(x) = \cos((2x^2 + 3)^3)$$

*Solution on page 156*

**Exercise 8.8:** Compute the derivative of the following function:

$$f(x) = (x^2 + 1)\sqrt{x^4 + 1}$$

*Solution on page 156*

## 8.4 Example: Solutions

This concludes the example given in 8.3 on page 152. Now, the saved and recorded solutions are included.

\tcbinputrecords

### Solution of Exercise 8.1 on page 154:

The derivative is:

$$f'(x) = (\sin((\sin x)^2))' = \cos((\sin x)^2)2 \sin x \cos x.$$

### Solution of Exercise 8.3 on page 154:

The derivative is:

$$f'(x) = ((\sin(\sin x))^2)' = 2 \sin(\sin x) \cos(\sin x) \cos x.$$

### Solution of Exercise 8.4 on page 154:

The derivative is:

$$f'(x) = (\sqrt{x^3 - 6x^2 + 2x})' = \frac{3x^2 - 12x + 2}{2\sqrt{x^3 - 6x^2 + 2x}}.$$

**Solution of Exercise 8.5 on page 155:**

The derivative is:

$$f'(x) = \left( \left( \frac{2+3x}{1-2x} \right)^3 \right)' = 3 \left( \frac{2+3x}{1-2x} \right)^2 \frac{(1-2x)3 - (2+3x)(-2)}{(1-2x)^2} = \frac{21(2+3x)^2}{(1-2x)^4}.$$

**Solution of Exercise 8.6 on page 155:**

The derivative is:

$$\begin{aligned} f'(x) &= \left( \frac{\cos x}{(\tan 2x)^2} \right)' = \left( \frac{\cos x (\cos 2x)^2}{(\sin 2x)^2} \right)' \\ &= \frac{(\sin 2x)^2 [(-\sin x)(\cos 2x)^2 + (\cos x)4 \cos 2x (-\sin 2x)] - \cos x (\cos 2x)^2 4 \sin 2x \cos 2x}{(\sin 2x)^4} \\ &= -\frac{\cos(2x)[\sin x \sin 2x \cos 2x + 4 \cos x (\sin 2x)^2 + 4 \cos x (\cos 2x)^2]}{(\sin 2x)^3} \\ &= -\frac{\cos(2x)[\sin x \sin 2x \cos 2x + 4 \cos x]}{(\sin 2x)^3}. \end{aligned}$$

**Solution of Exercise 8.7 on page 155:**

The derivative is:

$$\begin{aligned} f'(x) &= \left( \cos((2x^2 + 3)^3) \right)' = -\sin((2x^2 + 3)^3) 3(2x^2 + 3)^2 2 \cdot 2x \\ &= -12x(2x^2 + 3)^2 \sin((2x^2 + 3)^3). \end{aligned}$$

**Solution of Exercise 8.8 on page 155:**

The derivative is:

$$f'(x) = \left( (x^2 + 1) \sqrt{x^4 + 1} \right)' = 2x \sqrt{x^4 + 1} + \frac{2x^3(x^2 + 1)}{\sqrt{x^4 + 1}}.$$

## 9 Technical Overview and Customization

This section provides a technical overview of the skin concept of `tcolorbox`. For most applications of `tcolorbox`, one will not need to know the bells and whistles described herein. You may proceed to 10 on page 172 where the customization options for most users are documented.

The following explanations also cover options and settings from the `LIB skins` library, see 10 on page 172.

### 9.1 Skins and Drawing Engines

From a technical point of view, a *skin* is a style definition for the appearance of a `tcolorbox`. The core package provides some additional option keys for skins but only two skins called `standard`<sup>→ P. 233</sup> and `standard jigsaw`<sup>→ P. 234</sup>. The `LIB skins` library adds several more skins. To change to a skin, only one option from the core package has to be set.

`/tcb/skin=<name>` (style, no default, initially `standard`)

Sets the current skin to `<name>`. This is a style definition which sets all the following keys, i. e. for many use cases there is nothing more to do.

```
\tcbset{colback=Salmon!50!white,colframe=FireBrick!75!black,
        width=(\linewidth-8mm)/2,before=,after=\hfill,equal height group=ske}

\begin{tcolorbox}[adjusted title=My title]
    This is my content.
\end{tcolorbox}
\begin{tcolorbox}[beamer,adjusted title=My title]
    This is my content.
\end{tcolorbox}
```

My title

This is my content.

My title

This is my content.

`/tcb/skin first=<name>` (style, no default, initially `standard`)

If the box is set to be `/tcb/breakable`<sup>→ P. 408</sup> and is broken actually, then the skin for the *first* part of the break sequence is set to `<name>`, see Subsection 19.8 on page 422. Typically, this key is set by a `/tcb/skin`.

`/tcb/skin middle=<name>` (style, no default, initially `standard`)

If the box is set to be `/tcb/breakable`<sup>→ P. 408</sup> and is broken actually, then the skin for the *middle* parts (if any) of the break sequence is set to `<name>`, see Subsection 19.8 on page 422. Typically, this key is set by a `/tcb/skin`.

`/tcb/skin last=<name>` (style, no default, initially `standard`)

If the box is set to be `/tcb/breakable`<sup>→ P. 408</sup> and is broken actually, then the skin for the *last* part of the break sequence is set to `<name>`, see Subsection 19.8 on page 422. Typically, this key is set by a `/tcb/skin`.

The skin of a `tcolorbox` is drawn by up to four *engines*. Afterwards, the text content is drawn which is not part of a skin. The four steps are:

1. The *frame* of the box, drawn by `/tcb/frame engine`.
2. The *interior* of the box. The interior of a box with title is drawn differently from a box without title. `/tcb/interior titled engine` or `/tcb/interior engine`<sup>→ P. 159</sup> is used to draw the interior.
3. The *segmentation* (line) of the box, if there is a lower part; drawn by `/tcb/segmentation engine`<sup>→ P. 159</sup>.
4. The *title area* of the box, if there is a title and `/tcb/title filled`<sup>→ P. 34</sup> is set to `true`; drawn by `/tcb/title engine`<sup>→ P. 159</sup>.

`/tcb/frame engine=<name>` (no default, initially `standard`)

Sets the *frame* drawing engine for a box to `<name>`. Typically, this key is set by a `/tcb/skin`<sup>→ P. 157</sup>. Feasible values for `<name>` are:

- `standard`: the original code from the core package,
- `path`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→ P. 172</sup>,
- `pathjigsaw`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→ P. 172</sup>,
- `pathfirst`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→ P. 172</sup>,
- `pathfirstjigsaw`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→ P. 172</sup>,
- `pathmiddle`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→ P. 172</sup>,
- `pathmiddlejigsaw`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→ P. 172</sup>,
- `pathlast`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→ P. 172</sup>,
- `pathlastjigsaw`: a `tikz` path which is controlled by `/tcb/frame style`<sup>→ P. 172</sup>,
- `freelance`: deprecated.
- `spartan`: a quite spartan code.
- `empty`: draw nothing.

`/tcb/interior titled engine=<name>` (no default, initially `standard`)

Sets the *interior* drawing engine for a titled box to `<name>`. Typically, this key is set by a `/tcb/skin`<sup>→ P. 157</sup>. Feasible values for `<name>` are:

- `standard`: the original code from the core package,
- `path`: a `tikz` path which is controlled by `/tcb/interior style`<sup>→ P. 173</sup>,
- `pathfirst`: a `tikz` path which is controlled by `/tcb/interior style`<sup>→ P. 173</sup>,
- `pathmiddle`: a `tikz` path which is controlled by `/tcb/interior style`<sup>→ P. 173</sup>,
- `pathlast`: a `tikz` path which is controlled by `/tcb/interior style`<sup>→ P. 173</sup>,
- `freelance`: deprecated.
- `spartan`: a quite spartan code.
- `empty`: draw nothing.

**/tcb/interior engine**=*<name>*

(no default, initially **standard**)

Sets the *interior* drawing engine for an untitled box to *<name>*. Typically, this key is set by a */tcb/skin*<sup>→ P. 157</sup>. Feasible values for *<name>* are:

- **standard**: the original code from the core package,
- **path**: a **tikz** path which is controlled by */tcb/interior style*<sup>→ P. 173</sup>,
- **pathfirst**: a **tikz** path which is controlled by */tcb/interior style*<sup>→ P. 173</sup>,
- **pathmiddle**: a **tikz** path which is controlled by */tcb/interior style*<sup>→ P. 173</sup>,
- **pathlast**: a **tikz** path which is controlled by */tcb/interior style*<sup>→ P. 173</sup>,
- **freelance**: deprecated.
- **spartan**: a quite spartan code.
- **empty**: draw nothing.

**/tcb/segmentation engine**=*<name>*

(no default, initially **standard**)

Sets the *segmentation* (line) drawing engine for a box to *<name>*. Typically, this key is set by a */tcb/skin*<sup>→ P. 157</sup>. Feasible values for *<name>* are:

- **standard**: the original code from the core package,
- **path**: a **tikz** path which is controlled by */tcb/segmentation style*<sup>→ P. 175</sup>,
- **freelance**: deprecated.
- **spartan**: a quite spartan code.
- **empty**: draw nothing.

**/tcb/title engine**=*<name>*

(no default, initially **standard**)

Sets the *title area* drawing engine for a titled box to *<name>*. Typically, this key is set by a */tcb/skin*<sup>→ P. 157</sup>. Feasible values for *<name>* are:

- **standard**: the original code from the core package,
- **path**: a **tikz** path which is controlled by */tcb/title style*<sup>→ P. 175</sup>,
- **pathfirst**: a **tikz** path which is controlled by */tcb/title style*<sup>→ P. 175</sup>,
- **pathmiddle**: a **tikz** path which is controlled by */tcb/title style*<sup>→ P. 175</sup>,
- **pathlast**: a **tikz** path which is controlled by */tcb/title style*<sup>→ P. 175</sup>,
- **freelance**: deprecated.
- **spartan**: a quite spartan code.
- **empty**: draw nothing.



After an engine is set to an initializing value, the resulting graphical code can be changed using code option keys, see 9.2 on page 161.

/tcb/geometry nodes=true|false

(default true, initially false)

If set to true, up to four tikz nodes are defined for a tcolorbox which are named frame, interior, segmentation, and title. These nodes describe the boundaries of the equally named parts of a tcolorbox. They are used by most engines based on TikZ. Typically, this key is set automatically by a /tcb/skin<sup>P.157</sup>.

```
\tcbset{colback=Salmon!50!white,colframe=FireBrick!75!black,
        width=(\linewidth-8mm)/2,before=,after=\hfill,equal height group=geon}

\begin{tcolorbox}[adjusted title=The title]
  The upper part.\tcblower The lower part.
\end{tcolorbox}
\begin{tcolorbox}[enhanced,adjusted title=The title,
  frame code={\path[draw=red,fill=red!25]
    (frame.south west) rectangle (frame.north east);},
  interior titled code={\path[draw=blue,fill=blue!25]
    (interior.south west) rectangle (interior.north east);},
  segmentation code={\path[draw=green,fill=green!25]
    (segmentation.south west) rectangle (segmentation.north east);},
  title code={\path[draw=black,fill=brown!75!black]
    (title.south west) rectangle (title.north east);}]
  The upper part.\tcblower The lower part.
\end{tcolorbox}
```

The title

The upper part.

The lower part.

The title

The upper part.

The lower part.

## 9.2 Code Option Keys

The following code options are applicable for all skins. The used `<graphical code>` can be any pgf code. For all skins with exception of `standard→ P. 233` and `standard jigsaw→ P. 234`, the `<graphical code>` can also be any TikZ code.

`/tcb/frame code=<graphical code>` (code, default from `standard`)

The given `<graphical code>` is used for drawing the *frame* of the box.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[enhanced,frame code={
    \foreach \n in {north east,north west,south east,south west}
        {\path [fill=red!75!black] (\interior.\n) circle (3mm); } }]
This is a \textbf{tcolorbox}.

\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a `tcolorbox`.

This is the lower part.

`/tcb/frame empty` (style, no value)

This is a shortcut for setting `/tcb/frame code` to empty. This option removes the drawing of the frame. Alternatively, use `/tcb/frame hidden→ P. 173`.

`/tcb/interior titled code=<graphical code>` (code, default from `standard`)

The given `<graphical code>` is used for drawing the *interior* of the box, if the box comes with a title.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,interior titled code={
    \path [draw=red!5!white,line width=5mm,line cap=round]
        ([xshift=3mm,yshift=-3mm]\interior.north west)
        --([xshift=-3mm,yshift=3mm]\interior.south east)
        ([xshift=3mm,yshift=3mm]\interior.south west)
        --([xshift=-3mm,yshift=-3mm]\interior.north east);}
This is a \textbf{tcolorbox}.

\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a `tcolorbox`.

This is the lower part.

`/tcb/interior titled empty` (style, no value)

This is a shortcut for setting `/tcb/interior titled code` to empty. This option removes the drawing of the untitled interior. Alternatively, use `/tcb/interior hidden→ P. 174`.

### /tcb/*interior code*=⟨graphical code⟩

(code, default from **standard**)

The given ⟨graphical code⟩ is used for drawing the *interior* of the box, if the box is without a title.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[enhanced,interior code={
  \path [draw=red!5!white,line width=5mm,line cap=round]
    ([xshift=3mm,yshift=-3mm]interior.north west)
    --([xshift=-3mm,yshift=3mm]interior.south east)
    ([xshift=3mm,yshift=3mm]interior.south west)
    --([xshift=-3mm,yshift=-3mm]interior.north east);}
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

This is a **tcolorbox**.

This is the lower part.

### /tcb/*interior empty*

(style, no value)

This is a shortcut for setting /tcb/*interior code* to empty. This option removes the drawing of the interior. Alternatively, use /tcb/*interior hidden*<sup>→P.174</sup>.

### /tcb/*segmentation code*=⟨graphical code⟩

(code, default from **standard**)

The given ⟨graphical code⟩ is used for drawing the *segmentation* area of the box.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,segmentation code={
  \path [top color=red!5!white,bottom color=red!5!white,middle color=blue]
    (segmentation.south west) rectangle (segmentation.north east);}
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

This is the lower part.

### /tcb/*segmentation empty*

(style, no value)

This is a shortcut for setting /tcb/*segmentation code* to empty. This option removes the drawing of the segmentation line. Alternatively, use /tcb/*segmentation hidden*<sup>→P.175</sup>.


/tcb/title code=<graphical code> (code, default from standard)

The given <graphical code> is used for drawing the *title* area of the box.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
coltitle=black}

\begin{tcolorbox}[enhanced,title=My title,title code={
  \path[draw=yellow,solid,decorate,line width=2mm,
    decoration={coil,aspect=0,segment length=10.1mm}]
  ([xshift=1mm]title.west) -- ([xshift=-1mm]title.east);}]
This is a \textbf{tcolorbox}.

\tcblower
This is the lower part.
\end{tcolorbox}
```

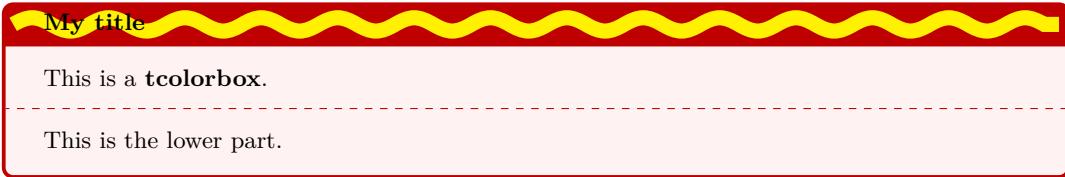

/tcb/title empty (style, no value)

This is a shortcut for setting /tcb/title code to empty. This option removes the drawing of the title area. Alternatively, use /tcb/title hidden<sup>P. 176</sup>.

### 9.3 Subskins

A subskin is a new `/tcb/skin`<sup>→ P. 157</sup> based on an existing skin which is extended or changed.

! Never use geometry settings or bounding box options inside a subskin definition! If one skin is replaced by another skin, the overall bounding box should stay constant. Especially, if a skin is used for a breakable box, unpredictable and unpleasant results could arise otherwise.  
If you want to change the geometry also, use an additional style. See the skin `beamer`<sup>→ P. 262</sup> and the style `/tcb/beamer`<sup>→ P. 262</sup> as pattern.

#### `\tcbsubskin{<name>}{<base skin>}{<options>}`

Creates a new skin `<name>` which inherits all properties of an existing `<base skin>` plus the given `<options>`. The new skin `<name>` can be used as value for the keys `/tcb/skin`<sup>→ P. 157</sup>, `/tcb/skin first`<sup>→ P. 157</sup>, `/tcb/skin middle`<sup>→ P. 157</sup>, and `/tcb/skin last`<sup>→ P. 157</sup>. As `<base skin>`, one can take `standard`<sup>→ P. 233</sup>, `empty`<sup>→ P. 269</sup>, `enhanced`<sup>→ P. 235</sup>, or any skin from the LIB skins library, see 10 on page 172.

```
% \tcbuselibrary{skins}
\tcbsubskin{mycross}{empty}{frame code={%
  \draw[red, line width=5pt] (frame.south west)--(frame.north east);
  \draw[red, line width=5pt] (frame.north west)--(frame.south east);},
  skin first=mycross,skin middle=mycross,skin last=mycross }

\begin{tcolorbox}[skin=mycross]
This is my content.
\end{tcolorbox}
```

This is my content.

#### `/tcb/skin first is subskin of=<base skin>{<options>}` (no default, initially unset)

Creates a new unnamed skin which inherits all properties of an existing `<base skin>` plus the given `<options>`. This skin is set as `/tcb/skin first`<sup>→ P. 157</sup>.

See a detailed example on page 275.

#### `/tcb/skin middle is subskin of=<base skin>{<options>}` (no default, initially unset)

Creates a new unnamed skin which inherits all properties of an existing `<base skin>` plus the given `<options>`. This skin is set as `/tcb/skin middle`<sup>→ P. 157</sup>.

See a detailed example on page 275.

#### `/tcb/skin last is subskin of=<base skin>{<options>}` (no default, initially unset)

Creates a new unnamed skin which inherits all properties of an existing `<base skin>` plus the given `<options>`. This skin is set as `/tcb/skin last`<sup>→ P. 157</sup>.

See a detailed example on page 275.


## 9.4 Drawing Scheme

Depending on the complexity of a `tcolorbox` definition, the resulting box is drawn in a more or less complex series of steps.

To document and demonstrate these drawing steps, we consider the following box definition:


```
\newtcolorbox{testbox}[1][][enhanced,title=Test Box,
  boxrule=1mm,titlerule=0.5mm,colframe=blue!50!black,
  interior style={top color=blue!20!green!50!white,bottom color=blue!20!yellow!50!white},
  colbacktitle=blue!50!green!90!white,segmentation style={solid},
  fonttitle=\bfseries,drop fuzzy shadow,borderline={0.3mm}{0.35mm}{yellow!50!white},
  underlay={\path[fill image opacity=0.15,fill image scale=0.9,
    fill stretch picture={\draw[blue,line width=2mm] circle (1);}]
    (interior.south west) rectangle (interior.north east);},
  watermark text={Watermark},watermark color={green!20!white},
  finish={\begin{tcbclipframe}
    \path[bottom color=black,top color=black!50!white,opacity=0.1]
      (frame.south west) -- (frame.south east) -- (frame.north east) -- cycle;
    \path[top color=white,bottom color=black!50!white,opacity=0.1]
      (frame.south west) -- (frame.north east) -- (frame.north west) -- cycle;
  \end{tcbclipframe}},#1}
```

For this definition, we get the maximal number of drawing steps:

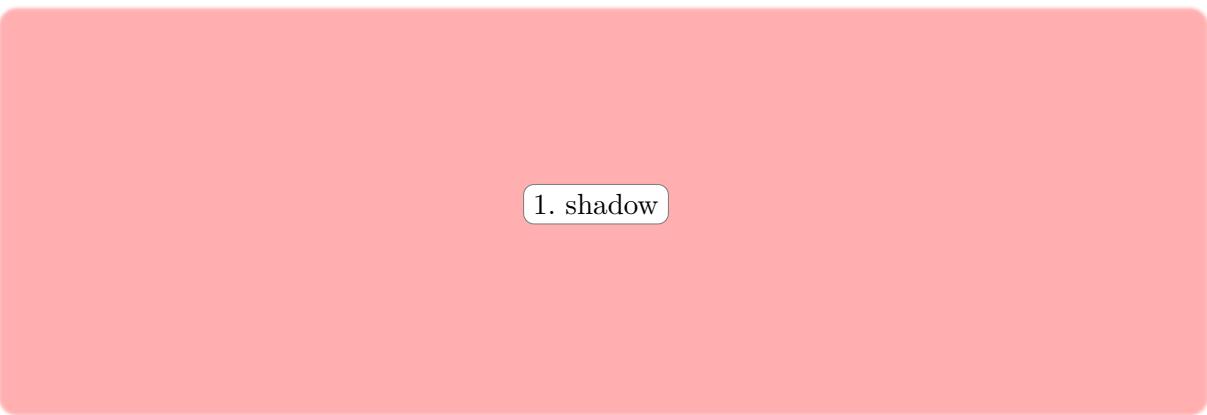

1. shadow

- Section 10.6 on page 208.

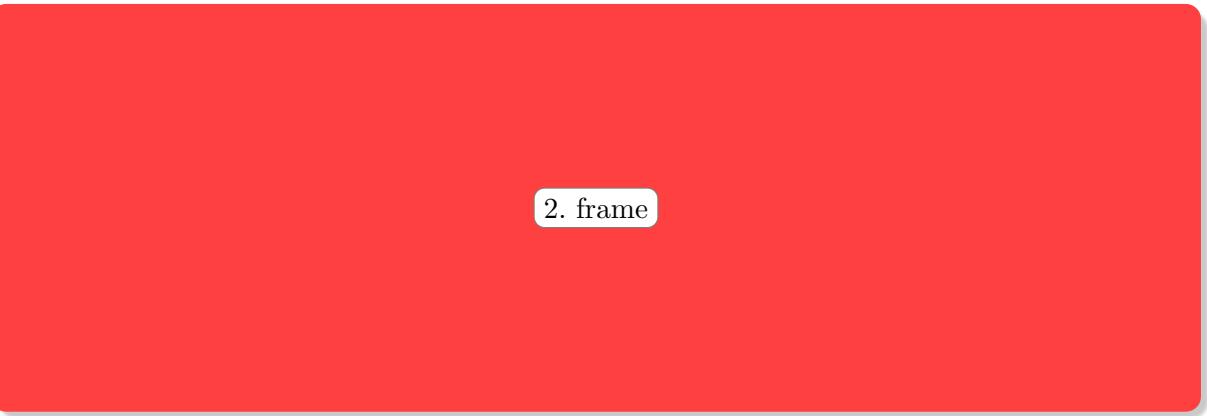

2. frame

- `/tcb/colframe`<sup>→ P. 34</sup>, `/tcb/opacityframe`<sup>→ P. 58</sup>
- `/tcb/frame code`<sup>→ P. 161</sup>
- `/tcb/frame style`<sup>→ P. 172</sup>

### 3. interior


- `/tcb/colback`<sup>→ P. 34</sup>, `/tcb-opacityback`<sup>→ P. 58</sup>
- `/tcb/interior code`<sup>→ P. 162</sup>, `/tcb/interior titled code`<sup>→ P. 161</sup>
- `/tcb/interior style`<sup>→ P. 173</sup>

### 4. title area

- `/tcb/colbacktitle`<sup>→ P. 34</sup>, `/tcb-opacitybacktitle`<sup>→ P. 58</sup>
- `/tcb/title code`<sup>→ P. 163</sup>
- `/tcb/title style`<sup>→ P. 175</sup>


### 5. segmentation

- `/tcb/lower separated`<sup>→ P. 32</sup>
- `/tcb/segmentation code`<sup>→ P. 162</sup>
- `/tcb/segmentation style`<sup>→ P. 175</sup>

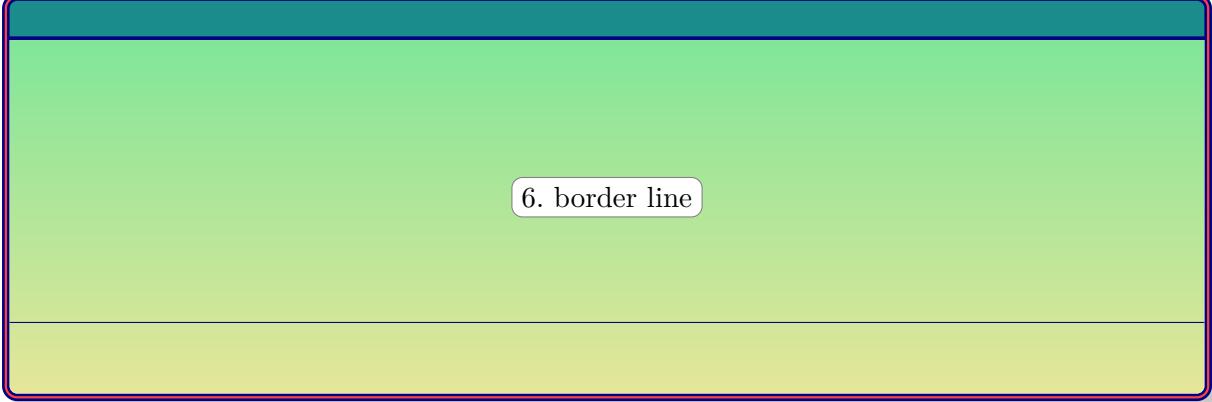


6. border line

- 10.5 on page 203

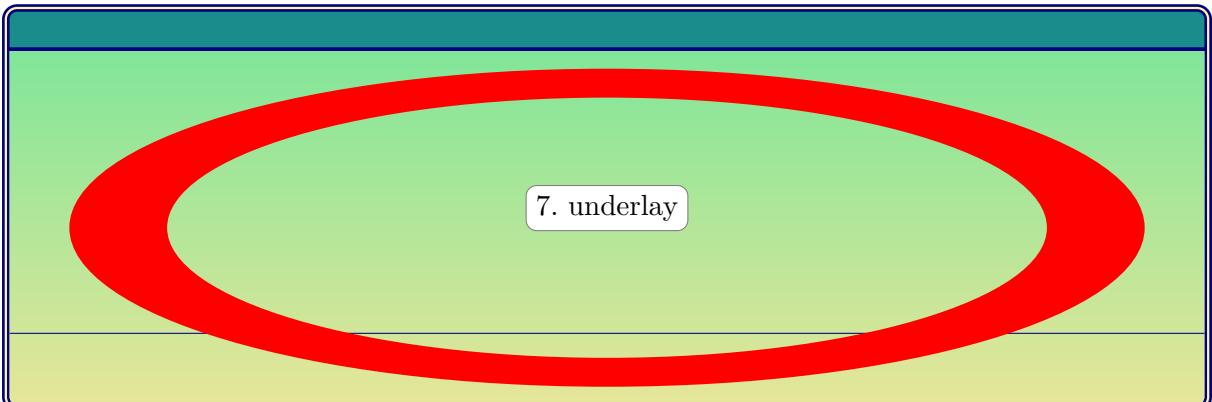

7. underlay

- 10.2 on page 180
- 10.8 on page 221

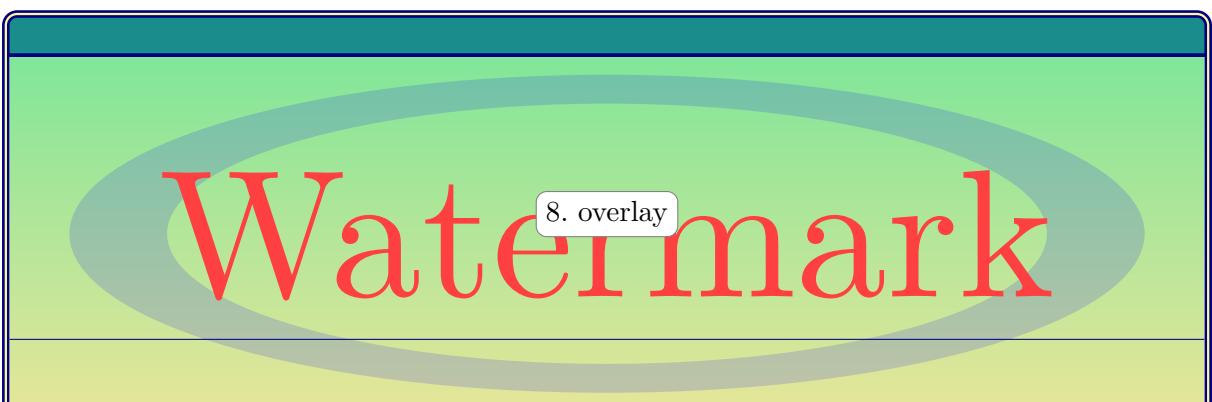

8. overlay

- 4.12 on page 83
- 10.3 on page 191

### Test Box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. 9. text content Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### Lower part

- `/tcb/colupper→ P. 35`, `/tcb/collower→ P. 35`, `/tcb/coltitle→ P. 35`
- `/tcb/fontupper→ P. 36`, `/tcb/fontlower→ P. 36`, `/tcb/fonttitle→ P. 36`
- `/tcb-opacityupper→ P. 59`, `/tcb-opacitylower→ P. 59`, `/tcb-opacitytitle→ P. 59`

### Test Box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. 10. finish Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### Lower part

- 10.9 on page 223

All together, the box is drawn:

```
% \usepackage{lipsum}
\begin{testbox}
\lipsum[2]
\tcblower
Lower part
\end{testbox}
```

### Test Box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### Lower part


## 9.5 Color Names

Color settings for a `tcolorbox` are saved into named colors which may be used inside a box, e.g. for an overlay. These color names are

- `tcbcolframe` set by `/tcb/colframe`<sup>→ P. 34</sup> (frame color)
- `tcbcolback` set by `/tcb/colback`<sup>→ P. 34</sup> (background color)
- `tcbcolbacktitle` set by `/tcb/colbacktitle`<sup>→ P. 34</sup> (background color of the title)
- `tcbcolbacklower` set by `/tcb/colbacklower`<sup>→ P. 249</sup> (skin dependent background color of the lower part; needs  skins to be loaded)
- `tcbcolupper` set by `/tcb/colupper`<sup>→ P. 35</sup> (text color upper part)
- `tcbcollower` set by `/tcb/collower`<sup>→ P. 35</sup> (text color lower part)
- `tcbcoltitle` set by `/tcb/coltitle`<sup>→ P. 35</sup> (text color title)

```
% \tcbsuselibrary{skins}
\begin{tcolorbox}[title=Color names,
    colframe=blue!50!black,colback=blue!5,
    colbacktitle=blue!50,colupper=red!35!black]
\foreach \name in {tcbcolframe,tcbcolback,tcbcolbacktitle,tcbcolbacklower,
    tcbcolupper,tcbcollower,tcbcoltitle}
{\tikz\path[draw,fill=\name]
(0,0) rectangle node[right=4mm,font=\ttfamily]{\name} (0.8,0.8);\par}
\end{tcolorbox}
```

Color names

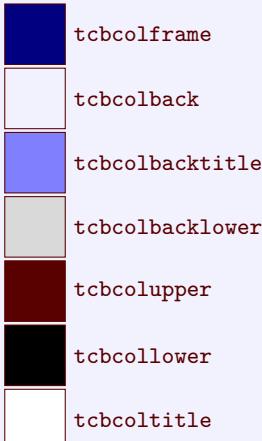

## 9.6 Useful Properties

The following macros describe certain *properties* which may be used for the drawing scheme, see Section 9.4 on page 165. Sometimes, they are even available inside the box content. All of them are considered to be *read-only* and should never be redefined by the user.

N 2016-02-16

### \tcbheightspace

If the height of a `tcolorbox` is not the natural height, the space difference between the forced and the natural size is hold by `\tcbheightspace`. This macro is not usable inside the box content, but for skins or inside `/tcb/underlay`<sup>→ P. 221</sup>, `/tcb/overlay`<sup>→ P. 83</sup>, etc. If such a space information is needed inside the box content, see `/tcb/space to`<sup>→ P. 66</sup> instead.

```
% \tcbuselibrary{skins}
\newtcolorbox{testbox}[2][][enhanced,size=fbox,
  colframe=blue!75!black,colback=white,height=#2,
  underlay={\node[above,inner sep=3pt] at (interior.south){%
    \includegraphics[width=\tcbtextwidth,height=\tcbheightspace-3pt]{goldshade.png}}};
  },
#1}
\begin{testbox}{3cm}
  This is my box. The space is filled with a picture.
\end{testbox}
\begin{testbox}{2cm}
  This is my box. The space is filled with a picture.
\end{testbox}
```

This is my box. The space is filled with a picture.



This is my box. The space is filled with a picture.



N 2016-02-16

### \tcbtextwidth

This property describes the box content width.

- If there also is a lower part, it describes the width of the upper part.
- For `/tcb/sidebyside`<sup>→ P. 138</sup> boxes, it describes the combined text width plus segmentation.
- This property can be used inside the box content text with exception of `/tcb/fit`<sup>→ P. 462</sup> boxes.
- `\tcbtextwidth` can be used for all box types for skins or inside `/tcb/underlay`<sup>→ P. 221</sup>, `/tcb/overlay`<sup>→ P. 83</sup>, etc.

```
\begin{tcolorbox}[colframe=blue!75!black]
  Inside a box: \tcbtextwidth\ (=the\linewidth).
\end{tcolorbox}
```

Inside a box: 370.74823pt (=370.74823pt).

## \tcbtextheight

This property describes the designated box content height. If the box is larger than the natural height, the actual content will be smaller than \tcbtextheight.

- For boxes with a fixed /tcb/height<sup>P.60</sup>, this property can be used inside the box content text. For other boxes, it denotes 0pt inside the box content.
- \tcbtextheight can be used for all box types for skins or inside /tcb/underlay<sup>P.221</sup>, /tcb/overlay<sup>P.83</sup>, etc.

```
% \tcbselibrary{skins}
\begin{tcolorbox}[enhanced,colframe=blue!75!black,
    underlay={\node[left,red] at (frame.east) {Here: \tcbtextheight};}]
Inside a box with natural height: \tcbtextheight.
\end{tcolorbox}
\begin{tcolorbox}[enhanced,colframe=blue!75!black,height=1cm,
    underlay={\node[left,red] at (frame.east) {Here: \tcbtextheight};}]
Inside a box with fixed height: \tcbtextheight.
\end{tcolorbox}
```

Inside a box with natural height: 0pt

Here: 7.95pt

Inside a box with fixed height: 8.5359pt.

Here: 8.5359pt

## \tcbsegmentstate

This macro contains 0, 1, or 2. It is set for every unbroken box and every broken partial box with the following meaning:

- **0**: The current (partial) box contains only an upper part.
- **1**: The current (partial) box contains an upper and a lower part. The segmentation node can be used for positioning.
- **2**: The current (partial) box contains only a lower part. This can only be true for parts of breakable boxes.

Skins like bicolor<sup>P.247</sup> use this property to paint the (partial) boxes.

```
% \tcbselibrary{skins,raster}
\begin{tcbbraster}[raster equal height,enhanced,
    watermark text=\tcbsegmentstate]
\begin{tcolorbox}Upper part\end{tcolorbox}
\begin{tcolorbox}Upper part\tcblower Lower part\end{tcolorbox}
\end{tcbbraster}
```

Upper part

0

Upper part

1

Lower part

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{skins}
```

This also loads the package `tikzfill.image`<sup>→ CTAN</sup>.

In the following, general settings and options of the library are documented. The actual catalog of skins is found in 11 on page 231.

### 10.1 Style Option Keys


The following style options are applicable for all skins which use engines of type `path`, `pathfirst`, `pathmiddle`, or `pathlast`. Especially, the skin `enhanced`<sup>→ P. 235</sup> supports *all* of them and `standard`<sup>→ P. 233</sup> `none`.

`/tcb/frame style=<tikz keys>` (style, no default)

The `<tikz keys>` are used inside the `tikz` path command for drawing the *frame* of the box. This option is available if the `/tcb/frame engine`<sup>→ P. 158</sup> is set to `path`, `pathfirst`, `pathmiddle`, or `pathlast`. It is *not* available for `standard`.

```
\tcbset{colback=red!5!white,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
  frame style={left color=red!75!black,
    right color=blue!75!black}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```




`/tcb/frame style image=<file name>` (no default, initially unset)

Fills the frame with an external image referenced by `<file name>`.

```
\tcbset{colback=red!5!white,fonttitle=\bfseries}


\begin{tcolorbox}[enhanced,title=My title,
  frame style image=blueshade.png]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```



/tcb/frame style tile={⟨graphics options⟩}{⟨file name⟩} (no default, initially unset)

Fills the frame with a tile pattern based on an external image referenced by ⟨file name⟩. The ⟨graphics options⟩ are given to the underlying `\includegraphics` command.


```
\tcbset{colback=red!5!white,coltitle=red!30!black,  
       opacityback=0.75,fonttitle=\bfseries}  
  
\begin{tcolorbox}[enhanced,title=My title,  
                 frame style tile={width=1cm}{pink_marble.png}]  
This is a \textbf{tcolorbox}.  
\tcblower  
This is the lower part.  
\end{tcolorbox}
```



/tcb/frame hidden (style, no value)

This is a shortcut for `frame style={draw=none,fill=none}`. Depending on the skin, this option switches off the drawing of the frame. Alternatively, use /tcb/frame empty<sup>→ P. 161</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,  
       fonttitle=\bfseries,coltitle=black}  
  
\begin{tcolorbox}[enhanced,title=My title,  
                 frame hidden]  
This is a \textbf{tcolorbox}.  
\tcblower  
This is the lower part.  
\end{tcolorbox}
```




/tcb/interior style=⟨tikz keys⟩ (style, no default)

The ⟨tikz keys⟩ are used inside the `tikz path` command for drawing the *interior* of the box. They are used for the titled and for the untitled version as well.

This option is available if the /tcb/interior titled engine<sup>→ P. 158</sup> or /tcb/interior engine<sup>→ P. 159</sup> is set to `path`, `pathfirst`, `pathmiddle`, or `pathlast`. It is *not* available for `standard`.

```
\tcbset{colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[enhanced,title=My title,  
                interior style={left color=red!20!white,  
                               right color=yellow!50!white}]  
This is a \textbf{tcolorbox}.  
\tcblower  
This is the lower part.  
\end{tcolorbox}
```



/tcb/*interior style image*=⟨file name⟩

(no default, initially unset)

Fills the interior with an external image referenced by ⟨file name⟩.

```
\tcbset{colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
    interior style image=goldshade.png]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

This is the lower part.

/tcb/*interior style tile*={⟨graphics options⟩}{⟨file name⟩} (no default, initially unset)

Fills the interior with a tile pattern based on an external image referenced by ⟨file name⟩. The ⟨graphics options⟩ are given to the underlying `\includegraphics` command.

```
\tcbset{colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
    interior style tile={width=2cm}{crinklepaper.png}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

This is the lower part.

/tcb/*interior hidden*

(style, no value)

This is a shortcut for `interior style={draw=none,fill=none}`. Depending on the skin, this option switches off the drawing of the interior. Alternatively, use /tcb/*interior empty*<sup>→ P. 162</sup> and/or /tcb/*interior titled empty*<sup>→ P. 161</sup>.

```
\tcbset{frame style={top color=red!20!white,
    bottom color=red!20!white!75!black},
    fonttitle=\bfseries,coltitle=black}

\begin{tcolorbox}[enhanced,title=My title,
    interior hidden]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

This is the lower part.

### /tcb/segmentation style=<tikz keys>

(style, no default)

The `<tikz keys>` are used inside the `tikz` path command for drawing the *segmentation* line of the box.

This option is available if the `/tcb/segmentation engine` <sup>→ P. 159</sup> is set to `path`. It is *not* available for `standard`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
        fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
    segmentation style={double=white,draw=blue,
        double distance=1pt,solid}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

This is the lower part.

### /tcb/segmentation hidden

(style, no value)

This is a shortcut for `segmentation style={draw=none,fill=none}`. Depending on the skin, this option switches off the drawing of the segmentation line. See also `/tcb/lower separated` <sup>→ P. 32</sup> which has the same effect for most skins. Alternatively, use `/tcb/segmentation empty` <sup>→ P. 162</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
        fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,
    enhanced,segmentation hidden]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

This is the lower part.

### /tcb/title style=<tikz keys>

(style, no default)

The `<tikz keys>` are used inside the `tikz` path command for drawing the *title area* of the box.

This option is available if the `/tcb/title engine` <sup>→ P. 159</sup> is set to `path`, `pathfirst`, `pathmiddle`, or `pathlast`. It is *not* available for `standard`.

```
\tcbset{colback=red!5!white,colframe=red!75!black,
        coltitle=blue!50!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
    title style={left color=blue!15!yellow,
        right color=red!85!black}]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.


This is the lower part.

/tcb/title style image=⟨file name⟩

(no default, initially unset)

Fills the title area with an external image referenced by ⟨file name⟩.

```
\tcbset{colback=blue!5!white,colframe=blue!75!black,  
fonttitle=\bfseries}  
  
\begin{tcolorbox}[enhanced,title=My title,  
title style image=blueshade.png]  
This is a \textbf{tcolorbox}.  
\tcblower  
This is the lower part.  
\end{tcolorbox}
```




/tcb/title style tile=⟨graphics options⟩{⟨file name⟩}

(no default, initially unset)

Fills the title area with a tile pattern based on an external image referenced by ⟨file name⟩. The ⟨graphics options⟩ are given to the underlying `\includegraphics` command.

```
\tcbset{colback=red!5!white,colframe=red!75!black,  
coltitle=blue!50!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[enhanced,title=My title,  
title style tile={width=1cm}{pink_marble.png}]  
This is a \textbf{tcolorbox}.  
\tcblower  
This is the lower part.  
\end{tcolorbox}
```




/tcb/title hidden

(style, no value)

This is a shortcut for `title style={draw=none,fill=none}`. Depending on the skin, this option switches off the drawing of the title background. See also /tcb/title filled<sup>→ P. 34</sup> for a similar effect. Alternatively, use /tcb/title empty<sup>→ P. 163</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,  
fonttitle=\bfseries}  
  
\begin{tcolorbox}[title=My title,  
enhanced,title hidden]  
This is a \textbf{tcolorbox}.  
\tcblower  
This is the lower part.  
\end{tcolorbox}
```



The `<tikz keys>` are used to draw a title rule, i.e. a rule below the optional title. The width of the rule is controlled by `/tcb/titlerule`<sup>→ P. 43</sup>. It may be set directly to a smaller width to create mixed effects with the standard rule. This option is implemented as an `/tcb/underlay`<sup>→ P. 221</sup>. Thus, it is not available for `standard`<sup>→ P. 233</sup> and `standard jigsaw`<sup>→ P. 234</sup>, but for all other skins, e.g. `enhanced`<sup>→ P. 235</sup>. As an underlay, this option can be used multiple times and is removed by `/tcb/no underlay`<sup>→ P. 221</sup>.

```
\begin{tcolorbox}[enhanced,
  colback=red!5!white,colframe=red!75!black,
  colbacktitle=red!50!yellow,fonttitle=\bfseries,
  title=My title,
  titlerule=1mm,
  titlerule style=yellow ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

```
\begin{tcolorbox}[enhanced,
  colback=red!5!white,colframe=red!75!black,
  colbacktitle=red!50!yellow,fonttitle=\bfseries,
  title=My title,
  titlerule=1mm,
  titlerule style={yellow,line width=0.5mm} ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

```
\begin{tcolorbox}[enhanced,
  colback=red!10!white,colframe=red!75!black,
  colbacktitle=red!50!yellow,fonttitle=\bfseries,
  frame hidden,
  title=My title,
  boxrule=0pt,titlerule=1mm,
  titlerule style=red!50!black ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

```
%\usetikzlibrary{arrows.meta}
\begin{tcolorbox}[empty,
  coltitle=red!75!black,fonttitle=\bfseries,
  borderline horizontal={0.5mm}{0pt}{red!50!white},
  title=My title,
  titlerule style={red,
    arrows = {Hooks[arc=270]-Hooks[arc=270]}} ]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

The combined TikZ style applied to frame, interior, and title background can be used by authors in customizing code.


#### /tikz/tcb fill frame

(style, no value)

This is a TikZ style which is finally applied to the *frame* of the box.

```
% \tcbuselibrary{hooks}
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
frame code app={\path[tcb fill frame]
([yshift=-2mm]frame.north)
circle (8mm); } }

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```




#### /tikz/tcb fill interior

(style, no value)

This is a TikZ style which is finally applied to the *interior* of the box.

```
% \tcbuselibrary{hooks}
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
interior titled code app={\path[tcb fill interior]
([yshift=-0.1pt]interior.north east)
--([yshift=3pt]interior.north)
--([yshift=-0.1pt]interior.north west)
--cycle; } }

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```




#### /tikz/tcb fill title

(style, no value)

This is a TikZ style which is finally applied to the *title area* of the box.

```
% \tcbuselibrary{hooks}
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries,
colbacktitle=blue!75!black,
title code app={\path[tcb fill title]
(title) circle (5mm); } }

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```



This is a TikZ style which is finally applied to the *interior lower part* of the box, when the `bicolor→ P. 247` skin is used.

```
% \tcbuselibrary{hooks}
% \usetikzlibrary{decorations.pathmorphing}
\tcbset{bicolor,colback=red!5!white,
colbacklower=blue!15!white,
colframe=red!75!black,fonttitle=\bfseries,
segmentation code app={%
\path[tcb fill lower bicolor,
decoration={zigzag,amplitude=1mm}]
decorate {
([yshift=-0.1pt]segmentation.east)
--([yshift=-0.1pt]segmentation.west) }
--cycle;} }

\begin{tcolorbox}[title=My title]
This is a \textbf{tcolorbox}.
\tcblower
This is the lower part.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

This is the lower part.

## 10.2 Boxed Title Option Keys

### 10.2.1 Boxed Title Placement

The following options place the title text into an own `\tcbox`<sup>P.14</sup>. This boxed title can be customized independently from the main box using `/tcb/boxed title style`<sup>P.185</sup>. The placement can be influenced by `\begin{tcolorbox}[enhanced,title=My title, attach boxed title to top left]`.

`/tcb/attach boxed title to top left={\langle boxtyle options\rangle}` (style, default empty)

The title is boxed with a `\tcbox`<sup>P.14</sup> and attached to the top left corner of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top left]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title  
This is a **tcolorbox**.

N 2021-07-30

`/tcb/attach boxed title to top text left={\langle boxtyle options\rangle}` (style, default empty)

The title is boxed with a `\tcbox`<sup>P.14</sup> and attached to the top left corner of the main box and shifted to match title text and box text.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top text left]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title  
This is a **tcolorbox**.

`/tcb/attach boxed title to top center={\langle boxtyle options\rangle}` (style, default empty)

The title is boxed with a `\tcbox`<sup>P.14</sup> and attached to the top of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top center]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title  
This is a **tcolorbox**.

N 2021-07-30

`/tcb/attach boxed title to top text right={\langle boxtyle options\rangle}` (style, default empty)

The title is boxed with a `\tcbox`<sup>P.14</sup> and attached to the top right corner of the main box and shifted to match title text and box text.

```
\begin{tcolorbox}[enhanced,title=My title,
  align=right,
  attach boxed title to top text right]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title  
This is a **tcolorbox**.

`/tcb/attach boxed title to top right={\langle boxtyle options\rangle}` (style, default empty)

The title is boxed with a `\tcbox`<sup>P.14</sup> and attached to the top right corner of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,
  align=right,
  attach boxed title to top right]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title  
This is a **tcolorbox**.

`/tcb/attach boxed title to bottom left={⟨boxtitle options⟩}` (style, default empty)

The title is boxed with a  $\text{\tcbox}^{\rightarrow \text{P.14}}$  and attached to the bottom left corner of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,  
attach boxed title to bottom left]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

N 2021-07-30

`/tcb/attach boxed title to bottom text left={⟨boxtitle options⟩}` (style, default empty)

The title is boxed with a  $\text{\tcbox}^{\rightarrow \text{P.14}}$  and attached to the bottom left corner of the main box and shifted to match title text and box text. Note that this matches the *upper* part, even, if there is a *lower* part.

```
\begin{tcolorbox}[enhanced,title=My title,  
attach boxed title to bottom text left]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

`/tcb/attach boxed title to bottom center={⟨boxtitle options⟩}` (style, default empty)

The title is boxed with a  $\text{\tcbox}^{\rightarrow \text{P.14}}$  and attached to the bottom of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,  
attach boxed title to bottom center]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

N 2021-07-30

`/tcb/attach boxed title to bottom text right={⟨boxtitle options⟩}` (style, default empty)

The title is boxed with a  $\text{\tcbox}^{\rightarrow \text{P.14}}$  and attached to the bottom right corner of the main box and shifted to match title text and box text. Note that this matches the *upper* part, even, if there is a *lower* part.

```
\begin{tcolorbox}[enhanced,title=My title,  
halign=right,  
attach boxed title to bottom text right]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

`/tcb/attach boxed title to bottom right={⟨boxtitle options⟩}` (style, default empty)

The title is boxed with a  $\text{\tcbox}^{\rightarrow \text{P.14}}$  and attached to the bottom right corner of the main box.

```
\begin{tcolorbox}[enhanced,title=My title,  
attach boxed title to bottom right]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

N 2016-02-26

`/tcb/attach boxed title to top={⟨boxtitle options⟩}` (style, default empty)

This is a convenient style to mimic a standard title. It uses `/tcb/attach boxed title to top center`<sup>→ P. 180</sup>, `/tcb/minipage boxed title`<sup>→ P. 189</sup>, and sizes the boxed title to match the base box.

```
\begin{tcolorbox}[enhanced,title=My title,  
attach boxed title to top,  
boxed title style={colframe=red}]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

N 2016-02-26

`/tcb/attach boxed title to top*={⟨boxtitle options⟩}` (style, default empty)

In contrast to `/tcb/attach boxed title to top`, this style uses smaller left and right rules to avoid previewer glitches. Typically, one would not use different colors for the frame as in the example below.

```
\begin{tcolorbox}[enhanced,title=My title,  
attach boxed title to top*,  
boxed title style={colframe=red}]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

N 2016-02-26

`/tcb/attach boxed title to bottom={⟨boxtitle options⟩}` (style, default empty)

This is a convenient style to produce a standard-like title at the bottom of the box. It uses `/tcb/attach boxed title to bottom center`<sup>→ P. 181</sup>, `/tcb/minipage boxed title`<sup>→ P. 189</sup>, and sizes the boxed title to match the base box.

```
\begin{tcolorbox}[enhanced,title=My title,  
attach boxed title to bottom,  
boxed title style={colframe=red}]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

N 2016-02-26

`/tcb/attach boxed title to bottom*={⟨boxtitle options⟩}` (style, default empty)

In contrast to `/tcb/attach boxed title to top`, this style uses smaller left and right rules to avoid previewer glitches.

```
\begin{tcolorbox}[enhanced,title=My title,  
attach boxed title to bottom*]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

N 2016-02-26

`/tcb/flip title={⟨options⟩}` (style, default empty)

This style combines `/tcb/attach boxed title to bottom*` with `/tcb/boxed title style`<sup>→ P. 185</sup>. The `⟨options⟩` are given to `/tcb/boxed title style`<sup>→ P. 185</sup>.

```
\begin{tcolorbox}[tile,flip title={sharp corners},  
title=My title,colback=red!10,  
colbacktitle=red!75!black]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

My title

### 10.2.2 Options for the Boxed Title Placement

The `\tcbboxtitle` options of the keys described above are shift values. The dimensions of the boxed title are stored into two macros `\tcboxedtitleheight` and `\tcboxedtitlewidth`. These macros can be used inside the following `\tcbboxtitle` options:

`/tcb/boxtitle/xshift=<length>` (no default, initially 0pt)

The boxed title is shifted by `<length>` in the horizontal direction.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top left={xshift=-2mm},
  boxed title style={size=small,colback=blue}]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/boxtitle/yshift=<length>` (no default, initially 0pt)

The boxed title is shifted by `<length>` in the vertical direction.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top center=
    {yshift=-\tcboxedtitleheight/2},
  boxed title style={size=small,colback=blue}]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/boxtitle/yshifttext=<length>` (no default, initially 0pt)

The text inside the main box is shifted by `<length>` to give room for e.g. a sunken title.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top center=
    {yshift=-3mm,yshifttext=-1mm},
  boxed title style={size=small,colback=blue}]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

`/tcb/boxtitle/yshift*=<length>` (no default, initially 0pt)

Sets `/tcb/boxtitle/yshift` and `/tcb/boxtitle/yshifttext` the same time.

`/tcb/boxtitle/yshifttext` is only set if necessary.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top center={yshift*=-3mm},
  boxed title style={size=small,colback=blue}]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.



The bounding box of the resulting total **tcolorbox** is adapted automatically to the *vertical* dimensions of the boxed title. Possible horizontal enlargements are *not* automatically computed.

```
\begin{tcolorbox}[enhanced,title=My title,
  attach boxed title to top left=
    {xshift=-2mm,yshift=-2mm},
  boxed title style={size=small,colback=blue},
  show bounding box]
  This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

### 10.2.3 Options for the Boxed Title Box



The boxed title options are implemented as an underlay, see 10.8 on page 221. Therefore, a boxed title is not drawn, if a skin does not support underlays like `standard`<sup>P. 233</sup>. Still, the room for the boxed titles gets reserved in these cases.



A TikZ node `title` is produced by a boxed title which can be used inside `/tcb/frame code`<sup>P. 161</sup>, `/tcb/interior code`<sup>P. 162</sup>, underlays, overlays, and finishes.



A boxed title is almost always the first underlay. The only exceptions are underlays defined by `/tcb/underlay boxed title`<sup>P. 222</sup> which are drawn before. Additionally, underlays defined by `/tcb/underlay boxed title`<sup>P. 222</sup> are only drawn, if a boxed title is actually set. They are ignored, if there is no boxed title.


N 2016-02-26

`/tcb/boxed title size=<size>` (no default, initially `title`)

This setting defines the basic size for the title box. Further settings can be applied using `/tcb/boxed title style`<sup>P. 185</sup>. Feasible values for `<size>` are:

- `title`: Sets the size according to `/tcb/size`<sup>P. 51</sup>=`title`.
- `standard`: No size setting. Typically, this is identical to `/tcb/size`<sup>P. 51</sup>=`normal`.
- `copy`: The size values for a title of the base box are copied for the title box.

```
% \tcbuselibrary{raster}
\begin{tcbraster}[raster columns=3,enhanced,boxrule=0.4pt,
    title=My title,attach boxed title to top center]
\begin{tcolorbox}[boxed title size=title]
    This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[boxed title size=standard]
    This is a \textbf{tcolorbox}.
\end{tcolorbox}
\begin{tcolorbox}[boxed title size=copy]
    This is a \textbf{tcolorbox}.
\end{tcolorbox}
\end{tcbraster}
```

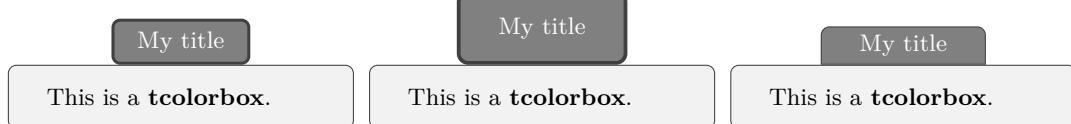

By default, a boxed title is dimensioned with /tcb/size<sup>→ P. 51</sup>=title and inherits the /tcb/skin<sup>→ P. 157</sup> and /tcb/colframe<sup>→ P. 34</sup> of the main box. Also, the /tcb/colback<sup>→ P. 34</sup> is inherited from the main /tcb/colbacktitle<sup>→ P. 34</sup>. Font and color of the title text are set as usual. All other <options> are set by the /tcb/boxed title style key. Since a boxed title is set by \tcbbox<sup>→ P. 14</sup>, all tcolorbox options are applicable here. If /tcb/boxed title style is used several times, the <options> are appended.

```
\begin{tcolorbox}[enhanced,title=My title,
fonttitle=\bfseries,coltitle=green!25!black,
attach boxed title to top center=
{yshift=-2mm,yshifttext=-1mm},
boxed title style={colframe=green!75!black,
colback=yellow!50!green}]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

```
\begin{tcolorbox}[enhanced,title=My title,
colframe=red!50!black,colback=red!10!white,
arc=1mm,colbacktitle=red!10!white,
fonttitle=\bfseries,coltitle=red!50!black,
attach boxed title to top text left=
{yshift=-0.50mm},
boxed title style={skin=enhancedfirst jigsaw,
size=small,arc=1mm,bottom=-1mm,
interior style={fill=None,
top color=red!30!white,
bottom color=red!20!white}}]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

My title

This is a **tcolorbox**.

```
\begin{tcolorbox}[enhanced,title=My title,
colframe=blue!50!black,colback=blue!10!white,colbacktitle=blue!5!yellow!10!white,
fonttitle=\bfseries,coltitle=black,attach boxed title to top center=
{yshift=-0.25mm-\tcbboxedtitleheight/2,yshifttext=2mm-\tcbboxedtitleheight/2},
boxed title style={boxrule=0.5mm,
frame code={ \path[tcb fill frame] ([xshift=-4mm]frame.west)
-- (frame.north west) -- (frame.north east) -- ([xshift=4mm]frame.east)
-- (frame.south east) -- (frame.south west) -- cycle; },
interior code={ \path[tcb fill interior] ([xshift=-2mm]interior.west)
-- (interior.north west) -- (interior.north east)
-- ([xshift=2mm]interior.east) -- (interior.south east) -- (interior.south west)
-- cycle; } }
\lipsum[2]
\end{tcolorbox}
```

My title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
% \usepackage{varwidth}
\newcolorbox{mybox}[2][][enhanced,skin=enhancedlast jigsaw,
attach boxed title to top left={xshift=-4mm,yshift=-0.5mm},
fonttitle=\bfseries\sffamily,varwidth boxed title=0.7\linewidth,
colbacktitle=blue!45!white,colframe=red!50!black,
interior style={top color=blue!10!white,bottom color=red!10!white},
boxed title style={empty,arc=0pt,outer arc=0pt,boxrule=0pt},
underlay boxed title={

\fill[blue!45!white] (title.north west) -- (title.north east)
-- +(\tcbboxedtitleheight-1mm,-\tcbboxedtitleheight+1mm)
-- ([xshift=4mm,yshift=0.5mm]frame.north east) -- +(0mm,-1mm)
-- (title.south west) -- cycle;
\fill[blue!45!white!50!black] ([yshift=-0.5mm]frame.north west)
-- +(-0.4,0) -- +(0,-0.3) -- cycle;
\fill[blue!45!white!50!black] ([yshift=-0.5mm]frame.north east)
-- +(0,-0.3) -- +(0.4,0) -- cycle; },
title={#2},#1}

\begin{mybox}{My title}
\lipsum[2]
\end{mybox}
```

### My title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
% \usepackage{varwidth}
\newcolorbox{mybox}[2][][enhanced,
attach boxed title to top left={xshift=1cm,yshift=-2mm},
fonttitle=\bfseries,\varwidth boxed title=0.7\linewidth,
colbacktitle=green!45!white,coltitle=green!10!black,colframe=green!50!black,
interior style={top color=yellow!10!white,bottom color=green!10!white},
boxed title style={boxrule=0.75mm,colframe=white,
borderline={0.1mm}{0mm}{green!50!black},
borderline={0.1mm}{0.75mm}{green!50!black},
interior style={top color=green!10!white,bottom color=green!10!white,
middle color=green!50!white},
drop fuzzy shadow},
title={#2},#1}

\begin{mybox}{My title}
\lipsum[2]
\end{mybox}
```

### My title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
\newtcolorbox{flipbox}[2][]{%
    enhanced,colframe=blue!50!black,colback=yellow!5,fonttitle=\bfseries,
    flip title={interior hidden},title={#2},#1}

\begin{flipbox}{My title}
\lipsum[2]
\end{flipbox}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

My title

```
% \usepackage{varwidth}
\newtcolorbox{mybox}[2][]{skin=enhancedlast jigsaw,interior hidden,
boxsep=0pt,top=0pt,colframe=red,coltitle=red!50!black,
fonttitle=\bfseries\sffamily,
attach boxed title to bottom center,
boxed title style={empty,boxrule=0.5mm},
varwidth boxed title=0.5\linewidth,
underlay boxed title={%
    \draw[white,line width=0.5mm]
        ([xshift=0.3mm-\tcboxedtitleheight*2,yshift=0.3mm]title.north west)
        --([xshift=-0.3mm+\tcboxedtitleheight*2,yshift=0.3mm]title.north east);
    \path[draw=red,top color=white,bottom color=red!50!white,line width=0.5mm]
        ([xshift=0.25mm-\tcboxedtitleheight*2,yshift=0.25mm]title.north west)
        cos +(\tcboxedtitleheight,-\tcboxedtitleheight/2)
        sin +(\tcboxedtitleheight,-\tcboxedtitleheight/2)
        -- ([xshift=0.25mm,yshift=0.25mm]title.south west)
        -- ([yshift=0.25mm]title.south east)
        cos +(\tcboxedtitleheight,\tcboxedtitleheight/2)
        sin +(\tcboxedtitleheight,\tcboxedtitleheight/2); },
    title={#2},#1}

\begin{mybox}{My title}
\lipsum[2]
\end{mybox}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

My title

```
% \usepackage{varwidth}
\newtcolorbox{mybox}[2][][enhanced,
  before skip=2mm, after skip=2mm,
  colback=black!5,colframe=black!50,boxrule=0.2mm,
  attach boxed title to top left={xshift=1cm,yshift*=1mm-\tcbboxedtitleheight},
  varwidth boxed title*=-3cm,
  boxed title style={frame code={
    \path[fill=tcbcolback!30!black]
      ([yshift=-1mm,xshift=-1mm]frame.north west)
      arc[start angle=0,end angle=180,radius=1mm]
      ([yshift=-1mm,xshift=1mm]frame.north east)
      arc[start angle=180,end angle=0,radius=1mm];
    \path[left color=tcbcolback!60!black,right color=tcbcolback!60!black,
      middle color=tcbcolback!80!black]
      ([xshift=-2mm]frame.north west) -- ([xshift=2mm]frame.north east)
      [rounded corners=1mm]-- ([xshift=1mm,yshift=-1mm]frame.north east)
      -- (frame.south east) -- (frame.south west)
      -- ([xshift=-1mm,yshift=-1mm]frame.north west)
      [sharp corners]-- cycle;
    },interior engine=empty,
  },
  fonttitle=\bfseries,
  title={#2},#1}

\begin{mybox}[colbacktitle=green]{My title}
\lipsum[2]
\end{mybox}
\begin{mybox}[colbacktitle=red]{My title}
\lipsum[3]
\end{mybox}
```

### My title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### My title

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

2016-02-26

**/tcb/no boxed title style**

(style, initially set)

Removes all options which were set by **/tcb/boxed title style**<sup>→ P. 185</sup>.

### /tcb/hbox boxed title

(no value, initially set)

The title text content is captured with a horizontal box. Especially, there are no linebreak possible.

```
\newtcolorbox{mybox}[1]{hbox boxed title,  
enhanced,attach boxed title to top center=  
{yshift=-3mm,yshifttext=-1mm},  
boxed title style={size=small,colback=red},  
title={#1}}  
  
\begin{mybox}{Short title}  
This is a \textbf{tcolorbox}.  
\end{mybox}\bigskip  
  
\begin{mybox}{This title is not really very short}  
This is a \textbf{tcolorbox}.  
\end{mybox}
```

Short title

This is a **tcolorbox**.

This title is not really very short

This is a **tcolorbox**.

### /tcb/minipage boxed title=<length>

(initially unset)

The title text content is captured with a minipage with a width of *<length>*. By default, the resulting boxed title is somewhat smaller than the main box.

```
\newtcolorbox{mybox}[1]{minipage boxed title,  
enhanced,attach boxed title to top center=  
{yshift=-3mm,yshifttext=-1mm},  
boxed title style={size=small,colback=red},  
center title,title={#1}}  
  
\begin{mybox}{Short title}  
This is a \textbf{tcolorbox}.  
\end{mybox}\bigskip  
  
\begin{mybox}{This title is not really very short}  
This is a \textbf{tcolorbox}.  
\end{mybox}
```

Short title

This is a **tcolorbox**.

This title is not really  
very short

This is a **tcolorbox**.

### /tcb/minipage boxed title\*=<length>

(initially unset)

The title text content is captured with a minipage with a width of main box width plus *<length>*. By default, the resulting boxed title is somewhat smaller than the main box.

```
\newtcolorbox{mybox}[1]{minipage boxed title*=-2cm,  
enhanced,attach boxed title to top center=  
{yshift=-3mm,yshifttext=-1mm},  
boxed title style={size=small,colback=red},  
center title,title={#1}}  
  
\begin{mybox}{Short title}  
This is a \textbf{tcolorbox}.  
\end{mybox}\bigskip  
  
\begin{mybox}{This title is not really very short}  
This is a \textbf{tcolorbox}.  
\end{mybox}
```

Short title

This is a **tcolorbox**.

This title is not  
really very short

This is a **tcolorbox**.

### /tcb/tikznode boxed title=<options>

(initially unset)

The title text content is captured with a TikZ node with given TikZ *<options>*. The text is centered by default

```
\newtcolorbox{mybox}[1]{tikznode boxed title,
enhanced,attach boxed title to top center=
{yshift=-3mm,yshifttext=-1mm},
boxed title style={size=small,colback=red},
title={#1}

\begin{mybox}{Short title}
This is a \textbf{tcolorbox}.
\end{mybox}\bigskip

\begin{mybox}{This title\is not really\very short}
This is a \textbf{tcolorbox}.
\end{mybox}
```

Short title

This is a **tcolorbox**.

This title  
is not really  
very short

This is a **tcolorbox**.

### /tcb/varwidth boxed title=<length>

(initially unset)

The title text content is captured with a varwidth environment with a width of *<length>*. This style needs the `varwidth→ CTAN` package [1] to be loaded manually. By default, the resulting boxed title is somewhat smaller than the main box.

```
% \usepackage{varwidth}
\newtcolorbox{mybox}[1]{varwidth boxed title,
enhanced,attach boxed title to top center=
{yshift=-3mm,yshifttext=-1mm},
boxed title style={size=small,colback=red},
center title,title={#1}

\begin{mybox}{Short title}
This is a \textbf{tcolorbox}.
\end{mybox}\bigskip

\begin{mybox}{This title is not really very short}
This is a \textbf{tcolorbox}.
\end{mybox}
```

Short title

This is a **tcolorbox**.

This title is not really  
very short

This is a **tcolorbox**.

### /tcb/varwidth boxed title\*=<length>

(initially unset)

The title text content is captured with a varwidth environment with a width of main box width plus *<length>*. This style needs the `varwidth→ CTAN` package [1] to be loaded manually. By default, the resulting boxed title is somewhat smaller than the main box.

```
% \usepackage{varwidth}
\newtcolorbox{mybox}[1]{varwidth boxed title*=-2cm,
enhanced,attach boxed title to top center=
{yshift=-3mm,yshifttext=-1mm},
boxed title style={size=small,colback=red},
center title,title={#1}

\begin{mybox}{Short title}
This is a \textbf{tcolorbox}.
\end{mybox}\bigskip

\begin{mybox}{This title is not really very short}
This is a \textbf{tcolorbox}.
\end{mybox}
```

Short title

This is a **tcolorbox**.

This title is not  
really very short

This is a **tcolorbox**.

### 10.3 Watermark Option Keys

The skin `standard`<sup>→ P. 233</sup> does not support these watermarks, but all other skins, e.g. `enhanced`<sup>→ P. 235</sup>.

- ! The watermark options rely on the more general overlay options described in Section 4.12 from page 83. Therefore, *watermarks* and *overlays* cannot be used mixed. But a mixture is possible with the `\usepackage{tcolorbox}` library, see Section 23.

`/tcb/watermark text=<text>`

(no default, initially unset)

Writes some `<text>` in the center of the interior region of a `tcolorbox`. This `<text>` is written *after* the frame and interior are drawn and *before* the text content is drawn. It is zoomed or stretched according the values of `/tcb/watermark zoom`<sup>→ P. 194</sup> or `/tcb/watermark stretch`<sup>→ P. 196</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,watermark text=My Watermark]
\lipsum[1]
\tcblower
\lipsum[2]
\end{tcolorbox}
```

My title

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/watermark text on=<part> is <text>`

(no default, initially unset)

This option writes some `<text>` in the center of the interior region of a `tcolorbox` as described for `/tcb/watermark text`. But this is done only for boxes named `<part>` of a break sequence, see `/tcb/breakable`<sup>→ P. 408</sup>.

Feasible values for `<part>` are:

- `broken`: all broken box parts,
- `unbroken`: unbroken boxes only,
- `first`: first parts of a break sequence,
- `middle`: middle parts of a break sequence,
- `last`: last parts of a break sequence,
- `unbroken and first`: unbroken boxes and first parts of a break sequence,
- `middle and last`: middle and last parts of a break sequence.
- `first and middle`: first and middle parts of a break sequence.

/tcb/watermark graphics=<file name>

(no default, initially unset)

Draws an external picture referenced by <file name> in the center of the interior region of a **tcolorbox**. The picture is drawn *after* the frame and interior are drawn and *before* the text content is drawn. It is zoomed or stretched according the values of /tcb/watermark `zoom`<sup>→ P. 194</sup> or /tcb/watermark `stretch`<sup>→ P. 196</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,watermark graphics=Basilica_5.png,
  watermark opacity=0.15]
\lipsum[1-2]
\tcblower
This example uses a public domain picture from\\
\url{http://commons.wikimedia.org/wiki/File:Basilica_5.png}
\end{tcolorbox}
```

### My title

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

This example uses a public domain picture from  
[http://commons.wikimedia.org/wiki/File:Basilica\\_5.png](http://commons.wikimedia.org/wiki/File:Basilica_5.png)

/tcb/watermark graphics on=<part> is <file name>

(no default, initially unset)

This option draws a picture referenced by <file name> in the center of the interior region of a **tcolorbox** as described for /tcb/watermark `graphics`. But this is done only for boxes named <part> of a break sequence, see /tcb/breakable<sup>→ P. 408</sup>.

Feasible values for <part> are:

- **broken**: all broken box parts,
- **unbroken**: unbroken boxes only,
- **first**: first parts of a break sequence,
- **middle**: middle parts of a break sequence,
- **last**: last parts of a break sequence,
- **unbroken and first**: unbroken boxes and first parts of a break sequence,
- **middle and last**: middle and last parts of a break sequence.

/tcb/watermark tikz=<graphical code>

(no default, initially unset)

Draws the given `tikz <graphical code>` in the center of the interior region of a `tcolorbox`. The code is executed *after* the frame and interior are drawn and *before* the text content is drawn. The result is zoomed or stretched according the values of `/tcb/watermark zoom`<sup>→ P. 194</sup> or `/tcb/watermark stretch`<sup>→ P. 196</sup>.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,
  watermark tikz={\draw [line width=2mm] circle (1cm)
    node{\fontfamily{ptm}\fontseries{b}\fontsize{20mm}{20mm}\selectfont ?};}]
  \lipsum[1]
  \tcblower
  \lipsum[2]
\end{tcolorbox}
```

### My title

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

/tcb/watermark tikz on=<part> is <graphical code>

(no default, initially unset)

This option draws the given `tikz <graphical code>` in the center of the interior region of a `tcolorbox` as described for `/tcb/watermark tikz`. But this is done only for boxes named `<part>` of a break sequence, see `/tcb/breakable`<sup>→ P. 408</sup>.

Feasible values for `<part>` are:

- `broken`: all broken box parts,
- `unbroken`: unbroken boxes only,
- `first`: first parts of a break sequence,
- `middle`: middle parts of a break sequence,
- `last`: last parts of a break sequence,
- `unbroken and first`: unbroken boxes and first parts of a break sequence,
- `middle and last`: middle and last parts of a break sequence.

/tcb/no watermark

(style, no default, initially set)

Removes the watermark if set before. This is an alias for `/tcb/no overlay`<sup>→ P. 84</sup>.

/tcb/watermark opacity=<fraction>

(no default, initially 1.00)

Sets the opacity value  $\in [0, 1]$  for a watermark.

```
\tcbset{enhanced,colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
watermark text=Watermark,nobeforeafter,width=(\linewidth-2mm)/2}

\begin{tcolorbox}[title=Opacity 1.00,watermark opacity=1.00]
\lipsum[2]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[title=Opacity 0.50,watermark opacity=0.50]
\lipsum[2]
\end{tcolorbox}\%
```

### Opacity 1.00

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, telus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### Opacity 0.50

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, telus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

U 2022-07-21

/tcb/watermark zoom=<fraction>

(default 1, initially 0.75)

Sets the zoom value for a watermark. The zoom respects the aspect ratio. The value 1.0 means to fill the whole box until the watermark touches the frame.

```
\tcbset{enhanced,colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
watermark text=Watermark,nobeforeafter,width=(\linewidth-2mm)/2}

\begin{tcolorbox}[title=Zoom 1.0,watermark zoom=1.0]
\lipsum[2]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[title=Zoom 0.5,watermark zoom=0.5]
\lipsum[2]
\end{tcolorbox}\%
```

### Zoom 1.0

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, telus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### Zoom 0.5

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, telus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

U 2022-07-21

/tcb/watermark shrink=<fraction>

(default 1, initially unset)

Identically to /tcb/watermark zoom<sup>→ P. 194</sup>, but the watermark never gets enlarged. Thus, the watermark keeps its original size or is shrunk.

U 2022-07-21

/tcb/watermark overzoom=<fraction>

(default 1, initially unset)

Sets the overzoom value for a watermark. The overzoom respects the aspect ratio. The value 1.0 means to fill the whole box until the watermark touches all four sides of the frame.

```
\tcbset{enhanced,colback=white,colframe=blue!50!black,fonttitle=\bfseries,
watermark opacity=0.5,
watermark graphics=lichtspiel.jpg,nobeforeafter,width=(\ linewidth-2mm)/2}

\begin{tcolorbox}[title=Zoom 1.0,watermark zoom=1.0]
\lipsum[1]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[title=Overzoom 1.0,watermark overzoom=1.0]
\lipsum[1]
\end{tcolorbox}
```

### Zoom 1.0

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### Overzoom 1.0

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



If a /tcb/watermark overzoom value of 1.0 is used in connection with invisible top and bottom rules which still have a thickness greater than 0pt, the space of these invisible rules may not be covered by the watermark. For example, this situation may occur during the breaking of /tcb/enhanced<sup>→ P. 235</sup> boxes. To avoid this optical glitch, just set /tcb/pad at break<sup>→ P. 413</sup> to any desired value.

Sets the stretch value for a watermark. The stretch value is applied to width and height in relation to the box dimensions. It does not respect the aspect ratio. The value 1.0 means to fill the whole box.

```
\tcbset{enhanced,colback=white,colframe=blue!50!black,fonttitle=\bfseries,
watermark graphics=lichtspiel.jpg,watermark opacity=0.5,
nobeforeafter,width=(\linewidth-2mm)/2}

\begin{tcolorbox}[title=Stretch 1.00,watermark stretch=1.00]
\lipsum[2]
\end{tcolorbox}\hfill%
\begin{tcolorbox}[title=Stretch 0.50,watermark stretch=0.50]
\lipsum[2]
\end{tcolorbox}%
```

### Stretch 1.00

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, telus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### Stretch 0.50

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, telus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Sets the color for the watermark.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,watermark text=My Watermark,
watermark color=yellow!50!red]
\lipsum[1]
\end{tcolorbox}
```

### My title

My Watermark

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Sets the watermark to be clipped to the interior area.

```
\tcbset{enhanced,colback=white,colframe=blue!50!white,fonttitle=\bfseries,
watermark opacity=0.5,watermark stretch=1.00,arc=3mm,
watermark graphics=lichtspiel.jpg}

\begin{tcolorbox}[title=Clip (default),clip watermark]
\lipsum[1]
\end{tcolorbox}

\begin{tcolorbox}[title=No clip,clip watermark=false]
\lipsum[1]
\end{tcolorbox}%
```

### Clip (default)

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### No clip

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



Removing the clipping should be necessary only in very rare situations. Until version 5.1.1 (2022/06/24), theoretically, the watermark could be extended over the boundaries of the box without limit. Newer versions restrict the watermark to a box scaled 4 times the actual `tcolorbox`. If you really need to extend further, you are strongly advised to implement this by using `/tcb/overlay`<sup>P. 83</sup> or `/tcb/underlay`<sup>P. 221</sup> directly where no restrictions apply. Note that a watermark is just a special `/tcb/overlay`<sup>P. 83</sup>.

## 10.4 Clip Environments

The following clip environments are applicable for all skins which use engines of type `path`, `pathfirst`, `pathmiddle`, or `pathlast`. Especially, the skin `enhanced`<sup>→ P. 235</sup> supports *all* of them and `standard`<sup>→ P. 233</sup> `none`. The typical area of application is inside overlay code, see Section 4.12 from page 83.

```
\begin{tcbclipframe}
  {environment content}
\end{tcbclipframe}
```

Defines a `Tikz` scope which clips to the frame area path.

```
\makeatletter
\newtcolorbox[picturebox]{2}[]%
{enhanced,frame hidden,interior hidden,fonttitle=\bfseries,
overlay={\begin{tcbclipframe}\node at (frame)
{\includegraphics[width=\tcb@width,height=\tcb@height]{#2}};\end{tcbclipframe}%
\begin{tcbclipinterior}\fill[white,opacity=0.75]
(frame.south west) rectangle (frame.north east);\end{tcbclipinterior}},#1}
\makeatother

\begin{picturebox}[title=My Picture Box]{lichtspiel.jpg}
\lipsum[1]
\end{picturebox}
```

My Picture Box

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.


```
\begin{tcbinvclipframe}
  {environment content}
\end{tcbinvclipframe}
```

Defines a Tikz scope which clips to the *outside* of the frame area path.

```
\tcbset{enhanced jigsaw,fonttitle=\bfseries,opacityback=0.35,colback=blue!5!white,
  frame style={left color=red!75!black,right color=red!10!yellow}

\begin{tikzpicture} % draw two balls
  \path[use as bounding box] (0,0.8) rectangle +(0.1,0.1);
  \shadedraw [shading=ball] (0,0) circle (1cm);
  \shadedraw [ball color=red] (3,-2.2) circle (1cm);
\end{tikzpicture}

\begin{tcolorbox}[title=A translucent box,
  overlay={\begin{tcbinvclipframe}
    \draw[red,line width=1cm] ([xshift=-2mm,yshift=2mm]frame.north west)
      --([xshift=2mm,yshift=-2mm]frame.south east);
    \draw[red,line width=1cm] ([xshift=-2mm,yshift=-2mm]frame.south west)
      --([xshift=2mm,yshift=2mm]frame.north east);
  \end{tcbinvclipframe}}
  \lipsum[2]
\end{tcolorbox}
```

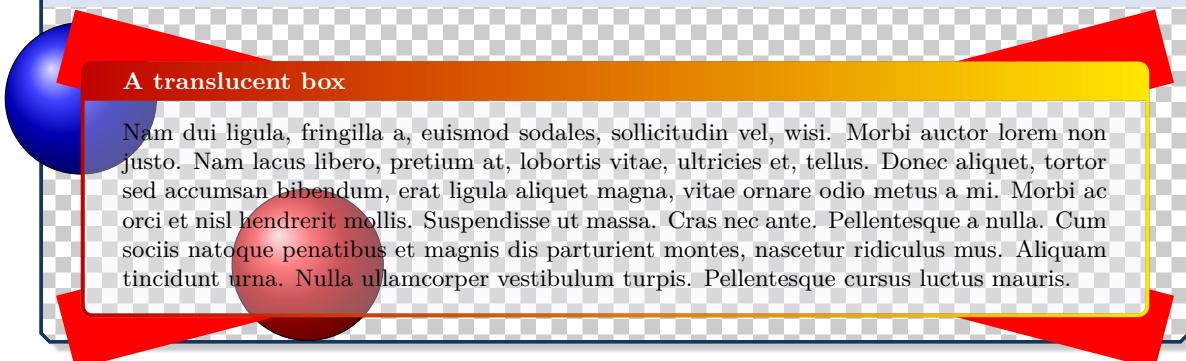

```
\begin{tcbclipinterior}
  {environment content}
\end{tcbclipinterior}
```

Defines a Tikz scope which clips to the interior area path.

```
\begin{tcolorbox}[enhanced,title=My Title,
  overlay={\begin{tcbclipinterior}
    \draw[red,line width=1cm] (interior.north west)--(interior.south east);
    \draw[red,line width=1cm] (interior.south west)--(interior.north east);
  \end{tcbclipinterior}}]
\lipsum[1]
\end{tcolorbox}
```

My Title

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

```
\begin{tcbcliptitle}
  {environment content}
\end{tcbcliptitle}
```

Defines a Tikz scope which clips to the title area path.

```
\begin{tcolorbox}[enhanced,title=My Title,colframe=blue,colback=yellow!10!white,
  overlay={\begin{tcbcliptitle}\node at (title)
    {\includegraphics[width=\linewidth]{lichtspiel.jpg}};\end{tcbcliptitle}}]
\lipsum[1]
\end{tcolorbox}
```

My Title

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

/tcb/clip title=true|false

(default true, initially false)

Sets the title to be clipped to the title area.

```
\tcbset{enhanced,width=5cm,colframe=red!50!white,coltitle=black,  
colbacktitle=yellow!50!white}  
  
\begin{tcolorbox}[title=\mbox{This is a title which is unbreakable and far too long}]  
This is a tcolorbox.  
\end{tcolorbox}  
  
\begin{tcolorbox}[title=\mbox{This is a title which is unbreakable and far too long},  
clip title]  
This is a tcolorbox.  
\end{tcolorbox}
```

This is a title which is unbreakable and far too long

This is a tcolorbox.

This is a title which is unbreak

This is a tcolorbox.

/tcb/clip upper=true|false

(default true, initially false)


Sets the upper part to be clipped to the interior area.

```
\newcommand{\mygraphics}[2][]{%  
 \tcolorbox[enhanced,boxsep=0pt,top=0pt,bottom=0pt,left=0pt,  
 right=0pt,boxrule=0.4pt,drop fuzzy shadow,clip upper,  
 colback=black!75!white,toptitle=2pt,bottomtitle=2pt,nobeforeafter,  
 center title,fonttitle=\small\sffamily,title=\detokenize{\#2}]  
 {\includegraphics[width=\the\dimexpr(\linewidth-4mm)/2\relax]{\#2}}}  
  
\mygraphics{lichtspiel.jpg}\hfill  
\mygraphics{Basilica_5.png}
```

lichtspiel.jpg




Basilica\_5.png

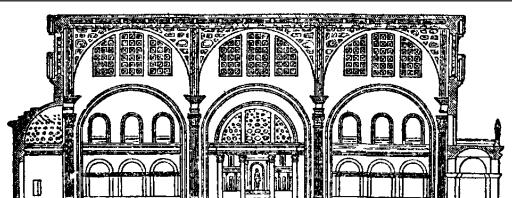

The example for `/tcb/clip upper`<sup>→ P. 201</sup> sizes the box according to the dimensions of the picture. To do it the other way around, the watermark options provide an easy solution.

```
\newcommand{\mygraphics}[2][]{%
\tcbox[enhanced,capture=minipage,boxsep=0pt,top=0pt,bottom=0pt,left=0pt,
right=0pt,boxrule=0.4pt,drop fuzzy shadow,nobeforeafter,
colback=black!75!white,toptitle=2pt,bottomtitle=2pt,
center title,fonttitle=\small\sffamily,title=\detokenize{#2},
width=(\linewidth-4mm)/2,height=6cm,colbacktitle={black},
watermark zoom=1.0,watermark graphics={#2}]{}
\mygraphics{lichtspiel.jpg}\hfill
\mygraphics{Basilica_5.png}
```

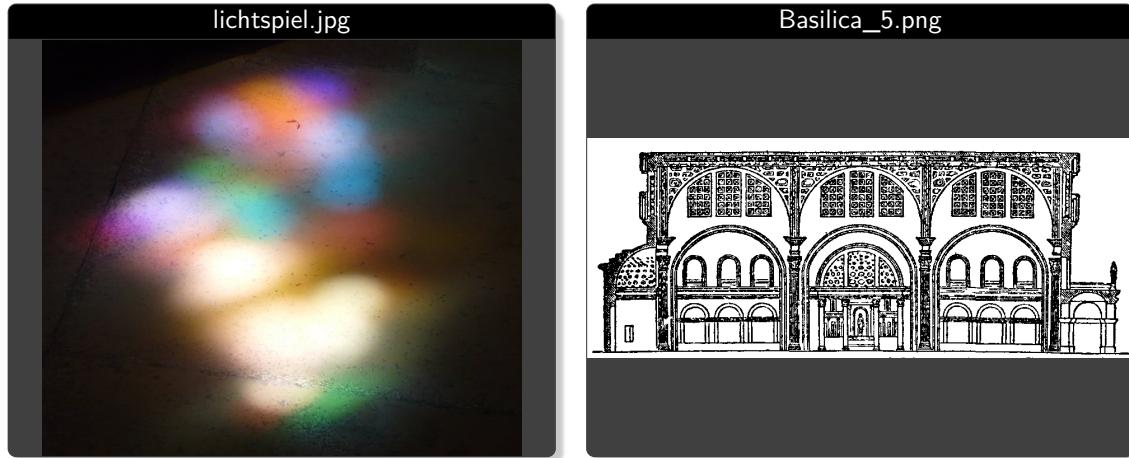

`/tcb/clip lower=true|false`


(default `true`, initially `false`)

Sets the lower part to be clipped to the interior area.

```
\tcbsset{enhanced,width=5cm,colframe=red!50!black,text and listing}

\begin{tcblisting}{}%
Donaudampfschiffahrtskapitänsmützenfransen
\end{tcblisting}

\begin{tcblisting}{clip lower}%
Donaudampfschiffahrtskapitänsmützenfransen
\end{tcblisting}
```

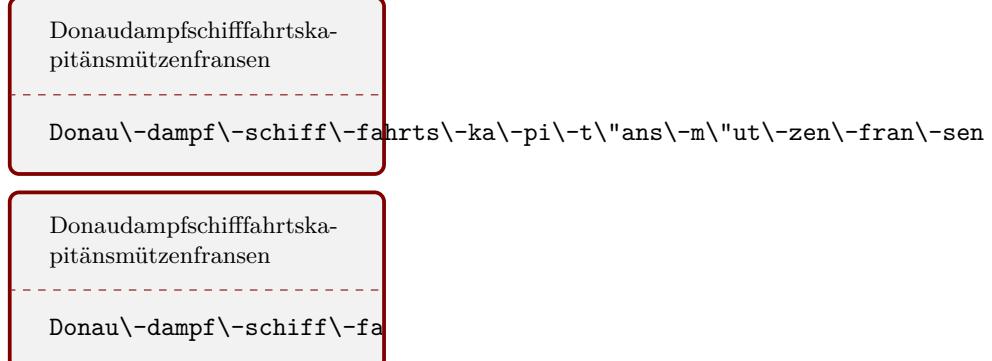

## 10.5 Border Line Option Keys

The skin `standard`<sup>→ P. 233</sup> does not support these border lines, but most other skins, e.g. `enhanced`<sup>→ P. 235</sup>.

The borderlines are independent from the normal `tcolorbox` rules. They may be used with or without the `/tcb/segmentation engine`<sup>→ P. 159</sup>.

The borderlines are stackable, i.e. several different border lines can be used on the same `tcolorbox`. They are drawn *after* the box frame and box interior and *before* overlays or watermarks.



Technically, the normal `tcolorbox` rules result from a TikZ *filling* process. The border lines are created by a TikZ *drawing* process. This can be used to apply different effects.

`/tcb/borderline={⟨width⟩}{⟨offset⟩}{⟨options⟩}` (no default, initially unset)

Adds a new borderline to the stack of border lines. This borderline is drawn with the given `⟨width⟩` and gets an `⟨offset⟩` computed from the frame outline. A positive `⟨offset⟩` value moves the borderline inside the `tcolorbox` and a negative `⟨offset⟩` value moves it outside without changing the bounding box.

The border line is drawn along a TikZ path with the given TikZ `⟨options⟩`. Note that the TikZ `line width` option should not be used here.

The border lines adapt to the rounded corners of the `tcolorbox`. An inside borderline will switch to sharp corners if necessary, an outside borderline will always be rounded except for `/tcb/sharp corners`<sup>→ P. 55</sup>.

```
\begin{tcolorbox}[enhanced,title=Rounded corners,fonttitle=\bfseries,boxsep=5pt,
arc=8pt,
borderline={0.5pt}{0pt}{red},
borderline={0.5pt}{5pt}{blue,dotted},
borderline={0.5pt}{-5pt}{green} ]
This is a tcolorbox.
\end{tcolorbox}
\bigskip
\begin{tcolorbox}[enhanced,title=Sharp corners,fonttitle=\bfseries,boxsep=5pt,
arc=8pt,sharp corners=downhill,
borderline={0.5pt}{0pt}{red},
borderline={0.5pt}{5pt}{blue,dotted},
borderline={0.5pt}{-5pt}{green} ]
This is a tcolorbox.
\end{tcolorbox}
```

### Rounded corners

This is a tcolorbox.

### Sharp corners

This is a tcolorbox.

```
% \usepackage{lipsum}
\begin{tcolorbox}[enhanced,arc=3mm,boxrule=1.5mm,boxsep=1.5mm,
colback=yellow!20!white,
colframe=blue,
borderline={1mm}{1mm}{white},
borderline={1mm}{2mm}{red} ]
\lipsum[1]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

```
% \usepackage{lipsum}
\begin{tcolorbox}[enhanced,arc=3mm,boxrule=1.5mm,
frame hidden,colback=blue!10!white,
borderline={1mm}{0mm}{blue,dotted} ]
\lipsum[2]
\end{tcolorbox}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
% \usepackage{lipsum}
\begin{tcolorbox}[enhanced,skin=enhancedmiddle,
frame hidden,interior hidden,top=0mm,bottom=0mm,boxsep=0mm,
borderline={0.75mm}{0mm}{red},
borderline={0.75mm}{0.75mm}{red!50!yellow},
borderline={0.75mm}{1.5mm}{yellow}, ]
\lipsum[3]
\end{tcolorbox}
```

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

```
% \usepackage{lipsum}
\newcolorbox{mygreenbox}[2][]{%
  enhanced, width=\linewidth-6pt,
  enlarge top by=3pt, enlarge bottom by=3pt,
  enlarge left by=3pt, enlarge right by=3pt,
  title={#2}, frame hidden, boxrule=0pt, top=1mm, bottom=1mm,
  colframe=green!30!black, colbacktitle=green!50!yellow,
  coltitle=black, colback=green!25!white,
  borderline={0.5pt}{-0.5pt}{green!75!blue},
  borderline={1pt}{-3pt}{green!50!blue}, #1}

\begin{mygreenbox}{My title}
  \lipsum[4]
\end{mygreenbox}
```

### My title

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

#### /tcb/no borderline

(no default, initially set)

Removes all borderlines if set before.

#### /tcb/show bounding box=<color>

(default red, initially unset)

Displays the bounding box borderline of a `tcolorbox`. Its intended use is debugging and fine tuning. It should not be part of a final document. The optional `<color>` is the base color for the bounding box borderline.

```
\tcbset{enhanced,nobeforeafter,width=4cm,fonttitle=\bfseries}

\begin{tcolorbox}[show bounding box,title=Normal]
This is a tcolorbox.
\end{tcolorbox}%
\begin{tcolorbox}[show bounding box=blue,title=Shadow,drop fuzzy shadow]
This is a tcolorbox.
\end{tcolorbox}%
\begin{tcolorbox}[show bounding box=green,title=Enlarged,drop fuzzy shadow,
  enlarge by=2mm]
This is a tcolorbox.
\end{tcolorbox}
```





The following *partial* borderlines act slightly different from the complete borderlines described before. They ignore rounded corner settings, their length is not modified by their  $\langle offset \rangle$ , they ignore skin settings but adapt to breakable boxes.

N 2014-10-20

**/tcb/borderline north={⟨width⟩}{⟨offset⟩}{⟨options⟩}** (no default, initially unset)

Adds a new borderline with the given  $\langle width \rangle$  to the north of the **tcolorbox**. A positive  $\langle offset \rangle$  value moves the borderline inside the **tcolorbox** and a negative  $\langle offset \rangle$  value moves it outside without changing the bounding box.

```
\begin{tcolorbox}[enhanced,  
borderline north={2pt}{-2pt}{red}]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

N 2014-10-20

**/tcb/borderline south={⟨width⟩}{⟨offset⟩}{⟨options⟩}** (no default, initially unset)

Adds a new borderline with the given  $\langle width \rangle$  to the south of the **tcolorbox**. A positive  $\langle offset \rangle$  value moves the borderline inside the **tcolorbox** and a negative  $\langle offset \rangle$  value moves it outside without changing the bounding box.

```
\begin{tcolorbox}[enhanced,  
borderline south={2pt}{-2pt}{red}]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

N 2014-10-20

**/tcb/borderline east={⟨width⟩}{⟨offset⟩}{⟨options⟩}** (no default, initially unset)

Adds a new borderline with the given  $\langle width \rangle$  to the east of the **tcolorbox**. A positive  $\langle offset \rangle$  value moves the borderline inside the **tcolorbox** and a negative  $\langle offset \rangle$  value moves it outside without changing the bounding box.

```
\begin{tcolorbox}[enhanced,  
borderline east={2pt}{-2pt}{red}]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

N 2014-10-20

**/tcb/borderline west={⟨width⟩}{⟨offset⟩}{⟨options⟩}** (no default, initially unset)

Adds a new borderline with the given  $\langle width \rangle$  to the west of the **tcolorbox**. A positive  $\langle offset \rangle$  value moves the borderline inside the **tcolorbox** and a negative  $\langle offset \rangle$  value moves it outside without changing the bounding box.

```
\begin{tcolorbox}[enhanced,  
borderline west={2pt}{-2pt}{red}]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

N 2014-10-20

**/tcb/borderline horizontal={⟨width⟩}{⟨offset⟩}{⟨options⟩}** (no default, initially unset)

Adds a new borderline with the given ⟨width⟩ to the north and south of the **tcolorbox**. A positive ⟨offset⟩ value moves the borderlines inside the **tcolorbox** and a negative ⟨offset⟩ value moves them outside without changing the bounding box.

```
\begin{tcolorbox}[blanker,top=3mm,bottom=3mm,  
borderline horizontal={2pt}{0pt}{red}]  
This is a \textbf{tcolorbox}.  
\end{tcolorbox}
```

This is a **tcolorbox**.

N 2014-10-20

**/tcb/borderline vertical={⟨width⟩}{⟨offset⟩}{⟨options⟩}** (no default, initially unset)

Adds a new borderline with the given ⟨width⟩ to the east and west of the **tcolorbox**. A positive ⟨offset⟩ value moves the borderlines inside the **tcolorbox** and a negative ⟨offset⟩ value moves them outside without changing the bounding box.

```
\begin{tcolorbox}[blanker,left=3mm,right=3mm,  
borderline vertical={2pt}{0pt}{red}]  
This is a \textbf{tcolorbox}.\\  
My second line.  
\end{tcolorbox}
```

This is a **tcolorbox**.  
My second line.

```
\begin{tcolorbox}[enhanced,colback=yellow!10!white,boxrule=0pt,frame hidden,  
borderline north={1mm}{-2mm}{red},  
borderline south={1mm}{-2mm}{blue},  
borderline west={1mm}{-2mm}{green},  
borderline east={1mm}{-2mm}{yellow}]  
\lipsum[1]  
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

## 10.6 Shadow Option Keys

The skin `standard`<sup>→ P. 233</sup> does not support these shadows, but most other skins, e.g. `enhanced`<sup>→ P. 235</sup>.

The shadows are stackable, i.e. several different shadows can be used on the same `tcolorbox`. They are drawn *before* the box frame is drawn.

`/tcb/no shadow`

(no default)

Removes all shadows if set before.

### 10.6.1 Common Shadows and Halos

`/tcb/drop shadow=<color>`

(style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,  
       colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[drop shadow]  
This is a tcolorbox.  
\end{tcolorbox}\par\bigskip  
\begin{tcolorbox}[title=Another shadow,  
               drop shadow=blue]  
This is a tcolorbox.  
\end{tcolorbox}
```

This is a tcolorbox.

Another shadow

This is a tcolorbox.

`/tcb/drop fuzzy shadow=<color>`

(style, default `black!50!white`)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,  
       colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[drop fuzzy shadow]  
This is a tcolorbox.  
\end{tcolorbox}\par\bigskip  
\begin{tcolorbox}[title=Another shadow,  
               drop fuzzy shadow=blue]  
This is a tcolorbox.  
\end{tcolorbox}
```

This is a tcolorbox.

Another shadow

This is a tcolorbox.

`/tcb/drop midday shadow=<color>`

(style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,  
       colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[drop midday shadow]  
This is a tcolorbox.  
\end{tcolorbox}\par\bigskip  
\begin{tcolorbox}[title=Another shadow,  
               drop midday shadow=blue]  
This is a tcolorbox.  
\end{tcolorbox}
```

This is a tcolorbox.

Another shadow

This is a tcolorbox.

/tcb/**drop fuzzy midday shadow**=*(color)*

(style, default black!50!white)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows. Optionally, the *(color)* for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,  
colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[drop fuzzy midday shadow]  
This is a tcolorbox.  
\end{tcolorbox}\par\bigskip  
\begin{tcolorbox}[title=Another shadow,  
drop fuzzy midday shadow=blue]  
This is a tcolorbox.  
\end{tcolorbox}
```

This is a tcolorbox.

Another shadow

This is a tcolorbox.

/tcb/**halo**=*(size)* **with** *(color)*

(style, default 0.9mm with yellow)

Adds a new halo shadow with the given *(color)* which overlaps the colorbox an all sides by *(size)*.

```
\tcbset{enhanced,colback=red!5!white,  
colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[title=My own halo,halo]  
This is a tcolorbox.  
\end{tcolorbox}\par\bigskip\bigskip  
\begin{tcolorbox}[title=Another halo,  
halo=2mm with green]  
This is a tcolorbox.  
\end{tcolorbox}
```

My own halo

This is a tcolorbox.

Another halo

This is a tcolorbox.

/tcb/**fuzzy halo**=*(size)* **with** *(color)*

(style, default 0.9mm with yellow)

Adds a new fuzzy halo shadow with the given *(color)* which overlaps the colorbox an all sides by *(size)* plus 0.48mm.

```
\tcbset{enhanced,colback=red!5!white,  
colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[title=My own halo,fuzzy halo]  
This is a tcolorbox.  
\end{tcolorbox}\par\bigskip\bigskip  
\begin{tcolorbox}[title=Another halo,  
fuzzy halo=2mm with green]  
This is a tcolorbox.  
\end{tcolorbox}
```

My own halo

This is a tcolorbox.

Another halo

This is a tcolorbox.

```
\begin{tcolorbox}[blank,enhanced jigsaw,boxsep=2pt,arc=2pt,  
fuzzy halo=2mm with red!50!white,  
fuzzy halo=1mm with white]  
\lipsum[1]  
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

For all following shadows, the optionally given `<color>` for the shadow can be changed equivalent to the preceding examples.

`/tcb/drop shadow southeast=<color>` (style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows. This shadow is identical to `/tcb/drop shadow`<sup>P. 208</sup>.

```
\begin{tcolorbox}[drop shadow southeast,
    enhanced,colback=red!5!white,colframe=red!75!black]
    This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop shadow south=<color>` (style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows. This shadow is identical to `/tcb/drop midday shadow`<sup>P. 208</sup>.

```
\begin{tcolorbox}[drop shadow south,
    enhanced,colback=red!5!white,colframe=red!75!black]
    This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop shadow southwest=<color>` (style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow southwest,
    enhanced,colback=red!5!white,colframe=red!75!black]
    This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop shadow west=<color>` (style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow west,
    enhanced,colback=red!5!white,colframe=red!75!black]
    This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop shadow northwest=<color>` (style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow northwest,
    enhanced,colback=red!5!white,colframe=red!75!black]
    This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop shadow north=<color>` (style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow north,
    enhanced,colback=red!5!white,colframe=red!75!black]
    This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop shadow northeast=<color>` (style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow northeast,
    enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop shadow east=<color>` (style, default `black!50!white`)

Adds a new shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop shadow east,
    enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow southeast=<color>` (style, default `black!50!white`)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows. This shadow is identical to `/tcb/drop fuzzy shadow`<sup>→ P. 208</sup>.

```
\begin{tcolorbox}[drop fuzzy shadow southeast,
    enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow south=<color>` (style, default `black!50!white`)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows. This shadow is identical to `/tcb/drop fuzzy midday shadow`<sup>→ P. 209</sup>.

```
\begin{tcolorbox}[drop fuzzy shadow south,
    enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow southwest=<color>` (style, default `black!50!white`)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow southwest,
    enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow west=<color>` (style, default `black!50!white`)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow west,
    enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow northwest=(color)` (style, default `black!50!white`)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow northwest,
enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow north=(color)` (style, default `black!50!white`)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow north,
enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow northeast=(color)` (style, default `black!50!white`)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow northeast,
enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

`/tcb/drop fuzzy shadow east=(color)` (style, default `black!50!white`)

Adds a new fuzzy shadow with standard dimensions to the stack of shadows.

```
\begin{tcolorbox}[drop fuzzy shadow east,
enhanced,colback=red!5!white,colframe=red!75!black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

### 10.6.2 Lifted Shadows

`/tcb/drop lifted shadow=<color>` (style, default `black!50!white`)

Adds a new lifted shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
boxrule=0.4pt,sharp corners,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[drop lifted shadow]
This is a tcolorbox.
\end{tcolorbox}\par\bigskip
\begin{tcolorbox}[title=Another shadow,
drop lifted shadow=blue]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.

`/tcb/drop small lifted shadow=<color>` (style, default `black!50!white`)

Adds a new small lifted shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
boxrule=0.4pt,sharp corners,
colframe=red!75!black,fonttitle=\bfseries}

\tcbox[drop small lifted shadow,size=fbox]
{This is a tcolorbox.}
\par\bigskip
\begin{tcolorbox}[title=Another shadow,
drop small lifted shadow=black]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.

`/tcb/drop large lifted shadow=<color>` (style, default `black!50!white`)

Adds a new large lifted shadow with standard dimensions to the stack of shadows. Optionally, the `<color>` for the shadow can be changed.

```
\tcbset{enhanced,colback=red!5!white,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[drop large lifted shadow]
This is a tcolorbox.
\end{tcolorbox}\par\bigskip
\begin{tcolorbox}[title=Another shadow,
drop large lifted shadow=blue]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

**Another shadow**

This is a tcolorbox.

### 10.6.3 Generic Shadows

`/tcb/shadow={⟨xshift⟩}{⟨yshift⟩}{⟨offset⟩}{⟨options⟩}` (no default)

Adds a new shadow to the stack of shadows. This shadow follows the outline of the `tcolorbox` but is shifted by `⟨xshift⟩` and `⟨yshift⟩`. The `⟨offset⟩` value is a distance value from the frame outline. A positive `⟨offset⟩` value shrinks the shadow and a negative `⟨offset⟩` value enlarges the shadow. The shadow is filled along a TikZ path with the given TikZ `⟨options⟩`.

The shadows adapt to the rounded corners of the `tcolorbox`. A shrunken shadow will switch to sharp corners if necessary, an enlarged shadow may become more rounded depending on several factors. But `/tcb/sharp corners` <sup>→ P. 55</sup> have sharp shadows.

! Shadows are not considered for the bounding box computation by default. Large shadows may be overlapped by the following content. But, the bounding box can be adapted if necessary.

```
\tcbset{enhanced,colback=red!5!white,
        colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My own shadow,
    shadow={2mm}{-1mm}{0mm}{black!50!white}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Another shadow,
    shadow={-1mm}{-2mm}{0mm}{fill=blue,
        opacity=0.5}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Double shadow,
    shadow={-1.5mm}{-1.5mm}{0mm}{fill=blue,
        opacity=0.25},
    shadow={1.5mm}{-1.5mm}{0mm}{fill=red,
        opacity=0.25}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Far shadow,
    shadow={5.5mm}{-3.5mm}{2mm}{fill=black,
        opacity=0.25}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip\bigskip
\begin{tcolorbox}[title=Halo shadow,
    shadow={0mm}{0mm}{-1.5mm}%
        {fill=yellow!75!red,opacity=0.5}]
This is a tcolorbox.
\end{tcolorbox}
```

My own shadow

This is a tcolorbox.

Another shadow

This is a tcolorbox.

Double shadow

This is a tcolorbox.

Far shadow

This is a tcolorbox.

Halo shadow

This is a tcolorbox.

`/tcb/fuzzy shadow={⟨xshift⟩}{⟨yshift⟩}{⟨offset⟩}{⟨step⟩}{⟨options⟩}` (no default)

Adds a new fuzzy shadow to the stack of shadows. Actually, this option adds several shadows which appear like a shadow with a fuzzy border. This fuzzy shadow follows the outline of the `tcolorbox` but is shifted by `⟨xshift⟩` and `⟨yshift⟩`. The `⟨offset⟩` value is a distance value from the frame outline. A positive `⟨offset⟩` value shrinks the shadow and a negative `⟨offset⟩` value enlarges the shadow. The `{⟨step⟩}` value describes a shrink offset used for the combination of the partial shadows. The shadow is filled along a TikZ path with the given TikZ `⟨options⟩` but any `opacity` value will be ignored.

```
\tcbset{enhanced,colback=red!5!white,
        colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My own shadow,
    fuzzy shadow={2mm}{-1mm}{0mm}{0.1mm}%
    {black!50!white}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Another shadow,
    fuzzy shadow={-1mm}{-2mm}{0mm}{0.2mm}%
    {fill=blue}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Double shadow,
    fuzzy shadow={-1.5mm}{-1.5mm}{0mm}{0.1mm}%
    {blue},
    fuzzy shadow={1.5mm}{-1.5mm}{0mm}{0.1mm}%
    {red}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip
\begin{tcolorbox}[title=Far shadow,
    fuzzy shadow={5.5mm}{-3.5mm}{0mm}{0.3mm}%
    {black}]
This is a tcolorbox.
\end{tcolorbox}
\par\bigskip\bigskip
\begin{tcolorbox}[title=Glow shadow,
    fuzzy shadow={0mm}{0mm}{-1.5mm}{0.15mm}%
    {yellow!75!red}]
This is a tcolorbox.
\end{tcolorbox}
```

My own shadow

This is a tcolorbox.

Another shadow

This is a tcolorbox.

Double shadow

This is a tcolorbox.

Far shadow

This is a tcolorbox.

Glow shadow

This is a tcolorbox.

```
\newtcolorbox[mybox][1]{enhanced,
    fuzzy shadow={1.0mm}{-1.0mm}{0.12mm}{0mm}{blue!50!white},
    fuzzy shadow={-1.0mm}{-1.0mm}{0.12mm}{0mm}{red!50!white},
    fuzzy shadow={-1.0mm}{1.0mm}{0.12mm}{0mm}{green!50!white},
    fuzzy shadow={1.0mm}{1.0mm}{0.12mm}{0mm}{yellow!50!white},#1
}

\begin{mybox}[title=A multi shadow box]
This is a tcolorbox.
\end{mybox}
```

A multi shadow box

This is a tcolorbox.


**/tcb/smooth shadow arc=true|false**

(default true, initially true)

If set to `true`, the shadow drawing algorithm tries to do a somewhat smart calculation of the arc for the shadow. The result is pleasing for typical boxes with rounded corners, but gives strange results for circular boxes.

```
\tcbset{enhanced,nobeforeafter,colback=red!5!white,
colframe=red!75!black,width=3cm,square,halign=center,valign=center
}

\begin{tcolorbox}[drop shadow]
Smart shadow arc (arguably better than normal)
\end{tcolorbox}
\hfill
\begin{tcolorbox}[smart shadow arc=false, drop shadow]
Normal shadow arc
\end{tcolorbox}
\hfill
\begin{tcolorbox}[circular arc, drop shadow]
Smart shadow arc (worse than normal)
\end{tcolorbox}
\hfill
\begin{tcolorbox}[circular arc, smart shadow arc=false, drop shadow]
Normal shadow arc
\end{tcolorbox}
```

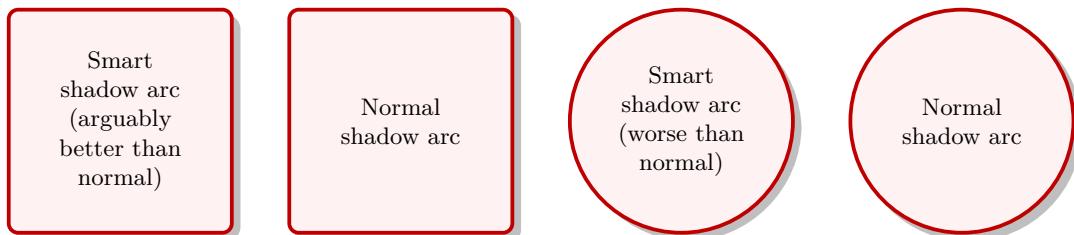**/tcb/lifted shadow={⟨xshift⟩}{⟨yshift⟩}{⟨bend⟩}{⟨step⟩}{⟨options⟩}** (no default)

Adds a new lifted shadow to the stack of shadows. Actually, this option adds several shadows which appear like a shadow with a fuzzy border. This lifted shadow follows the outline of the `tcolorbox` but is shifted by `⟨xshift⟩` and `⟨yshift⟩` on the lower left corner and by  $-⟨xshift⟩$  and `⟨yshift⟩` on the lower right corner. Additionally, there is a `⟨bend⟩` in the middle. The `{⟨step⟩}` value describes a shrink offset used for the combination of the partial shadows. The shadow is filled along a TikZ path with the given TikZ `⟨options⟩` but any `opacity` value will be ignored.

```
\tcbset{enhanced,colback=red!5!white,
boxrule=0.1pt,
colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My own shadow,
lifted shadow={1mm}{-2mm}{3mm}{0.1mm}%
{black!50!white}]
This is a tcolorbox.
\end{tcolorbox}
```

**My own shadow**

This is a tcolorbox.

#### 10.6.4 TikZ Shadows

Alternative to the package shadow options described before, shadows from the «Shadows Library» of TikZ can be used. Such shadows can be added directly to the frame path using `/tcb/frame style→ P. 172`.

```
% \usetikzlibrary{shadows}
\begin{tcolorbox}[enhanced,
  colback=red!5!white,colframe=red!75!black,
  frame style={drop shadow} ]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

```
% \usetikzlibrary{shadows}
\begin{tcolorbox}[enhanced,height=3cm,
  colback=red!5!white,colframe=red!75!black,
  halign=center,valign=center,
  frame style={circular drop shadow} ]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

```
% \usetikzlibrary{shadows}
\begin{tcolorbox}[enhanced,width=2.5cm,
  square,circular arc,
  halign=center,valign=center,
  colback=red!5!white,colframe=red!75!black,
  frame style={circular glow={fill=red}} ]
tcolorbox
\end{tcolorbox}
```

tcolorbox

## 10.7 Ti<sub>k</sub>Z Picture Option Keys

`/tcb/tikz=<tikz option list>`

(no default, initially empty)

Adds the given `<tikz option list>` to the main `tikzpicture` environment used to draw the color box, see [23]. If this option is applied a second time, the new `<tikz option list>` is appended to the current option list.

```
\tcbset{enhanced,colback=red!5!white,
       colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=Transparent box,
               tikz={opacity=0.5,transparency group}]
This is a tcolorbox.
\end{tcolorbox}
```

Transparent box

This is a tcolorbox.

```
\tcbset{enhanced,colback=red!5!white,
       colframe=red!75!black,fonttitle=\bfseries,
       fontupper=\bfseries\Huge,
       halign title=center,halign=center}

\begin{tcolorbox}[title=Rotated box,
               tikz={rotate=30}]
Sold!
\end{tcolorbox}
```

Rotated box  
Sold!

`/tcb/tikz reset`

(initially set)

Removes all options given by `/tcb/tikz`.

`/tcb/at begin tikz=<tikz code>`

(no default, initially empty)

The given `<tikz code>` is executed at the beginning of the `tikzpicture` environment after the Ti<sub>k</sub>Z option `execute at begin picture` was applied. If this option is applied a second time, the new `<tikz code>` is appended to the current code.

`/tcb/at begin tikz reset`

(initially set)

Removes all code given by `/tcb/at begin tikz`.

`/tcb/at end tikz=<tikz code>`

(no default, initially empty)

The given `<tikz code>` is executed at the ending of the `tikzpicture` environment before the Ti<sub>k</sub>Z option `execute at end picture` was applied. If this option is applied a second time, the new `<tikz code>` is appended to the current code.

`/tcb/at end tikz reset`

(initially set)

Removes all code given by `/tcb/at end tikz`.

### /tcb/rotate=<angle>

(no default, initially unset)

Rotates the `tcolorbox` by the given `<angle>`. Note that this is a TikZ coordinate transformation i.e. not all graphical elements like shadings will really be rotated.

```
\tcbset{enhanced,colback=red!5!white,  
colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[title=Rotated box,rotate=30]  
This is a tcolorbox.  
\end{tcolorbox}
```



### /tcb/scale=<fraction>

(no default, initially unset)


Scales the `tcolorbox` by the given `<fraction>`. Note that this is a TikZ coordinate transformation i.e. not all graphical elements like line widths will really be scaled.

```
\tcbset{enhanced,colback=red!5!white,  
colframe=red!75!black,fonttitle=\bfseries}  
  
\begin{tcolorbox}[title=Scaled box,scale=0.5]  
This is a tcolorbox.  
\end{tcolorbox}  
\begin{tcolorbox}[title=Scaled box,scale=1.25]  
This is a tcolorbox.  
\end{tcolorbox}
```



Scaled box

This is a tcolorbox.

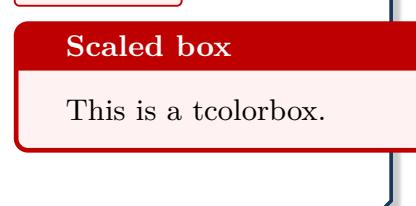

### /tcb/remember

(style, initially unset)

Shortcut for `tikz={remember picture}`. This allows one to reference nodes in other TikZ pictures.

```
\begin{tcolorbox}[enhanced,remember,colback=red!5!white,colframe=red!75!black,  
fonttitle=\bfseries,title=The four corners of a paper,  
overlay={\draw[red!50!white,line width=1mm,opacity=0.5,shorten >=3mm]  
(frame.north west) edge[->] (current page.north west)  
(frame.north east) edge[->] (current page.north east)  
(frame.south west) edge[->] (current page.south west)  
(frame.south east) edge[->] (current page.south east);}]  
This is a tcolorbox.  
\end{tcolorbox}
```

The four corners of a paper

This is a tcolorbox.

/tcb/remember as=<name>

(style, no default, initially unset)

The `frame` node will be remembered by the given `<name>` to be referenced in other TikZ pictures.


```
% \usepackage{lipsum}
\newcolorbox{mybox}[1][]{enhanced,colframe=blue!75!black,colback=blue!10!white,
fonttitle=\bfseries,#1}

\begin{mybox}[title=First Box,nobeforeafter,width=\ linewidth/4,remember as=one]
This is a test.
\end{mybox}
\hfill
\begin{mybox}[title=Second Box,nobeforeafter,width=\ linewidth/4,remember as=two]
This is a test.
\end{mybox}
\hfill
\begin{mybox}[title=Third Box,nobeforeafter,width=\ linewidth/4,remember as=three]
This is a test.
\end{mybox}

\lipsum[2]

\begin{mybox}[title=Fourth Box,remember as=four]
This is a test.
\end{mybox}

\begin{tikzpicture}[overlay,remember picture,line width=1mm,draw=red!75!black]
\draw[->] (one.east) to[bend right] node[above] {A} (two.west);
\draw[->] (two.east) to[bend left] node[above] {B} (three.west);
\draw[->] (three.east) to[bend left=90] node[right] {C} (four.east);
\draw[->] (four.west) to[bend left=90] node[left] {D} (one.west);
\end{tikzpicture}
```

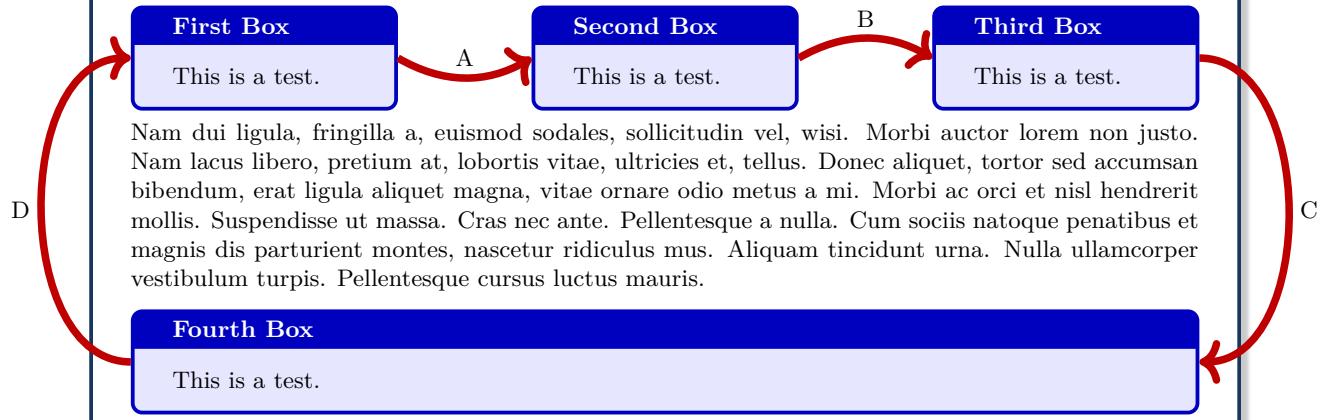

## 10.8 Underlay Option Keys

Underlays are quite similar to overlays described in 4.12 on page 83. Underlays are drawn *after* the frame and interior are drawn and *before* overlays and the text content is drawn; see 9.4 on page 165 for the general drawing scheme.

The differences between underlays and overlays are:

- Underlays are not applicable for the skins `standard`<sup>→ P. 233</sup> and `standard jigsaw`<sup>→ P. 234</sup>, whereas overlays are applicable also for these skins. The skin `spartan`<sup>→ P. 279</sup> supports underlays but no overlays.



If an underlay is used with the `standard`<sup>→ P. 233</sup> skin, it is silently ignored.

- Underlays are stackable, i.e. several different underlays can be used on the same `tcolorbox`. Overlays are not stackable by default (but with some help of the library `LIB hooks`).
- Boxed titles are implemented with underlays (10.2 on page 180), watermarks are implemented with overlays (10.3 on page 191).

`/tcb/underlay=<graphical code>` (no default, initially unset)

Adds `<graphical code>` to the box drawing process. This `<graphical code>` is drawn *after* the frame and interior and *before* the text content.

```
\newtcolorbox{mybox}[1][]{enhanced,colback=red!5!white,
  colbacktitle=red!85!black!50!white,
  colframe=red!75!black,fonttitle=\bfseries,watermark color=yellow!50!white,
  underlay={\begin{tcbclipinterior}
    \draw[red!40!white,line width=1cm] (interior.south west)--(interior.north east);
  \end{tcbclipinterior}},
  attach boxed title to top center={yshift=-2mm},#1}

\begin{mybox}[title=My box,watermark text=My Watermark]
\lipsum[2]
\end{mybox}
```

My box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

`/tcb/no underlay`

(style, no default, initially set)

Removes the underlay if set before.

**/tcb/underlay broken=***<graphical code>* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> and is broken actually, then the *<graphical code>* is added to the box drawing process. **/tcb/underlay**<sup>→ P. 221</sup> overwrites this key.

**/tcb/underlay unbroken=***<graphical code>* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> but is not broken actually or if the box is set to be **/tcb/unbreakable**<sup>→ P. 409</sup>, then the *<graphical code>* is added to the box drawing process. **/tcb/underlay**<sup>→ P. 221</sup> overwrites this key.

**/tcb/no underlay unbroken** (style, no default, initially set)

Removes the unbroken underlay if set before.

**/tcb/underlay first=***<graphical code>* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> and is broken actually, then the *<graphical code>* is added to the box drawing process for the *first* part of the break sequence. **/tcb/underlay**<sup>→ P. 221</sup> overwrites this key.

**/tcb/no underlay first** (style, no default, initially set)

Removes the first underlay if set before.

**/tcb/underlay middle=***<graphical code>* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> and is broken actually, then the *<graphical code>* is added to the box drawing process for the *middle* parts (if any) of the break sequence. **/tcb/underlay**<sup>→ P. 221</sup> overwrites this key.

**/tcb/no underlay middle** (style, no default, initially set)

Removes the middle underlay if set before.

**/tcb/underlay last=***<graphical code>* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> and is broken actually, then the *<graphical code>* is added to the box drawing process for the *last* part of the break sequence. **/tcb/underlay**<sup>→ P. 221</sup> overwrites this key.

**/tcb/no underlay last** (style, no default, initially set)

Removes the last underlay if set before.

**/tcb/underlay boxed title=***<graphical code>* (no default, initially unset)

If the box has a *boxed title*, see 10.2 on page 180, then the *<graphical code>* is added to the box drawing process *before* the boxed title is drawn.

**/tcb/no underlay boxed title** (style, no default, initially set)

Removes the boxed title underlay if set before.

**/tcb/underlay unbroken and first=***<graphical code>* (no default, initially unset)

This is an abbreviation for setting **/tcb/underlay unbroken** and **/tcb/underlay first** together. **/tcb/underlay**<sup>→ P. 221</sup> overwrites this key.

**/tcb/underlay middle and last=***<graphical code>* (no default, initially unset)

This is an abbreviation for setting **/tcb/underlay middle** and **/tcb/underlay last** together. **/tcb/underlay**<sup>→ P. 221</sup> overwrites this key.

**/tcb/underlay unbroken and last=***<graphical code>* (no default, initially unset)

This is an abbreviation for setting **/tcb/underlay unbroken** and **/tcb/underlay last** together. **/tcb/underlay**<sup>→ P. 221</sup> overwrites this key.

**/tcb/underlay first and middle=***<graphical code>* (no default, initially unset)

This is an abbreviation for setting **/tcb/underlay first** and **/tcb/underlay middle** together. **/tcb/underlay**<sup>→ P. 221</sup> overwrites this key.

## 10.9 Finish Option Keys

Finishes are quite similar to underlays described in 10.8 on page 221 and overlays described in 4.12 on page 83. Finishes are drawn *after* the text content is drawn; see 9.4 on page 165 for the general drawing scheme. Therefore, a finish will reduce the readability of the text content.

Finishes are intended for special effects like highlights or glosses or text over text.

- Finishes are only applicable for the skins `enhanced`<sup>→ P. 235</sup>, `empty`<sup>→ P. 269</sup>, `freelance`<sup>→ P. 282</sup>, `bicolor`<sup>→ P. 247</sup>, `beamer`<sup>→ P. 262</sup>, and `widget`<sup>→ P. 266</sup>.



If a finish is used with the `standard`<sup>→ P. 233</sup> skin, it is silently ignored.

- Finishes are stackable, i. e. several different finishes can be used on the same `tcolorbox`.

**/tcb/finish=⟨graphical code⟩** (no default, initially unset)

Adds ⟨graphical code⟩ to the box drawing process. This ⟨graphical code⟩ is drawn *after* the text content.

```
\newtcolorbox{mybox}[1][]{enhanced,colback=red!5!white,
  colbacktitle=red!85!black!50!white,colframe=red!75!black,fonttitle=\bfseries,
  finish={\begin{tcbclipframe}
    \path[bottom color=black,top color=black!50!white,opacity=0.1]
      (frame.south west) -- (frame.south east) -- (frame.north east) -- cycle;
    \path[top color=white,bottom color=black!50!white,opacity=0.1]
      (frame.south west) -- (frame.north east) -- (frame.north west) -- cycle;
  \end{tcbclipframe}},#1}

\begin{mybox}[title=My box]
\lipsum[2]
\end{mybox}
```

### My box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
\newtcolorbox{mybox}[1][]{enhanced,colback=red!5!white,
  colbacktitle=red!85!black!50!white,colframe=red!75!black,fonttitle=\bfseries,
  finish={\node[draw,fill=white,fill opacity=0.85,inner sep=5mm,
    rounded corners] at (frame.center) {\Huge\bfseries Finish!};},#1}

\begin{mybox}[title=My box]
\lipsum[2]
\end{mybox}
```

### My box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

**/tcb/no finish** (style, no default, initially set)

Removes the finish if set before.

**/tcb/finish broken=***(graphical code)* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> and *is* broken actually, then the *(graphical code)* is added to the box drawing process. **/tcb/finish**<sup>→ P. 223</sup> overwrites this key.

**/tcb/finish unbroken=***(graphical code)* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> but *is not* broken actually or if the box is set to be **/tcb/unbreakable**<sup>→ P. 409</sup>, then the *(graphical code)* is added to the box drawing process. **/tcb/finish**<sup>→ P. 223</sup> overwrites this key.

**/tcb/no finish unbroken** (style, no default, initially set)

Removes the unbroken finish if set before.

**/tcb/finish first=***(graphical code)* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> and *is* broken actually, then the *(graphical code)* is added to the box drawing process for the *first* part of the break sequence. **/tcb/finish**<sup>→ P. 223</sup> overwrites this key.

**/tcb/no finish first** (style, no default, initially set)

Removes the first finish if set before.

**/tcb/finish middle=***(graphical code)* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> and *is* broken actually, then the *(graphical code)* is added to the box drawing process for the *middle* parts (if any) of the break sequence. **/tcb/finish**<sup>→ P. 223</sup> overwrites this key.

**/tcb/no finish middle** (style, no default, initially set)

Removes the middle finish if set before.

**/tcb/finish last=***(graphical code)* (no default, initially unset)

If the box is set to be **/tcb/breakable**<sup>→ P. 408</sup> and *is* broken actually, then the *(graphical code)* is added to the box drawing process for the *last* part of the break sequence. **/tcb/finish**<sup>→ P. 223</sup> overwrites this key.

**/tcb/no finish last** (style, no default, initially set)

Removes the last finish if set before.

**/tcb/finish unbroken and first=***(graphical code)* (no default, initially unset)

This is an abbreviation for setting **/tcb/finish unbroken** and **/tcb/finish first** together. **/tcb/finish**<sup>→ P. 223</sup> overwrites this key.

**/tcb/finish middle and last=***(graphical code)* (no default, initially unset)

This is an abbreviation for setting **/tcb/finish middle** and **/tcb/finish last** together. **/tcb/finish**<sup>→ P. 223</sup> overwrites this key.

**/tcb/finish unbroken and last=***(graphical code)* (no default, initially unset)

This is an abbreviation for setting **/tcb/finish unbroken** and **/tcb/finish last** together. **/tcb/finish**<sup>→ P. 223</sup> overwrites this key.

**/tcb/finish first and middle=***(graphical code)* (no default, initially unset)

This is an abbreviation for setting **/tcb/finish first** and **/tcb/finish middle** together. **/tcb/finish**<sup>→ P. 223</sup> overwrites this key.

## 10.10 Hyper Option Keys

All options of this section need the package `hyperref`<sup>→ CTAN</sup> [16] to be loaded separately. All these options are implemented as `/tcb/finish`<sup>→ P. 223</sup> and can be disabled by `/tcb/no finish`<sup>→ P. 224</sup>.

! If the package `hyperref`<sup>→ CTAN</sup> [16] is not loaded or if the `standard`<sup>→ P. 233</sup> skin is used, all hyper option are silently ignored.

N 2017-02-03

`/tcb/hyperref=<marker>` (no default, initially unset)

The whole *frame* of a `tcolorbox` is made an active hyperlink for a *<marker>* which was given by `\label` or `/tcb/label`<sup>→ P. 114</sup> or `/tcb/phantomlabel`<sup>→ P. 114</sup>. Such, the `tcolorbox` is made a clickable button (depending on the previewer).

```
% \section{Library skins}\label{sec:skins}%
\begin{tcolorbox}[beamer,colback=red!50,
hyperref=sec:skins]
Jump to the heading of Section~\ref*{sec:skins}.
\end{tcolorbox}
```

Jump to the heading of Section 10.

N 2017-02-03

`/tcb/hyperref interior=<marker>` (no default, initially unset)

Identical to `/tcb/hyperref`, but only the *interior* of a `tcolorbox` is made a hyperlink (without frame and title).

N 2017-02-03

`/tcb/hyperref title=<marker>` (no default, initially unset)

Identical to `/tcb/hyperref`, but only the *title* of a `tcolorbox` is made a hyperlink.

N 2017-02-03

`/tcb/hyperref node={<marker>}{{<node>}}` (no default, initially unset)

Identical to `/tcb/hyperref`, but only the given TikZ *<node>* is made a hyperlink. This *<node>* may be `frame`, `interior`, `title`, or any other named node used for drawing the `tcolorbox`. The *<node>* may be defined inside `/tcb/underlay`<sup>→ P. 221</sup>, `/tcb/overlay`<sup>→ P. 83</sup> or `/tcb/finish`<sup>→ P. 223</sup>. If the later is used, define the node *before* `/tcb/hyperref node` is applied.

```
% \section{Library skins}\label{sec:skins}%
\begin{tcolorbox}[enhanced,colback=yellow!10,
underlay={\node[red,fill=red!30,inner sep=3mm]
(click) at (frame.center) {X};},
hyperref node={sec:skins}{click}]
Jump to the heading of Section~\ref*{sec:skins}
(X marks the click point).
\end{tcolorbox}
```

Jump to the heading of Section 10  
(X marks the click point).

N 2017-02-03

`/tcb/hyperlink=<marker>` (no default, initially unset)

The whole *frame* of a `tcolorbox` is make an active hyperlink for a *<marker>* which was given by `\hypertarget` or `/tcb/hypertarget`<sup>→ P. 117</sup>. Such, the `tcolorbox` is made a clickable button (depending on the previewer).

```
% \usepackage{hyperref}%
\begin{tcolorbox}[enhanced,
colback=blue!10,colframe=blue!50!black,
hypertarget=hypertwinB,
hyperlink=hypertwinA,
title=Box B]
Click me to jump to Box A.
\end{tcolorbox}
```

Box B

Click me to jump to Box A.

N 2017-02-03	<code>/tcb/hyperlink interior=&lt;marker&gt;</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperlink</code> <sup>P. 225</sup> , but only the <i>interior</i> of a <b>tcolorbox</b> is made a hyperlink (without frame and title).	
N 2017-02-03	<code>/tcb/hyperlink title=&lt;marker&gt;</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperlink</code> <sup>P. 225</sup> , but only the <i>title</i> of a <b>tcolorbox</b> is made a hyperlink.	
N 2017-02-03	<code>/tcb/hyperlink node={&lt;marker&gt;}{{&lt;node&gt;}}</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperlink</code> <sup>P. 225</sup> , but only the given TikZ <i>&lt;node&gt;</i> is made a hyperlink. This <i>&lt;node&gt;</i> may be <code>frame</code> , <code>interior</code> , <code>title</code> , or any other named node used for drawing the <b>tcolorbox</b> . The <i>&lt;node&gt;</i> may be defined inside <code>/tcb/underlay</code> <sup>P. 221</sup> , <code>/tcb/overlay</code> <sup>P. 83</sup> or <code>/tcb/finish</code> <sup>P. 223</sup> . If the later is used, define the node <i>before</i> <code>/tcb/hyperlink node</code> is applied.	
N 2017-02-03	<code>/tcb/hyperurl={&lt;url&gt;}</code>	(no default, initially unset)
	The whole <i>frame</i> of a <b>tcolorbox</b> is make an active hyperlink for an <i>&lt;url&gt;</i> in the same manner as using <code>\href</code> or <code>\url</code> . Such, the <b>tcolorbox</b> is made a clickable button (depending on the previewer).	
	<pre>\begin{tcolorbox}[enhanced,colback=red!50, hyperurl=https://www.ctan.org/pkg/tcolorbox] View CTAN with a browser. \end{tcolorbox}</pre>	View CTAN with a browser.
N 2017-02-03	<code>/tcb/hyperurl interior=&lt;url&gt;</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperurl</code> , but only the <i>interior</i> of a <b>tcolorbox</b> is made a hyperlink (without frame and title).	
N 2017-02-03	<code>/tcb/hyperurl title=&lt;url&gt;</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperurl</code> , but only the <i>title</i> of a <b>tcolorbox</b> is made a hyperlink.	
N 2017-02-03	<code>/tcb/hyperurl node={&lt;url&gt;}{{&lt;node&gt;}}</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperurl</code> , but only the given TikZ <i>&lt;node&gt;</i> is made a hyperlink. This <i>&lt;node&gt;</i> may be <code>frame</code> , <code>interior</code> , <code>title</code> , or any other named node used for drawing the <b>tcolorbox</b> . The <i>&lt;node&gt;</i> may be defined inside <code>/tcb/underlay</code> <sup>P. 221</sup> , <code>/tcb/overlay</code> <sup>P. 83</sup> or <code>/tcb/finish</code> <sup>P. 223</sup> . If the later is used, define the node <i>before</i> <code>/tcb/hyperurl node</code> is applied.	
N 2017-02-03	<code>/tcb/hyperurl*={&lt;options&gt;}{{&lt;url&gt;}}</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperurl</code> , but additional <code>\hyperref[16]</code> <i>&lt;options&gt;</i> are applied.	
	<pre>\begin{tcolorbox}[enhanced,colback=green!50, hyperurl*={page=3,pdfnewwindow=true}% [tcolorbox-example.pdf]} Open example file on Page~3. \end{tcolorbox}</pre>	Open example file on Page 3.
N 2017-02-03	<code>/tcb/hyperurl* interior={&lt;options&gt;}{{&lt;url&gt;}}</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperurl interior</code> , but additional <code>\hyperref[16]</code> <i>&lt;options&gt;</i> are applied.	
N 2017-02-03	<code>/tcb/hyperurl* title={&lt;options&gt;}{{&lt;url&gt;}}</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperurl title</code> , but additional <code>\hyperref[16]</code> <i>&lt;options&gt;</i> are applied.	
N 2017-02-03	<code>/tcb/hyperurl* node={&lt;options&gt;}{{&lt;url&gt;}}{{&lt;node&gt;}}</code>	(no default, initially unset)
	Identical to <code>/tcb/hyperurl node</code> , but additional <code>\hyperref[16]</code> <i>&lt;options&gt;</i> are applied.	

## 10.11 Jigsaw Skin Variants

As described in 9.1 on page 157, a `tcolorbox` is drawn by up to four *engines*. Typically, the `frame` engine fills the complete box area with color and the other engines fill certain areas with other colors. Finally, only the area which you see as *frame* of the box will display the frame color. For most applications, this is a good approach.

For certain boxes, a more delicate procedure is needed. E.g., if the box should be translucent, an already painted area cannot be made unpainted. Therefore, more elaborate frame engines saw holes into the frame where the interior area and optionally the title area will be painted. The resulting skins are called *jigsaw* skins. For `standard`<sup>→ P. 233</sup>, `enhanced`<sup>→ P. 235</sup>, and `bicolor`<sup>→ P. 247</sup>, there are variants called `standard jigsaw`<sup>→ P. 234</sup>, `enhanced jigsaw`<sup>→ P. 241</sup>, and `bicolor jigsaw`<sup>→ P. 254</sup>.

```
\newcommand{\ballexample}{\begin{tikzpicture}
  \path [use as bounding box] (0,0.8) rectangle +(0.1,0.1);
  \shadedraw [shading=ball] (0,0) circle (1cm);
  \shadedraw [ball color=red] (3,-2.2) circle (1cm);
\end{tikzpicture}

\tcbset{enhanced,colback=blue!5!white,
  frame style={left color=red!75!black,right color=red!10!yellow},
  fonttitle=\bfseries }

\ballexample

\begin{tcolorbox}[title=A normal box]
  \lipsum[2]
\end{tcolorbox}

\ballexample

\begin{tcolorbox}[title=A translucent jigsaw box,
  enhanced jigsaw,opacityback=0.35]
  \lipsum[2]
\end{tcolorbox}
```

### A normal box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### A translucent jigsaw box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
\tcbset{enhanced,colback=red!10!white,coltitle=black,
frame style={left color=red!75!black,right color=red!10!yellow},
fonttitle=\bfseries,interior hidden,title hidden}

\begin{tcolorbox}[title=A normal box with hidden interior and title]
This is a tcolorbox.
\end{tcolorbox}

\begin{tcolorbox}[enhanced jigsaw,
title=A jigsaw box with hidden interior and title]
This is a tcolorbox.
\end{tcolorbox}
```

A normal box with hidden interior and title

This is a tcolorbox.

A jigsaw box with hidden interior and title

This is a tcolorbox.

```
\newtcolorbox{mybox}{skin=enhancedmiddle jigsaw,leftrule=5mm,rightrule=5mm,
boxsep=0mm,top=0mm,bottom=0mm,
frame style={top color=blue,bottom color=red},interior hidden}

\begin{mybox}
\lipsum[2]
\end{mybox}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

## 10.12 Draft Mode

To reduce the compilation time while drafting a document, the *draft mode* can be applied. Basically, it changes all skins to `spartan`<sup>→ P. 279</sup> and sets the `/tcb/fit algorithm`<sup>→ P. 468</sup> to `squeeze`. Especially, when fuzzy shadows are used, the speedup will be considerable high.

! It is strongly recommended that the draft mode is *not* used for the final document. Use `spartan`<sup>→ P. 279</sup> directly, if you want to stay with it. The draft mode implementation may change in future.

! Normally, switching to the draft mode should not alter the geometry of your document. Since overlays are deactivated, any code placed there (e.g. counter changes) is not executed anymore! Also, `/tcb/remember as`<sup>→ P. 220</sup> will not have any effect. You may exclude critical code with `\tcbinterruptdraftmode` / `\tcbcontinuedraftmode` from converting to draft mode.

### `\tcbstartdraftmode`

Any following `tcolorbox` code is put into *draft mode*. All skin settings are overruled with `spartan`<sup>→ P. 279</sup>. Overlays, watermarks, shadows, borderlines, and rounded corners are deactivated for all `tcolorbox` layers.

### `\tcbstopdraftmode`

The *draft mode* is deactivated for the following code.

### `\tcbinterruptdraftmode`

If the compilation is in *draft mode*, the *draft mode* is deactivated until a following `\tcbcontinuedraftmode` is detected.

If the compilation is not in *draft mode*, nothing happens and a following `\tcbcontinuedraftmode` will not start the *draft mode*.

! The pair `\tcbinterruptdraftmode` and `\tcbcontinuedraftmode` cannot be used nested.

### `\tcbcontinuedraftmode`

Continues the *draft mode* which was suspended by a preceding `\tcbinterruptdraftmode`. Nothing happens, if there was no draft mode before `\tcbinterruptdraftmode`.

! Code, which is place between `\tcbinterruptdraftmode` and `\tcbcontinuedraftmode` is shielded from *draft mode*.

/tcb/draftmode=true|false

(default true, initially false)

If set to `true`, the *draft mode* is started. If set to `false`, the *draft mode* is stopped.

```
\newtcolorbox{mybeamer}[2][]{beamer,colback=Salmon!50!white,  
colframe=FireBrick!75!black,adjusted title={#2},#1}  
  
\begin{mybeamer}{Beamer box}  
This box looks like a box provided by the \texttt{beamer} class.  
\end{mybeamer}\par\medskip  
\begin{mybeamer}[draftmode]{Beamer box}  
This box looks like a box provided by the \texttt{beamer} class.  
\end{mybeamer}
```

### Beamer box

This box looks like a box provided by the `beamer` class.

### Beamer box

This box looks like a box provided by the `beamer` class.

## 11 Library `\skins` - Catalog of Skins

The `\skins` library provides a catalog of skins to choose from which is documented in the following. The `\skins` library has to be loaded by a package option or inside the preamble by:

```
\tcbuselibrary{skins}
```

See 10 on page 172 for the documentation of all other options of the `\skins` library.

- In principle, a skin is applied by choosing a value for `/tcb/skin`<sup>→ P. 157</sup>, e.g. `enhanced`. Since the parts of a breakable box should look different, there are individual skins for breakable boxes, also see 19.8 on page 422. Skins for breakable boxes derived from a base skin are called a skin family in the following.
- Instead of setting values for `/tcb/skin`<sup>→ P. 157</sup>, equally named options can be used which are shortcuts and which sometimes also change some geometry or style settings. These are the intended options for normal users. Typically, one of the following options is sufficient to select a skin:

- `/tcb/standard`<sup>→ P. 233</sup>
- `/tcb/standard jigsaw`<sup>→ P. 234</sup>
- `/tcb/enhanced`<sup>→ P. 235</sup>
- `/tcb/enhanced jigsaw`<sup>→ P. 241</sup>
- `/tcb/enhanced standard`<sup>→ P. 237</sup>
- `/tcb/enhanced standard jigsaw`<sup>→ P. 241</sup>
- `/tcb/bicolor`<sup>→ P. 248</sup>
- `/tcb/tile`<sup>→ P. 258</sup>
- `/tcb/beamer`<sup>→ P. 262</sup>
- `/tcb/widget`<sup>→ P. 266</sup>
- `/tcb/empty`<sup>→ P. 269</sup>
- `/tcb/spartan`<sup>→ P. 279</sup>
- `/tcb/draft`<sup>→ P. 280</sup>

Additionally, there are some special applications:

- `/tcb/marker`<sup>→ P. 243</sup>
- `/tcb/blank`<sup>→ P. 237</sup>
- `/tcb/blanker`<sup>→ P. 270</sup>
- `/tcb/blankest`<sup>→ P. 271</sup>

The auxiliary macro `\skinExampleSet` is used for the following examples to display skin applications. Note that `\skinExampleSet` is not part of the package, but is defined just for this documentation.

```
\NewDocumentCommand{\skinExampleSet}{m}{%
    \begin{tcbraster}[raster equal height,raster columns=3,
        colback=LightGreen,colframe=DarkGreen,colbacktitle=LimeGreen!75!DarkGreen,
        #1,
        left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm,
        sidebyside gap=4mm]
        \begin{tcolorbox}
            This is my content.
        \end{tcolorbox}
        \begin{tcolorbox}
            This is my content.
            \tcblower
            More content.
        \end{tcolorbox}
        \begin{tcolorbox}[sidebyside]
            My content.
            \tcblower
            More content.
        \end{tcolorbox}
        \begin{tcolorbox}[adjusted title=My title]
            This is my content.
        \end{tcolorbox}
        \begin{tcolorbox}[adjusted title=My title]
            This is my content.
            \tcblower
            More content.
        \end{tcolorbox}
        \begin{tcolorbox}[adjusted title=My title,sidebyside]
            My content.
            \tcblower
            More content.
        \end{tcolorbox}
    \end{tcbraster}
}
```

## 11.1 Skin Family “standard”



Note that the option keys `/tcb/frame style`<sup>→ P. 172</sup>, `/tcb/interior style`<sup>→ P. 173</sup>, `/tcb/segmentation style`<sup>→ P. 175</sup>, and `/tcb/title style`<sup>→ P. 175</sup> are not applicable to the standard skin. Also, watermarks (see Subsection 10.3) are not usable with the standard skin.

### `/tcb/skin=standard`

(skin)

This is the standard skin from the core package. All drawing engines are set to type `standard`. The drawing is based on `pgf` commands and does not need the `tikz` package.

#### Environment and engines for the skin “standard”


<code>/tcb/frame engine</code> <sup>→ P. 158</sup> :	<code>standard</code>
<code>/tcb/interior titled engine</code> <sup>→ P. 158</sup> :	<code>standard</code>
<code>/tcb/interior engine</code> <sup>→ P. 159</sup> :	<code>standard</code>
<code>/tcb/segmentation engine</code> <sup>→ P. 159</sup> :	<code>standard</code>
<code>/tcb/title engine</code> <sup>→ P. 159</sup> :	<code>standard</code>

### `/tcb/standard`

(style, no value)

This is an abbreviation for setting `skin=standard`.

`\skinExampleSet{standard}`

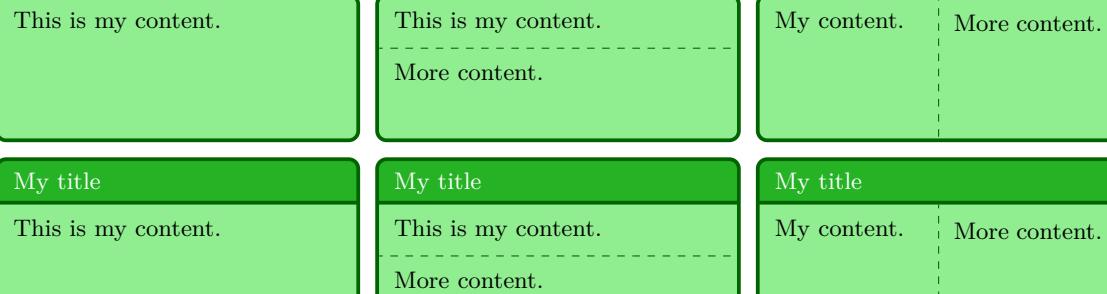

/tcb/skin=standard jigsaw

(skin)

This is the standard jigsaw skin from the core package. It differs from the skin [standard](#)<sup>P. 233</sup> by its frame engine, see [10.11](#) on page 227.

#### Environment and engines for the skin “standard jigsaw”


```
/tcb/frame engineP. 158: standardjigsaw  
/tcb/interior titled engineP. 158: standard  
/tcb/interior engineP. 159: standard  
/tcb/segmentation engineP. 159: standard  
/tcb/title engineP. 159: standard
```

/tcb/standard jigsaw

(style, no value)

This is an abbreviation for setting `skin=standard jigsaw`.

```
\skinExampleSet{standard jigsaw,  
    opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,  
}
```

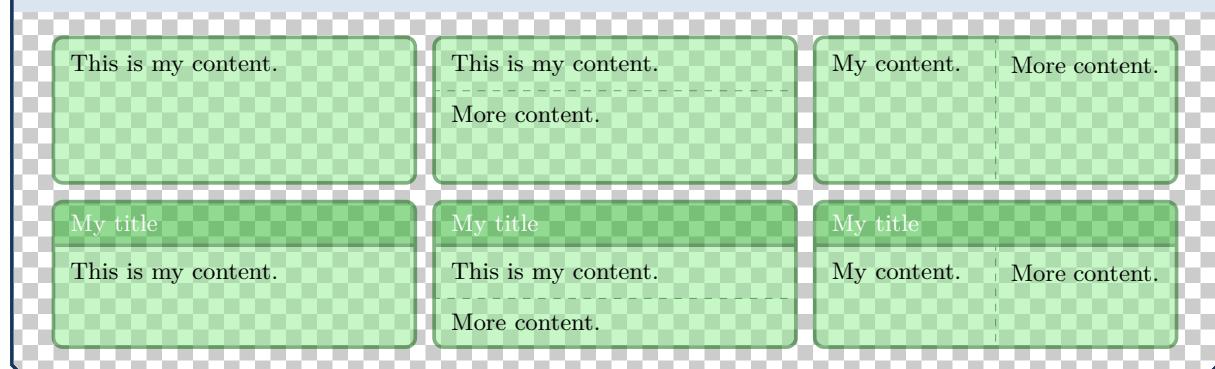

## 11.2 Skin Family “enhanced”

! If you like the standard appearance of a `tcolorbox` but you want to have some “enhanced” features, the `enhanced` skin is what you are looking for.

`/tcb/skin=enhanced` (skin)

This skin translates the drawing commands of the core package into `tikz` path commands. Therefore, it allows all `tikz` high level options for these paths and has more flexibility compared to the `standard`<sup>P. 233</sup> skin. You pay for this with some prolonged compilation time. The `tikz` path options can be given with the option keys `/tcb/frame style`<sup>P. 172</sup>, `/tcb/interior style`<sup>P. 173</sup>, `/tcb/segmentation style`<sup>P. 175</sup>, and `/tcb/title style`<sup>P. 175</sup>.

### Environment and engines for the skin “enhanced”

```
/tcb/frame engineP. 158: path
/tcb/interior titled engineP. 158: path
/tcb/interior engineP. 159: path
/tcb/segmentation engineP. 159: path
/tcb/title engineP. 159: path
```

`/tcb/enhanced` (style, no value)

This is an abbreviation for setting `skin=enhanced`.

```
\skinExampleSet{enhanced}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

```
% \usetikzlibrary{shadings}           % preamble
\tcbset{skin=enhanced,fonttitle=\bfseries,
frame style={upper left=blue,upper right=red,lower left=yellow,lower right=green},
interior style={white,opacity=0.5},
segmentation style={black,solid,opacity=0.2,line width=1pt}}


\begin{tcolorbox}[title=Nice box in rainbow colors]
With the \enquote{enhanced} skin, it is quite easy to produce fancy looking effects.
\tcblower
Note that this is still a \texttt{\tcolorbox}.
\end{tcolorbox}
```

### Nice box in rainbow colors

With the “enhanced” skin, it is quite easy to produce fancy looking effects.

Note that this is still a `tcolorbox`.

```
% \usetikzlibrary{decorations.pathmorphing} % preamble
\tcbset{skin=enhanced,fonttitle=\bfseries,boxrule=1mm,
frame style={draw=FireBrick,fill=Salmon},drop fuzzy shadow,
interior style={draw=FireBrick,top color=Salmon!10,bottom color=Salmon!20},
segmentation style={draw=FireBrick,solid,decorate,
decoration={coil,aspect=0,segment length=10.1mm}}}

\begin{tcblisting}{title=A listing box with shadow and some specials}
Of course, skins can be used for listings also.
\begin{equation}
\int\limits_1^2 \frac{1}{x} dx = \ln(2).
\end{equation}
\end{tcblisting}
```

### A listing box with shadow and some specials

Of course, skins can be used for listings also.

$$\int\limits_1^2 \frac{1}{x} dx = \ln(2).$$

Of course, skins can be used for listings also.

$$\int\limits_1^2 \frac{1}{x} dx = \ln(2). \tag{2}$$

**/tcb/enhanced standard**

(style, no value)

For unbreakable boxes, this is identical to using [/tcb/enhanced](#)<sup>→ P. 235</sup>. But, for breakable boxes, the *break sequence* is identical to the [standard](#)<sup>→ P. 233</sup> skin, see Section 19.8 from page 422.

**/tcb/blank**

(style, initially unset)

This style relies on the skin [enhanced](#)<sup>→ P. 235</sup>. All drawing operations are hidden and all margins are set to 0pt. See [/tcb/blanker](#)<sup>→ P. 270</sup> for switching off the drawing engines.

```
\begin{tcolorbox}[blank,watermark text=A blank box]
\lipsum[1]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### \tcbline

Sometimes, a line is only a line. With `\tcblower→ P.12` you separate the box content into two functional units. `\tcbline` draws only a line which looks like the segmentation line between upper and lower part. Furthermore, you can use `\tcbline` more than just once. `\tcbline` always uses the path drawing engine. Therefore, the `/tcb/segmentation style→ P.175` can be applied.

```
\tcbset{enhanced,colframe=blue!50!black,colback=white}

\begin{tcolorbox}[colupper=red!50!black,collower=green!50!black]
\lipsum[1]
\tcbline
\lipsum[2]
\tcblower
\lipsum[3]
\tcbline
\lipsum[4]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placemat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

### \tcbline\*


Equivalent to `\tcbline`, but in a breakable box, `\tcbline*` is removed if at a page/box break. Also, it is removed at the end of a box.

This is a flavor of `enhanced`<sup>→ P. 235</sup> which is used as a *first* part in a break sequence for `enhanced`<sup>→ P. 235</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin “enhancedfirst”

```
/tcb/frame engine→ P. 158: pathfirst
/tcb/interior titled engine→ P. 158: pathfirst
/tcb/interior engine→ P. 159: pathfirst
/tcb/segmentation engine→ P. 159: path
/tcb/title engine→ P. 159: pathfirst
```

```
\skinExampleSet{skin=enhancedfirst}
```

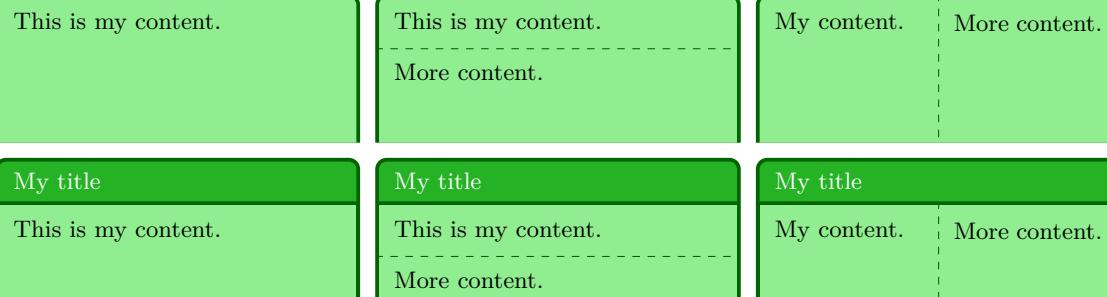


This is a flavor of `enhanced`<sup>→ P. 235</sup> which is used as a *middle* part in a break sequence for `enhanced`<sup>→ P. 235</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin “enhancedmiddle”

```
/tcb/frame engine→ P. 158: pathmiddle
/tcb/interior titled engine→ P. 158: pathmiddle
/tcb/interior engine→ P. 159: pathmiddle
/tcb/segmentation engine→ P. 159: path
/tcb/title engine→ P. 159: pathmiddle
```

```
\skinExampleSet{skin=enhancedmiddle}
```

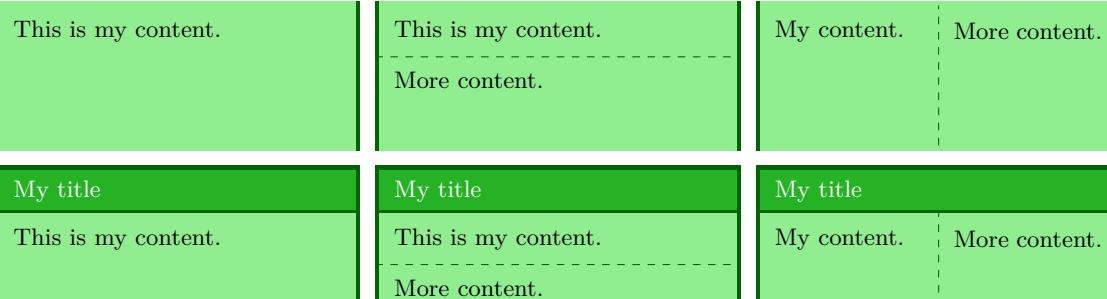

This is a flavor of `enhanced→ P. 235` which is used as a *last* part in a break sequence for `enhanced→ P. 235`. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “enhancedlast”

```
/tcb/frame engine→ P. 158: pathlast  
/tcb/interior titled engine→ P. 158: pathlast  
/tcb/interior engine→ P. 159: pathlast  
/tcb/segmentation engine→ P. 159: path  
/tcb/title engine→ P. 159: pathlast
```

```
\skinExampleSet{skin=enhancedlast}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

## /tcb/skin=enhanced jigsaw

(skin)

This is the jigsaw variant of skin [enhanced](#)<sup>P. 235</sup>. It differs by its frame engine, see 10.11 on page 227.

### Environment and engines for the skin “enhanced jigsaw”


```
/tcb/frame engineP. 158: pathjigsaw  
/tcb/interior titled engineP. 158: path  
/tcb/interior engineP. 159: path  
/tcb/segmentation engineP. 159: path  
/tcb/title engineP. 159: path
```

## /tcb/enhanced jigsaw

(style, no value)

This is an abbreviation for setting `skin=enhanced jigsaw`.

```
\skinExampleSet{enhanced jigsaw,  
    opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,  
}
```

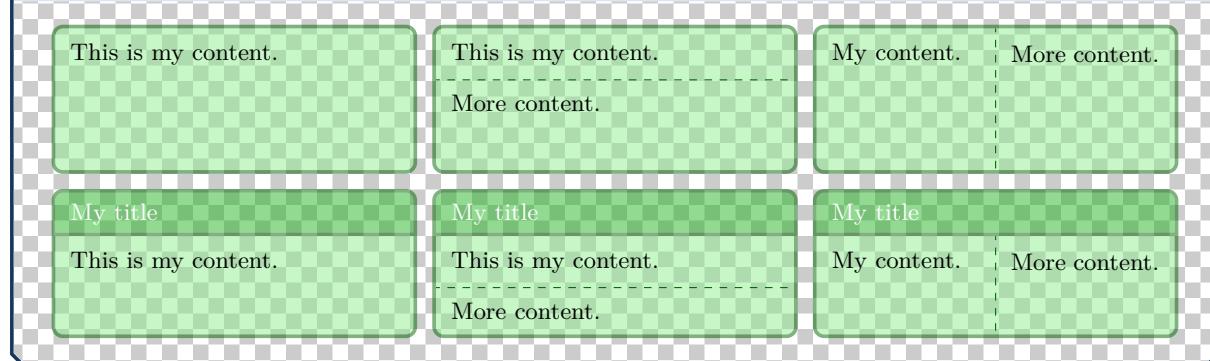

## N 2017-07-01 /tcb/enhanced standard jigsaw

(style, no value)


For unbreakable boxes, this is identical to using `/tcb/enhanced jigsaw`. But, for breakable boxes, the *break sequence* is identical to the `standard jigsaw`<sup>P. 234</sup> skin, see Section 19.8 from page 422.

This is the jigsaw variant of skin `enhancedfirst`<sup>→ P. 239</sup>. It differs by its frame engine, see 10.11 on page 227.

### Environment and engines for the skin “enhancedfirst jigsaw”

```
/tcb/frame engine→ P. 158: pathfirstjigsaw  
/tcb/interior titled engine→ P. 158: pathfirst  
/tcb/interior engine→ P. 159: pathfirst  
/tcb/segmentation engine→ P. 159: path  
/tcb/title engine→ P. 159: pathfirst
```

```
\skinExampleSet{skin=enhancedfirst jigsaw,  
    opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,  
}
```

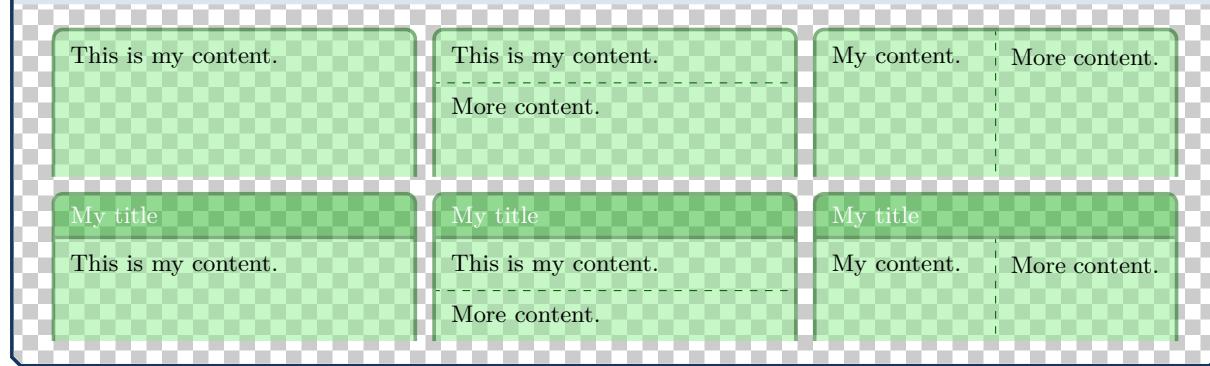

## /tcb/skin=enhancedmiddle jigsaw


(skin)

This is the jigsaw variant of skin `enhancedmiddle`<sup>→ P. 239</sup>. It differs by its frame engine, see 10.11 on page 227.

### Environment and engines for the skin “enhancedmiddle jigsaw”

/tcb/frame engine <sup>→ P. 158:</sup>	pathmiddlejigsaw
/tcb/interior titled engine <sup>→ P. 158:</sup>	pathmiddle
/tcb/interior engine <sup>→ P. 159:</sup>	pathmiddle
/tcb/segmentation engine <sup>→ P. 159:</sup>	path
/tcb/title engine <sup>→ P. 159:</sup>	pathmiddle

```
\skinExampleSet{skin=enhancedmiddle jigsaw,
  opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
}
```

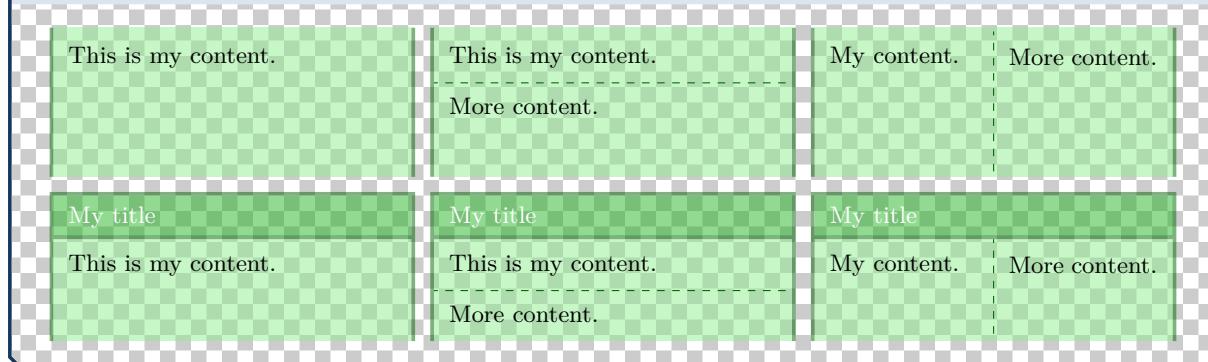

## /tcb/marker

(style, no value)

This styles relies on the skin `enhancedmiddle jigsaw`. It is intended to be used as an optical marker like a highlighter pen.

```
\begin{tcolorbox}[marker]
\lipsum[2]
\end{tcolorbox}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

This examples demonstrates the creation of several *text marker* environments based on [enhancedmiddle](#) → P. 239.

```
\tcbset{textmarker/.style={%
    skin=enhancedmiddle jigsaw,breakable,parbox=false,
    boxrule=0mm,leftrule=5mm,rightrule=5mm,boxsep=0mm,arc=0mm,outer arc=0mm,
    left=3mm,right=3mm,top=1mm,bottom=1mm,toptitle=1mm,bottomtitle=1mm,oversize}{}}

\newtcolorbox[yellow]{textmarker,colback=yellow!5!white,colframe=yellow}
\newtcolorbox[orange]{textmarker,colback=DarkOrange!5!white,
                     colframe=DarkOrange!75!yellow}
\newtcolorbox[red]{textmarker,colback=red!5!white,colframe=red}
\newtcolorbox[blue]{textmarker,colback=DeepSkyBlue!5!white,colframe=DeepSkyBlue}
\newtcolorbox[green]{textmarker,colback=Chartreuse!5!white,colframe=Chartreuse}
\newtcolorbox[rainbow]{textmarker,interior hidden,
                      frame style={top color=blue,bottom color=red,middle color=green}{}}

\begin{yellow}
\lipsum[1-3]
\end{yellow}

\begin{orange}
\lipsum[4]
\end{orange}

\begin{red}
\lipsum[5]
\end{red}

\begin{green}
\lipsum[6]
\end{green}

\begin{blue}
\lipsum[7]
\end{blue}

\begin{rainbow}
\lipsum[8]
\end{rainbow}
```

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique,

libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipisciing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipisciing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.


Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetur at, consectetur sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipisciing quis, ultricies a, dui.

This is the jigsaw variant of skin enhancedlast<sup>→ P. 240</sup>. It differs by its frame engine, see 10.11 on page 227.

### Environment and engines for the skin “enhancedlast”

```
/tcb/frame engine→ P. 158: pathlastjigsaw  
/tcb/interior titled engine→ P. 158: pathlast  
/tcb/interior engine→ P. 159: pathlast  
/tcb/segmentation engine→ P. 159: path  
/tcb/title engine→ P. 159: pathlast
```

```
\skinExampleSet{skin=enhancedlast jigsaw,  
    opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,  
}
```

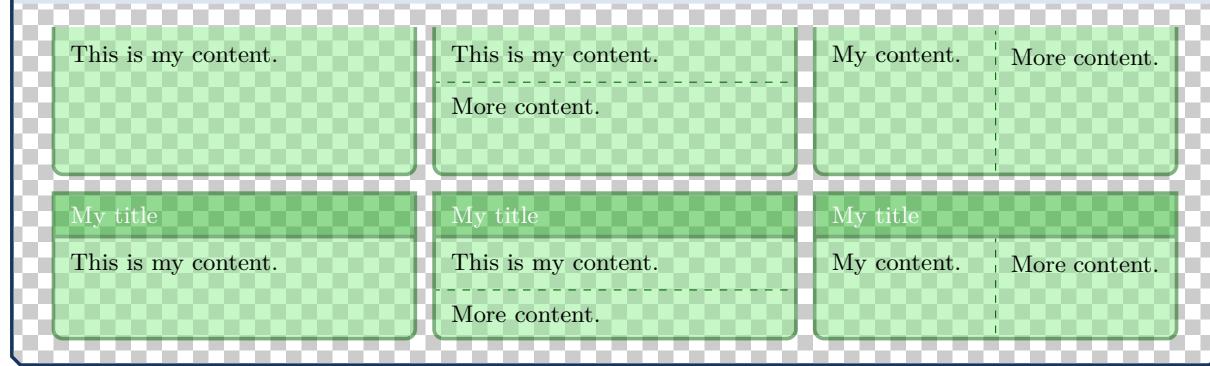

### 11.3 Skin Family “bicolor”

/tcb/skin=bicolor

(skin)

This skin is quite similar to the [standard](#)<sup>→ P. 233</sup> and [enhanced](#)<sup>→ P. 235</sup> skin. But instead of a segmentation line, the optional lower part of the box is filled with a different color or drawn with a different style.

#### Environment and engines for the skin “bicolor”

```
/tcb/frame engine→ P. 158: path
/tcb/interior titled engine→ P. 158: special
/tcb/interior engine→ P. 159: special
/tcb/segmentation engine→ P. 159: special
/tcb/title engine→ P. 159: path
```

- The most basic usage of this skin is to set the background color of the lower part by [/tcb/colbacklower](#)<sup>→ P. 249</sup> and all other options like for the [standard](#)<sup>→ P. 233</sup> skin.

```
\begin{tcolorbox}[skin=bicolor,title=The title,
  colframe=FireBrick!75!black,colback=Salmon!50!white,colbacklower=Salmon]
  The upper part.
  \tcblower
  The lower part.
\end{tcolorbox}
```

The title

The upper part.

The lower part.

- The more advanced usage of this skin is to apply the [/tcb/frame style](#)<sup>→ P. 172</sup> and the [/tcb/interior style](#)<sup>→ P. 173</sup> like for the [enhanced](#)<sup>→ P. 235</sup> skin. Also, the [/tcb/segmentation style](#)<sup>→ P. 175</sup> can be used, but it is applied to the whole lower part.

```
\begin{tcolorbox}[skin=bicolor,title=The title,
  frame style={top color=FireBrick,
    bottom color=FireBrick!15!white,draw=black},
  interior style={left color=Salmon,right color=Salmon!50!white},
  segmentation style={right color=Salmon,left color=Salmon!50!white}]
  The upper part.
  \tcblower
  The lower part.
\end{tcolorbox}
```

The title

The upper part.

The lower part.

/tcb/bicolor

(style, no value)

This is an abbreviation for setting skin=bicolor.

```
\skinExampleSet{bicolor,  
    colbacklower=LimeGreen!75!LightGreen,  
}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.



The following options `/tcb/colbacklower` and `/tcb-opacitybacklower` are executed before `/tcb/segmentation style`<sup>P. 175</sup>, i.e. `/tcb/segmentation style`<sup>P. 175</sup> overrules them.

`/tcb/colbacklower=<color>` (no default, initially `black!15!white`)

Sets the background `<color>` of the lower part. It depends on the skin, if this value is used.

```
\tcbset{gitexample/.style={listing and comment,comment={#1},
  skin=bicolor,boxrule=1mm,fonttitle=\bfseries,coltitle=black,
  frame style={draw=black,left color=Gold,right color=Goldenrod!50!Gold},
  colback=black,colbacklower=Goldenrod!75!Gold,
  colupper=white,collower=black,
  listing options={language={bash},aboveskip=0pt,belowskip=0pt,nolol,
  basicstyle=\ttfamily\bfseries,extendedchars=true}}}

\begin{tcblisting}{title={Snapshot of the staging area},
  gitexample={The option '-a' automatically stages all tracked and modified
    files before the commit.\par
    This can be combined with the message option '-m'
    as seen in the third line.}}
  git commit
  git commit -a
  git commit -am 'changes to my example'
\end{tcblisting}
```

#### Snapshot of the staging area

```
git commit
git commit -a
git commit -am 'changes to my example'
```

The option '-a' automatically stages all tracked and modified files before the commit.  
This can be combined with the message option '-m' as seen in the third line.

N 2021-05-21

`/tcb-opacitybacklower=<fraction>` (no default, initially 1.0)

Sets the background opacity of the lower part to the given `<fraction>`. It depends on the skin, if this value is used.

```
\begin{tcolorbox}[bicolor,
  frame style={preaction={fill=blue!50!black},
    pattern=checkerboard,pattern color=blue!50!gray},
  fonttitle=\bfseries, overlaplower=0mm,
  colback=blue!10, colbacklower=white, opacitybacklower=0.65,
  title={Example for a semilucent lower part}]
This is the upper part.
\tcblower
And that is the lower part.
\end{tcolorbox}
```

#### Example for a semilucent lower part

This is the upper part.

And that is the lower part.

N 2022-01-11

/tcb/overlaplower=<length>

(no default, initially 0.1mm)

The backgrounds of the lower parts for the skin families “bicolor”, “tile”, and “beamer” are drawn differently than the backgrounds of the upper parts. If the distance between these backgrounds of upper and lower parts is 0pt, some previewers show the frame color as thin line between upper and lower part. To avoid this glitch, the lower part is drawn with an overlap of <length> over the upper part.

This value can be adapted for special applications. For example, semilucent lower parts better use 0pt, see /tcb-opacitybacklower<sup>→ P. 249</sup>. Also see \tcboverlaplower for using a larger value.

N 2022-01-11

\tcboverlaplower

Macro which contains the length value set by /tcb/overlaplower. May be used for fine positioning at the segmentation between upper and lower part and should be seen *read-only*.

```
\begin{tcolorbox}[bicolor, sharp corners,
  colframe=blue!50!black, colback=blue!10, colbacklower=red!10,
  top=5mm, bottom=2mm, middle=3.5mm, overlaplower=1.5mm,
  underlay={
    \node[minimum width=1cm,minimum height=0.5cm,outer sep=auto,
      anchor=north east,fill=white] at (interior.north east)
      {\itshape\small upper};
    \node[minimum width=1cm,minimum height=0.5cm,outer sep=auto,
      anchor=north east,fill=white]
      at ([yshift=\tcboverlaplower]segmentation.east)
      {\itshape\small lower};
  }
]
```

This is the upper part.  
\tcblower  
And that is the lower part.  
\end{tcolorbox}

This is the upper part.

And that is the lower part.

upper

lower

This is a flavor of `bicolor`<sup>→ P. 247</sup> which is used as a *first* part in a break sequence for `bicolor`<sup>→ P. 247</sup>. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “bicolorfirst”

```
/tcb/frame engine→ P. 158: pathfirst
/tcb/interior titled engine→ P. 158: special
/tcb/interior engine→ P. 159: special
/tcb/segmentation engine→ P. 159: special
/tcb/title engine→ P. 159: pathfirst
```

```
\skinExampleSet{skin=bicolorfirst,
  colbacklower=LimeGreen!75!LightGreen,
}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

This is a flavor of `bicolor→ P. 247` which is used as a *middle* part in a break sequence for `bicolor→ P. 247`. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “bicolormiddle”

```
/tcb/frame engine→ P. 158: pathmiddle
/tcb/interior titled engine→ P. 158: special
/tcb/interior engine→ P. 159: special
/tcb/segmentation engine→ P. 159: special
/tcb/title engine→ P. 159: pathmiddle
```

```
\skinExampleSet{skin=bicolormiddle,
  colbacklower=LimeGreen!75!LightGreen,
}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content. More content.

This is a flavor of `bicolor`<sup>→ P. 247</sup> which is used as a *last* part in a break sequence for `bicolor`<sup>→ P. 247</sup>. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “bicolorlast”

```
/tcb/frame engine→ P. 158: pathlast  
/tcb/interior titled engine→ P. 158: special  
/tcb/interior engine→ P. 159: special  
/tcb/segmentation engine→ P. 159: special  
/tcb/title engine→ P. 159: pathlast
```

```
\skinExampleSet{skin=bicolorlast,  
    colbacklower=LimeGreen!75!LightGreen,  
}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

This is the jigsaw variant of skin [bicolor](#)<sup>→ P. 247</sup>. It differs by its frame engine, see 10.11 on page 227.

### Environment and engines for the skin “bicolor jigsaw”

/tcb/frame engine <sup>→ P. 158:</sup>	pathjigsaw
/tcb/interior titled engine <sup>→ P. 158:</sup>	<i>special</i>
/tcb/interior engine <sup>→ P. 159:</sup>	<i>special</i>
/tcb/segmentation engine <sup>→ P. 159:</sup>	<i>special</i>
/tcb/title engine <sup>→ P. 159:</sup>	path

This is an abbreviation for setting `skin=enhanced jigsaw`.

```
\skinExampleSet{bicolor jigsaw,
  colbacklower=LimeGreen!75!LightGreen,
  opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
  opacitybacklower=0.5,
}
```




This is the jigsaw variant of skin `bicolorfirst`<sup>→ P. 251</sup>. It differs by its frame engine, see 10.11 on page 227.

### Environment and engines for the skin “bicolorfirst jigsaw”

/tcb/frame engine <sup>→ P. 158:</sup>	pathfirstjigsaw
/tcb/interior titled engine <sup>→ P. 158:</sup>	<i>special</i>
/tcb/interior engine <sup>→ P. 159:</sup>	<i>special</i>
/tcb/segmentation engine <sup>→ P. 159:</sup>	<i>special</i>
/tcb/title engine <sup>→ P. 159:</sup>	pathfirst

```
\skinExampleSet{skin=bicolorfirst jigsaw,
  colbacklower=LimeGreen!75!LightGreen,
  opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
  opacitybacklower=0.5,
}
```

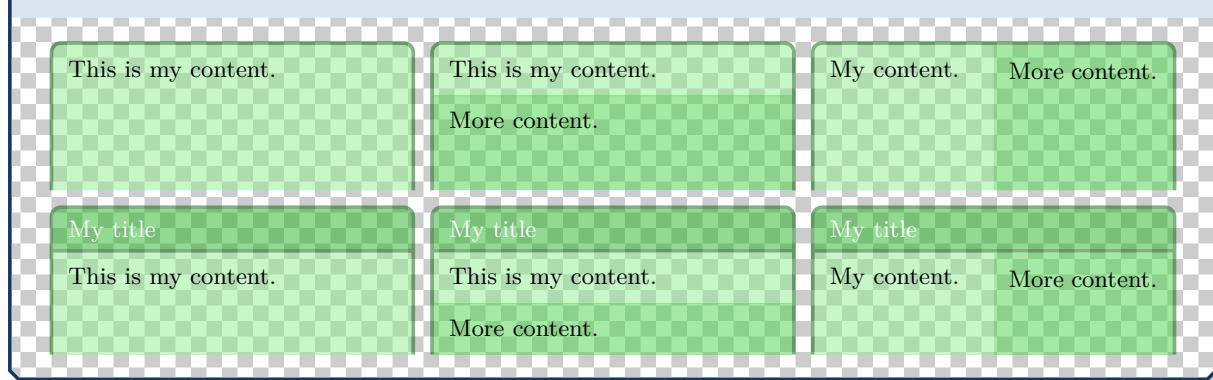

This is the jigsaw variant of skin `bicolormiddle`<sup>→ P. 252</sup>. It differs by its frame engine, see 10.11 on page 227.

### Environment and engines for the skin “bicolormiddle jigsaw”

/tcb/frame engine <sup>→ P. 158:</sup>	pathmiddlejigsaw
/tcb/interior titled engine <sup>→ P. 158:</sup>	<i>special</i>
/tcb/interior engine <sup>→ P. 159:</sup>	<i>special</i>
/tcb/segmentation engine <sup>→ P. 159:</sup>	<i>special</i>
/tcb/title engine <sup>→ P. 159:</sup>	pathmiddle

```
\skinExampleSet{skin=bicolormiddle jigsaw,
  colbacklower=LimeGreen!75!LightGreen,
  opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
  opacitybacklower=0.5,
}
```



This is the jigsaw variant of skin `bicolorlast`<sup>→ P. 253</sup>. It differs by its frame engine, see 10.11 on page 227.

### Environment and engines for the skin “bicolorlast jigsaw”

/tcb/frame engine <sup>→ P. 158:</sup>	pathlastjigsaw
/tcb/interior titled engine <sup>→ P. 158:</sup>	special
/tcb/interior engine <sup>→ P. 159:</sup>	special
/tcb/segmentation engine <sup>→ P. 159:</sup>	special
/tcb/title engine <sup>→ P. 159:</sup>	pathlast

```
\skinExampleSet{skin=bicolorlast jigsaw,
  colbacklower=LimeGreen!75!LightGreen,
  opacityframe=0.5,opacityback=0.5,opacitybacktitle=0.5,
  opacitybacklower=0.5,
}
```



## 11.4 Skin Family “tile”

N 2016-02-25

/tcb/skin=tile

(skin)

This skin is a variant of skin `bicolor`<sup>→ P. 247</sup>. Especially, the optional lower part of the box is colored by `/tcb/colbacklower`<sup>→ P. 249</sup>. The main difference to `bicolor`<sup>→ P. 247</sup> is that `tile` has no frame.

### Environment and engines for the skin “tile”

```
/tcb/frame engine→ P. 158: empty  
/tcb/interior titled engine→ P. 158: special  
/tcb/interior engine→ P. 159: special  
/tcb/segmentation engine→ P. 159: special  
/tcb/title engine→ P. 159: path
```

N 2016-02-25

/tcb/tile

(style, initially

`skin=tile,boxrule=0pt,sharp corners,title filled,fonttitle=\bfseries`)

This key applies `skin=tile` and in addition changes the geometry and some style options.

```
\skinExampleSet{tile,  
  colbacklower=LimeGreen!75!LightGreen,  
}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

This is a flavor of `tile`<sup>→ P. 258</sup> which is used as a *first* part in a break sequence for `tile`<sup>→ P. 258</sup>. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “tilefirst”

/tcb/frame engine <sup>→ P. 158</sup> :	empty
/tcb/interior titled engine <sup>→ P. 158</sup> :	special
/tcb/interior engine <sup>→ P. 159</sup> :	special
/tcb/segmentation engine <sup>→ P. 159</sup> :	special
/tcb/title engine <sup>→ P. 159</sup> :	pathfirst

```
\skinExampleSet{skin=tilefirst,
  colbacklower=LimeGreen!75!LightGreen,
  boxrule=0pt,
}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content. More content.

More content.

More content.


More content.

This is a flavor of `tile`<sup>→ P. 258</sup> which is used as a *middle* part in a break sequence for `tile`<sup>→ P. 258</sup>. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “tilemiddle”

<code>/tcb/frame engine</code> <sup>→ P. 158</sup> :	<code>empty</code>
<code>/tcb/interior titled engine</code> <sup>→ P. 158</sup> :	<code>special</code>
<code>/tcb/interior engine</code> <sup>→ P. 159</sup> :	<code>special</code>
<code>/tcb/segmentation engine</code> <sup>→ P. 159</sup> :	<code>special</code>
<code>/tcb/title engine</code> <sup>→ P. 159</sup> :	<code>pathmiddle</code>

```
\skinExampleSet{skin=tilemiddle,
  colbacklower=LimeGreen!75!LightGreen,
  boxrule=0pt,
}
```

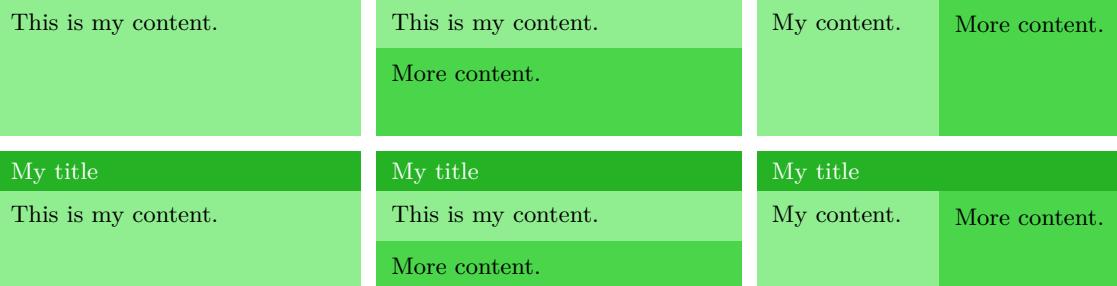


This is a flavor of `tile`<sup>P. 258</sup> which is used as a *last* part in a break sequence for `tile`<sup>P. 258</sup>. Nevertheless, this skin can be applied independently.

Environment and engines for the skin “tilelast”

/tcb/frame engine	$\rightarrow$ P. 158:	empty
/tcb/interior titled engine	$\rightarrow$ P. 158:	special
/tcb/interior engine	$\rightarrow$ P. 159:	special
/tcb/segmentation engine	$\rightarrow$ P. 159:	special
/tcb/title engine	$\rightarrow$ P. 159:	pathlast

```
\skinExampleSet{skin=tilelast,  
    colbacklower=LimeGreen!75!LightGreen,  
    boxrule=0pt,  
}
```

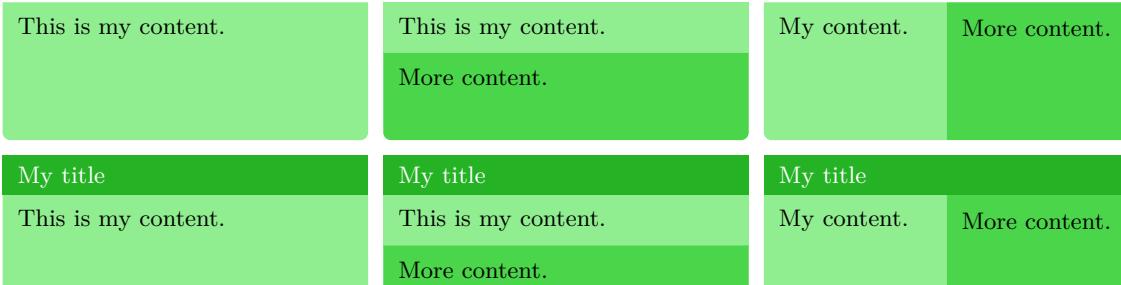

## 11.5 Skin Family “beamer”

/tcb/skin=beamer

(skin)

This skin resembles boxes known from the `beamer` class and therefore is called “beamer”. It uses the normal colors from the core package but shades them a little bit.

### Environment and engines for the skin “beamer”

```
/tcb/frame engine→ P. 158: path  
/tcb/interior titled engine→ P. 158: special  
/tcb/interior engine→ P. 159: special  
/tcb/segmentation engine→ P. 159: special  
/tcb/title engine→ P. 159: path
```

/tcb/beamer

(style, initially

`skin=beamer,boxrule=0mm,titlerule=1mm,toptitle=0.5mm,  
arc=2mm,fonttitle=\bfseries,drop fuzzy shadow`)

This key applies `skin=beamer` and in addition changes the geometry and some style options.

```
\skinExampleSet{beamer,title filled=false}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

```
\begin{tcolorbox}[beamer,colback=Salmon!50!white,colframe=FireBrick!75!black,  
adjusted title=A colored box with the \enquote{beamer} skin]  
This box looks like a box provided by the \texttt{beamer} class.  
\end{tcolorbox}
```

### A colored box with the “beamer” skin

This box looks like a box provided by the `beamer` class.

```
\begin{tcolorbox}[beamer,colframe=blue,colback=black,
watermark graphics=lichtspiel.jpg,
coltext=white,watermark opacity=0.75,watermark stretch=1.0,
title=Beamer Box with background picture]
\lipsum[1]
\end{tcolorbox}
```

### Beamer Box with background picture

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

```
\newtcolorbox{myblock}[2][]{%
beamer,breakable,colback=LightBlue,colframe=DarkBlue,#1,title={#2}}%

\begin{myblock}{Beamerish \texttt{block}: \texttt{myblock}}
\lipsum[1]
\end{myblock}
```

### Beamerish block: myblock

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

/tcb/skin=beamerfirst

(skin)

This is a flavor of beamer<sup>→ P. 262</sup> which is used as a *first* part in a break sequence for beamer<sup>→ P. 262</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin “beamerfirst”

```
/tcb/frame engine→ P. 158: pathfirst  
/tcb/interior titled engine→ P. 158: special  
/tcb/interior engine→ P. 159: special  
/tcb/segmentation engine→ P. 159: special  
/tcb/title engine→ P. 159: pathfirst
```

```
\skinExampleSet{beamer,title filled=false,skin=beamerfirst}
```



/tcb/skin=beamermiddle

(skin)

This is a flavor of beamer<sup>→ P. 262</sup> which is used as a *middle* part in a break sequence for beamer<sup>→ P. 262</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin “beamermiddle”

```
/tcb/frame engine→ P. 158: pathmiddle  
/tcb/interior titled engine→ P. 158: special  
/tcb/interior engine→ P. 159: special  
/tcb/segmentation engine→ P. 159: special  
/tcb/title engine→ P. 159: pathmiddle
```

```
\skinExampleSet{beamer,title filled=false,skin=beamermiddle}
```



This is a flavor of `beamer`<sup>→ P. 262</sup> which is used as a *last* part in a break sequence for `beamer`<sup>→ P. 262</sup>. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “beamerlast”

```
/tcb/frame engine→ P. 158: pathlast
/tcb/interior titled engine→ P. 158: special
/tcb/interior engine→ P. 159: special
/tcb/segmentation engine→ P. 159: special
/tcb/title engine→ P. 159: pathlast
```

```
\skinExampleSet{beamer,title filled=false,skin=beamerlast}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

## 11.6 Skin Family “widget”

/tcb/skin=widget

(skin)

This skin uses the normal colors from the core package but shades them a little bit. The appearance of the skin can be controlled by /tcb/frame style<sup>→ P. 172</sup>, /tcb/interior style<sup>→ P. 173</sup>, and /tcb/segmentation style<sup>→ P. 175</sup>, if needed.

### Environment and engines for the skin “widget”

```
/tcb/frame engine→ P. 158: path  
/tcb/interior titled engine→ P. 158: path  
/tcb/interior engine→ P. 159: path  
/tcb/segmentation engine→ P. 159: special  
/tcb/title engine→ P. 159: special
```

U 2020-09-23

/tcb/widget

(style, initially

skin=widget,arc=0.5mm,fonttitle=,titlerule=0mm)

This key applies skin=widget and in addition changes the geometry and some style options.

\skinExampleSet{widget}

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

```
\begin{tcolorbox}[widget,colback=Salmon!50!white,colframe=FireBrick!75!black,  
adjusted title=A colored box with the \enquote{widget} skin]  
This is my content.  
\end{tcolorbox}
```

A colored box with the “widget” skin

This is my content.

/tcb/skin=widgetfirst

(skin)

This is a flavor of `widget`<sup>→ P. 266</sup> which is used as a *first* part in a break sequence for `widget`<sup>→ P. 266</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin “widgetfirst”

```
/tcb/frame engine→ P. 158: pathfirst  
/tcb/interior titled engine→ P. 158: pathfirst  
/tcb/interior engine→ P. 159: pathfirst  
/tcb/segmentation engine→ P. 159: special  
/tcb/title engine→ P. 159: special
```

\skinExampleSet{widget,skin=widgetfirst}

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

/tcb/skin=widgetmiddle

(skin)

This is a flavor of `widget`<sup>→ P. 266</sup> which is used as a *middle* part in a break sequence for `widget`<sup>→ P. 266</sup>. Nevertheless, this skin can be applied independently.

#### Environment and engines for the skin “widgetmiddle”

```
/tcb/frame engine→ P. 158: pathmiddle  
/tcb/interior titled engine→ P. 158: pathmiddle  
/tcb/interior engine→ P. 159: pathmiddle  
/tcb/segmentation engine→ P. 159: special  
/tcb/title engine→ P. 159: special
```

\skinExampleSet{widget,skin=widgetmiddle}

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

This is a flavor of `widget`<sup>→ P. 266</sup> which is used as a *last* part in a break sequence for `widget`<sup>→ P. 266</sup>. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “widgetlast”

/tcb/frame engine <sup>→ P. 158:</sup>	pathlast
/tcb/interior titled engine <sup>→ P. 158:</sup>	pathlast
/tcb/interior engine <sup>→ P. 159:</sup>	pathlast
/tcb/segmentation engine <sup>→ P. 159:</sup>	special
/tcb/title engine <sup>→ P. 159:</sup>	special

```
\skinExampleSet{widget,skin=widgetlast}
```

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

## 11.7 Skin Family “empty”

/tcb/skin=empty

(skin)

This skin sets all engines to `empty`, i.e. nothing is drawn at all. Therefore, this skin is a good starting point to create a complete new style by yourself.

### Environment and engines for the skin “empty”

```
/tcb/frame engine→ P. 158: empty  
/tcb/interior titled engine→ P. 158: empty  
/tcb/interior engine→ P. 159: empty  
/tcb/segmentation engine→ P. 159: empty  
/tcb/title engine→ P. 159: empty
```



Note that the text colors stay unchanged when a skin is applied. Since the standard title color is white, the title of a box with skin `empty` becomes invisible, if not set to another color by `/tcb/colttitle→ P. 35:`.

/tcb/empty

(style, no value)

This is an abbreviation for setting `skin=empty`.

```
\skinExampleSet{empty,  
  coltitle=Navy, borderline={2pt}{0pt}{black!10!white},  
}
```

This is my content.

This is my content.

My content. More content.

My title

This is my content.

My title

This is my content.

My title

My content. More content.

This style relies on the skin `empty`<sup>→ P. 269</sup>. All engines are set to empty and all margins are set to Opt. In contrast to `/tcb/blank`<sup>→ P. 237</sup>, the graphical paths are not constructed with exception of the geometry nodes.

```
\begin{tcolorbox}[blanker,watermark text=A blank box]
\lipsum[1]
\end{tcolorbox}
```

Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

```
% \tcbuselibrary{fitting}
\newtcboxfit{\mybox}[1]{blanker,width=4cm,height=7cm,top=4pt,
watermark text=#1}

\begin{tabular}{|c|c|c|}\hline
A & B & C\\\hline
\mybox{A}{\lipsum[1]} & \mybox{B}{\lipsum[2]} & \mybox{C}{\lipsum[3]}\\\hline
\end{tabular}
```

A	B	C
<p>Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.</p>	<p>Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspensisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.</p>	<p>Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.</p>

This style extends /tcb/blanker<sup>→ P. 270</sup>. All engines are set to empty and all margins are set to Opt. In contrast to /tcb/blanker<sup>→ P. 270</sup>, also title, shadow, underlay, overlay, finish and borderline are removed.

```
% \tcbuselibrary{raster}
\begin{tcbbraster}[raster columns=3,raster equal height,
  title=Box \thetcbasternum,
  enhanced,size=small,colframe=red!50!black,colback=red!10!white,
  coltitle=yellow!85!black,
  drop fuzzy shadow,watermark text={Box \thetcbasternum},
  borderline={.25mm}{-.5mm}{green!40!black},
  finish=\begin{tcbclipframe}\draw[blue,opacity=0.1,line width=1cm]
  (frame.south west) -- (frame.north east);\end{tcbclipframe}],
]
\begin{tcolorbox}\lipsum[4]\end{tcolorbox}
\begin{tcolorbox}[blanker]\lipsum[4]\end{tcolorbox}
\begin{tcolorbox}[blankest]\lipsum[4]\end{tcolorbox}
\end{tcbbraster}
```

Box 1

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Box 2

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

This is a flavor of `empty→ P. 269` which is used as a *first* part in a break sequence for `empty→ P. 269`. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “emptyfirst”

```
/tcb/frame engine→ P. 158: empty
/tcb/interior titled engine→ P. 158: empty
/tcb/interior engine→ P. 159: empty
/tcb/segmentation engine→ P. 159: empty
/tcb/title engine→ P. 159: empty
```

```
\skinExampleSet{skin=emptyfirst,
  coltitle=Navy,borderline={2pt}{0pt}{black!10!white},
}
```

This is my content.

This is my content.

My content. More content.

My title

This is my content.

My title

This is my content.

My title

My content. More content.

This is a flavor of `empty→ P. 269` which is used as a *middle* part in a break sequence for `empty→ P. 269`. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “emptymiddle”

```
/tcb/frame engine→ P. 158: empty
/tcb/interior titled engine→ P. 158: empty
/tcb/interior engine→ P. 159: empty
/tcb/segmentation engine→ P. 159: empty
/tcb/title engine→ P. 159: empty
```

```
\skinExampleSet{skin=emptymiddle,
  coltitle=Navy,borderline={2pt}{0pt}{black!10!white},
}
```

This is my content.

This is my content.

My content. More content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content. More content.

More content.

This is a flavor of `empty`<sup>→ P. 269</sup> which is used as a *last* part in a break sequence for `empty`<sup>→ P. 269</sup>. Nevertheless, this skin can be applied independently.

### Environment and engines for the skin “emptylast”

```
/tcb/frame engine→ P. 158: empty
/tcb/interior titled engine→ P. 158: empty
/tcb/interior engine→ P. 159: empty
/tcb/segmentation engine→ P. 159: empty
/tcb/title engine→ P. 159: empty
```

```
\skinExampleSet{skin=emptylast,
  coltitle=Navy,borderline={2pt}{0pt}{black!10!white},
}
```

This is my content.

This is my content.

My content. More content.

My title

This is my content.

My title

This is my content.

My title

My content. More content.

This example demonstrates a breakable customized box. Here, we define an environment `freebox`. The first application of `freebox` produces an unbroken `tcolorbox`. The box is drawn by the code given by `/tcb/frame code`<sup>→ P. 161</sup> and `/tcb/interior code`<sup>→ P. 162</sup>. The second application of `freebox` is broken into several parts which are drawn by the codes given by `/tcb/skin first is subskin of`<sup>→ P. 164</sup>, `/tcb/skin middle is subskin of`<sup>→ P. 164</sup>, and `/tcb/skin last is subskin of`<sup>→ P. 164</sup>.

```
% Preamble:
%\usepackage{lipsum}
%\tcbuselibrary{skins,breakable}
\tikzset{coltria/.style={fill=red!15!white}}


\newtcolorbox{freebox}[1][]{\empty,
  breakable,height fixed for=first and middle,
  leftrule=5mm,left=2mm,
  frame style={fill,top color=red!75!black,bottom color=red!75!black,middle color=red},
  colback=yellow!50!white,
  watermark color=red!50!yellow!75!white,
  watermark text on=unbroken is unbroken box,
  watermark text on=first is first part,
  watermark text on=middle is middle part,
  watermark text on=last is last part,
  % code for unbroken boxes:
  frame code={\path[tcb fill frame] (frame.south west)--(frame.north west)
    --([xshift=-5mm]frame.north east)--([yshift=-5mm]frame.north east)
    --([yshift=5mm]frame.south east)--([xshift=-5mm]frame.south east)--cycle; },
  interior code={\path[tcb fill interior] (interior.south west)--(interior.north west)
    --([xshift=-4.8mm]interior.north east)--([yshift=-4.8mm]interior.north east)
    --([yshift=4.8mm]interior.south east)--([xshift=-4.8mm]interior.south east)
    --cycle; },
  % code for the first part of a break sequence:
  skin first is subskin of={emptyfirst}{%
    frame code={\path[tcb fill frame] (frame.south west)--(frame.north west)
      --([xshift=-5mm]frame.north east)--([yshift=-5mm]frame.north east)
      --(frame.south east)--cycle;
    \path[coltria] ([xshift=2.5mm,yshift=1mm]frame.south west) -- +(120:2mm)
      -- +(60:2mm)-- cycle; },
    interior code={\path[tcb fill interior] (interior.south west|-frame.south)
      --(interior.north west)--([xshift=-4.8mm]interior.north east)
      --([yshift=-4.8mm]interior.north east)--(interior.south east|-frame.south)
      --cycle; },
  },%
  % code for the middle part of a break sequence:
  skin middle is subskin of={emptymiddle}{%
    frame code={\path[tcb fill frame] (frame.south west)--(frame.north west)
      --(frame.north east)--(frame.south east)--cycle;
    \path[coltria] ([xshift=2.5mm,yshift=-1mm]frame.north west) -- +(240:2mm)
      -- +(300:2mm) -- cycle;
    \path[coltria] ([xshift=2.5mm,yshift=1mm]frame.south west) -- +(120:2mm)
      -- +(60:2mm) -- cycle;
  },
  interior code={\path[tcb fill interior] (interior.south west|-frame.south)
    --(interior.north west|-frame.north)--(interior.north east|-frame.north)
    --(interior.south east|-frame.south)--cycle; },
},%
  % code for the last part of a break sequence:
  skin last is subskin of={emptylast}{%
    frame code={\path[tcb fill frame] (frame.south west)--(frame.north west)
      --(frame.north east)--([yshift=5mm]frame.south east)
      --([xshift=-5mm]frame.south east)--cycle;
    \path[coltria] ([xshift=2.5mm,yshift=-1mm]frame.north west) -- +(240:2mm)
      -- +(300:2mm) -- cycle;
  }
}
```

```

    },
    interior code={\path[tcb fill interior] (interior.south west)
      --(interior.north west|-frame.north)--(interior.north east|-frame.north)
      --([yshift=4.8mm]interior.south east)--([xshift=-4.8mm]interior.south east)
      --cycle; },
},
#1}

\begin{freebox}
\lipsum[1]
\end{freebox}

\begin{freebox}
\lipsum[1-12]
\end{freebox}

```

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel

magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

**middle part**  
Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetur at, consectetur sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

Morbi luctus, wisi viverra faucibus pretium, nibh est placerat odio, nec commodo wisi enim eget quam. Quisque libero justo, consectetur a, feugiat vitae, porttitor eu, libero. Suspendisse sed mauris vitae elit sollicitudin malesuada. Maecenas ultricies eros sit amet ante. Ut venenatis velit. Maecenas sed mi eget dui varius euismod. Phasellus aliquet volutpat odio. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Pellentesque sit amet pede ac sem eleifend consectetur. Nullam elementum, urna vel imperdiet sodales, elit ipsum pharetra ligula, ac pretium ante justo a nulla. Curabitur tristique arcu eu metus. Vestibulum lectus. Proin mauris. Proin eu nunc eu urna hendrerit faucibus. Aliquam auctor, pede consequat laoreet varius, eros tellus scelerisque quam, pellentesque hendrerit ipsum dolor sed augue. Nulla nec lacus.

Suspendisse vitae elit. Aliquam arcu neque, ornare in, ullamcorper quis, commodo eu, libero. Fusce sagittis erat at erat tristique mollis. Maecenas sapien libero, molestie et, lobortis in, sodales eget, dui. Morbi ultrices rutrum lorem. Nam elementum ullamcorper leo. Morbi dui. Aliquam sagittis. Nunc placerat. Pellentesque tristique sodales est. Maecenas imperdierat lacinia velit. Cras non urna. Morbi eros pede, suscipit ac, varius vel, egestas non, eros. Praesent malesuada, diam id pretium elementum, eros sem dictum tortor, vel consectetur odio sem sed wisi.

Sed feugiat. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Ut pellentesque augue sed urna. Vestibulum diam eros, fringilla et, consectetur eu, nonummy id, sapien. Nullam at lectus. In sagittis ultrices mauris. Curabitur malesuada erat sit amet massa. Fusce blandit. Aliquam erat volutpat. Aliquam euismod. Aenean vel lectus. Nunc imperdierat justo nec dolor.

Etiam euismod. Fusce facilisis lacinia dui. Suspendisse potenti. In mi erat, cursus id, nonummy sed, ullamcorper eget, sapien. Praesent pretium, magna in eleifend egestas, pede pede pretium lorem, quis consectetur tortor sapien facilisis magna. Mauris quis magna varius nulla scelerisque imperdierat. Aliquam non quam. Aliquam porttitor quam a lacus. Praesent vel arcu ut tortor cursus volutpat. In vitae pede quis diam bibendum placerat. Fusce elementum convallis neque. Sed dolor orci, scelerisque ac, dapibus nec, ultricies ut, mi. Duis nec dui quis leo sagittis commodo.

## Last Part

## 11.8 Skin “spartan”

/tcb/skin=spartan

(skin)

This skin is quite ... spartan. It supports no rounded corners, no overlays, no shadows, no borderlines, and no finishes. The only exception are underlays. One cannot do very fancy things with this skin, but it compiles very fast. Therefore, the **spartan** skin is used for the draft mode, see 10.12 on page 229. Nevertheless, it can be used as a normal skin.

### Environment and engines for the skin “spartan”

```
/tcb/frame engine→ P. 158: spartan  
/tcb/interior titled engine→ P. 158: spartan  
/tcb/interior engine→ P. 159: spartan  
/tcb/segmentation engine→ P. 159: spartan  
/tcb/title engine→ P. 159: spartan
```

/tcb/spartan

(style, no value)

This is an abbreviation for setting `skin=spartan`.

\skinExampleSet{spartan}

This is my content.

This is my content.

My content.

More content.

My title

This is my content.

My title

This is my content.

My title

My content.

More content.

## 11.9 Skin “draft”

/tcb/skin=draft

(skin)

This skin is intended to be used while drafting new geometric settings for a `tcolorbox`.

### Environment and engines for the skin “draft”


```
/tcb/frame engine→ P. 158: special  
/tcb/interior titled engine→ P. 158: special  
/tcb/interior engine→ P. 159: special  
/tcb/segmentation engine→ P. 159: path  
/tcb/title engine→ P. 159: path
```

/tcb/draft

(style, no value)

This is an abbreviation for setting `skin=draft`.

```
\skinExampleSet{draft}
```

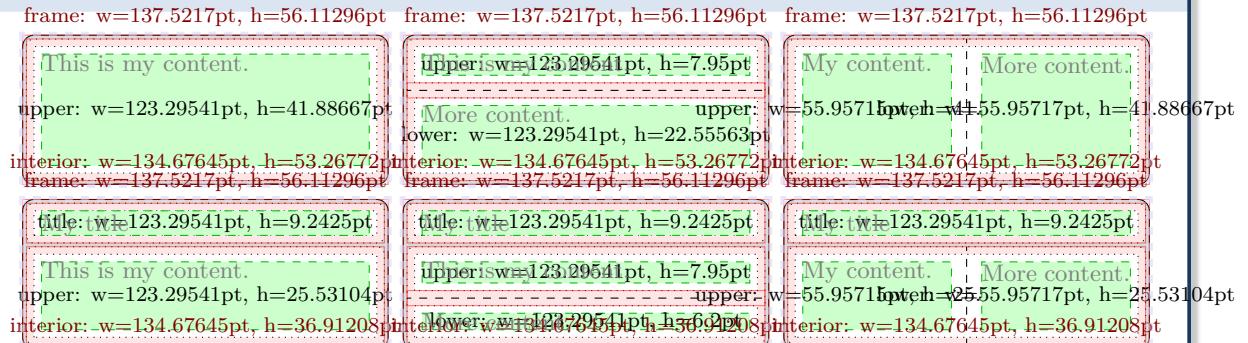

```
\vspace*{3mm}
\begin{tcolorbox}[draft,title=A colored box with the \enquote{draft} skin]
\lipsum[1-3]
\tcblower
\lipsum[4-6]
\end{tcolorbox}
```

frame: w=423.94617pt, h=506.20157pt

A colored box with the “draft” skin title: w=392.64822pt, h=6.2pt

Lo&lt;em&gt; ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet. upper: w=392.64822pt, h=249.95ptetus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. lower: w=392.64822pt, h=205.95ptquisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula. Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in lower: w=392.64822pt, h=205.95ptsagittis du, et vehicula libero dui cursus du. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas du, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. lower: w=392.64822pt, h=205.95ptInteger arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

## 11.10 Skin Family “freelance”



This skin family “freelance” is deprecated with `tcolorbox` 3.00. It is not longer needed, because `/tcb/frame code`<sup>→ P. 161</sup>, `/tcb/interior code`<sup>→ P. 162</sup>, `/tcb/interior titled code`<sup>→ P. 161</sup>, and `/tcb/title code`<sup>→ P. 163</sup> can be applied to every skin now. In this sense, everything has become *freelance* now.

! For users of `/tcb/freelance`: Old code should continue to work. There may be exceptions for breakable freelance boxes under certain circumstances. For new code, use `/tcb/empty`<sup>→ P. 269</sup> or `/tcb/enhanced`<sup>→ P. 235</sup> where you would have used `/tcb/freelance` before.

### `/tcb/skin=freelance`

(skin)

This skin gives full freedom for the appearance of the `tcolorbox`. All drawing engines are set to type `freelance`; they use the `tikz` package and compute the `/tcb/geometry nodes`<sup>→ P. 160</sup>.

#### Environment and engines for the skin “freelance”

<code>/tcb/frame engine</code> <sup>→ P. 158</sup> :	<code>freelance</code>
<code>/tcb/interior titled engine</code> <sup>→ P. 158</sup> :	<code>freelance</code>
<code>/tcb/interior engine</code> <sup>→ P. 159</sup> :	<code>freelance</code>
<code>/tcb/segmentation engine</code> <sup>→ P. 159</sup> :	<code>freelance</code>
<code>/tcb/title engine</code> <sup>→ P. 159</sup> :	<code>freelance</code>

### `/tcb/freelance`

(style, no value)

This is an abbreviation for setting `skin=freelance`.

### `/tcb/skin=freelancefirst`

(skin)

This skin equals `freelance` with exception of the break sequence, see 19.8 on page 422.

### `/tcb/skin=freelancemiddle`

(skin)

This skin equals `freelance` with exception of the break sequence, see 19.8 on page 422.

### `/tcb/skin=freelancelast`

(skin)

This skin equals `freelance` with exception of the break sequence, see 19.8 on page 422.

### `/tcb/extend freelance=⟨options⟩`

(no default, initially empty)

The `⟨options⟩` are added to the skin definition of `freelance`.

### `/tcb/extend freelancefirst=⟨options⟩`

(no default, initially empty)

The `⟨options⟩` are added to the skin definition of `freelancefirst` which is used as first part of the break sequence of `freelance`. See `/tcb/skin first is subskin of`<sup>→ P. 164</sup> for a substitute of this key.

### `/tcb/extend freelancemiddle=⟨options⟩`

(no default, initially empty)

The `⟨options⟩` are added to the skin definition of `freelancemiddle` which is used as middle part of the break sequence of `freelance`. See `/tcb/skin middle is subskin of`<sup>→ P. 164</sup> for a substitute of this key.

### `/tcb/extend freelancelast=⟨options⟩`

(no default, initially empty)

The `⟨options⟩` are added to the skin definition of `freelancelast` which is used as last part of the break sequence of `freelance`. See `/tcb/skin last is subskin of`<sup>→ P. 164</sup> for a substitute of this key.

## 12 Inclusion of Boxed Image Files

The `\tcbuse{skins}` library adds some commands to conveniently include boxed image files. For the following macros and options, the `\tcbuse{skins}` library has to be loaded by a package option or inside the preamble by:

```
\tcbuse{skins}
```

See 10 on page 172 for the documentation of all other options of the `\tcbuse{skins}` library.

### 12.1 Macros

N 2014-11-14  
U 2016-07-13 `\tcbincludegraphics[<options>]{<file name>}`

In principle, this macro includes an image file denoted by `<file name>` using the standard `\includegraphics` and puts it into a `tcolorbox`<sup>P.12</sup>. The `<options>` are `tcolorbox` keys to set up the colored box. Use `/tcb/graphics options`<sup>P.286</sup> to specify options for the underlying `\includegraphics`. Some `tcolorbox` option keys are automatically set, namely `/tcb/enhanced`<sup>P.235</sup> and options to center the image inside the box.

The sizing of the included image is done depending on the following:

- If a `/tcb/width`<sup>P.41</sup> is specified, but no fixed `/tcb/height`<sup>P.60</sup>, the image is sized to fill the inner width of the box. The height of the box adapts to the image.
- If a fixed `/tcb/height`<sup>P.60</sup> is specified, the image is sized to fill the fixed inner area of the box.
- If the `/tcb/capture`<sup>P.109</sup> mode `/tcb/hbox`<sup>P.109</sup> is specified, the image is sized according to given `\includegraphics` options only. The box adapts to the image.

```
% \tcbuse{raster}
\begin{tcbraster}[raster columns=3,raster force size=false,size=fbox,
    colframe=red!50!black,colback=red!20!black,
    fonttitle=\bfseries,center title,drop fuzzy shadow]
\tcbincludegraphics[title=Normal]{goldshade.png}
\tcbincludegraphics[title=Fixed height,height=3cm]{goldshade.png}
\tcbincludegraphics[title=hbox mode,hbox,graphics options={width=3cm}]{goldshade.png}
\end{tcbraster}
```



The auxiliary macro `\imagename` may be used inside `\tcbincludegraphics`<sup>P. 283</sup> to display the name of the file. `\imagename` is already partially detokenized and is allowed to contain special characters like the underscore. Note that an appropriate font is required to display such characters.

```
% \tcbuselibrary{raster}
\begin{tcbraster}[size=fbox,
    colframe=red!50!black,colback=red!20!black,
    fonttitle=\bfseries\ttfamily,center title,drop fuzzy shadow]
\tcbincludegraphics[title=\imagename]{goldshade.png}
\tcbincludegraphics[finish={
    \node[fill=white,fill opacity=0.5,text opacity=1]
    at (frame.center) {\bfseries\ttfamily\imagename};}]{blueshade.png}
\end{tcbraster}
```



`\tcbincludepdf[options]{file name}`

This is a generalized version of `\tcbincludegraphics`<sup>→ P. 283</sup> which allows to include a complete PDF file denoted by `\langle file name \rangle`. Every page is boxed into an own `tcolorbox`<sup>→ P. 12</sup> customized by the given `\langle options \rangle`. It is reasonable to put such a series of boxes inside a `tcbbraster`<sup>→ P. 313</sup> for alignment.

Use `/tcb/graphics` pages<sup>→ P. 286</sup> to use a selection of pages instead of using the whole file. The auxiliary macro `\imagepage` may be used inside `\tcbincludepdf` to display the current page number.

```
% \tcbuselibrary{raster}
\begin{tcbraster}[raster columns=3,colframe=blue,colback=white,
  colbacktitle=blue!50!white,fonttitle=\small\bfseries\ttfamily,
  left=0pt,right=0pt,top=0pt,bottom=0pt,boxsep=0pt,boxrule=0.6pt,
  toptitle=1mm,bottomtitle=1mm,drop lifted shadow,center title,
  graphics pages={1,...,6},title={\imagerename\ [\imagepage]}}
\tcbincludepdf{tcolorbox-example.pdf}
\end{tcbraster}
```



## 12.2 Option Keys

N 2014-11-14  
U 2018-03-18

**/tcb/graphics options=⟨options⟩** (no default, initially empty)

Used for `\tcbincludegraphics→ P. 283` and `\tcbincludepdf→ P. 285` to specify `\includegraphics ⟨options⟩`. Note that `⟨options⟩` will be fully expanded.

```
% \tcbuselibrary{raster}
\begin{tcbraster}[raster columns=3,size=fbox,raster equal height,
colframe=red!50!black,colback=red!20!black,drop fuzzy shadow]
\tcbincludegraphics{goldshade.png}
\newcommand{\myangle}{angle=20}%
\tcbincludegraphics[graphics options=\myangle]{goldshade.png}
\tcbincludegraphics[graphics options={viewport=0cm 0cm 8cm 4cm,clip}]{goldshade.png}
\end{tcbraster}
```



N 2014-11-14

**/tcb/graphics directory=⟨directory⟩** (no default, initially empty)

Used for `\tcbincludegraphics→ P. 283` and `\tcbincludepdf→ P. 285` to specify a file system `⟨directory⟩` where the image files are located.

```
\tcbset{
  graphics directory={.},
  graphics directory={examples},
  graphics directory={../../pictures},
}
```

! The `\graphicspath` macro from the `graphics→ CTAN` package is superior to this option.  
 /tcb/graphics directory may be used especially for `\tcbincludepdf→ P. 285`.

N 2014-11-14

**/tcb/graphics pages=⟨selection⟩** (no default, initially `1, ..., \pdfpages`)

Used for `\tcbincludepdf→ P. 285` to specify a `⟨selection⟩` of pages to be included. The largest page number is accessible by `\pdfpages`. The `⟨selection⟩` has to be given using the `\foreach` syntax of TikZ.


```
\tcbset{
  graphics pages={1,3,7},
  graphics pages={1,...,10},
  graphics pages={1,3,...,18},
  graphics pages={100,...,\pdfpages},
}
```

Used for `\tcbincludegraphics`<sup>P. 283</sup> and `\tcbincludepdf`<sup>P. 285</sup> to guarantee a certain `<orientation>` of the included image. After all other options for the image are processed, the result is possibly rotated to be in landscape or portrait mode.

Feasible values for `<orientation>` are:

- **as-is**: no rotation of the processed image.
- **landscape**: the processed image is possibly rotated by 90 degrees to ensure that the final width is not smaller than the final height.
- **landscape\***: the processed image is possibly rotated by -90 degrees to ensure that the final width is not smaller than the final height.
- **portrait**: the processed image is possibly rotated by 90 degrees to ensure that the final height is not smaller than the final width.
- **portrait\***: the processed image is possibly rotated by -90 degrees to ensure that the final height is not smaller than the final width.

```
% \tcbsuselibrary{raster}
\begin{tcbbraster}[raster columns=6,size=fbox,raster equal height,
    colframe=red!50!black,colback=red!20!black,drop fuzzy shadow]
\tcbincludegraphics[Basilica_5.png]
\tcbincludegraphics[graphics orientation=landscape]{Basilica_5.png}
\tcbincludegraphics[graphics orientation=portrait]{Basilica_5.png}
\tcbincludegraphics[graphics orientation=portrait*]{Basilica_5.png}
\tcbincludegraphics[graphics options={viewport=0cm 0cm 2cm 3cm,clip}]
    {goldshade.png}
\tcbincludegraphics[graphics options={viewport=0cm 0cm 2cm 3cm,clip},
    graphics orientation=landscape]{goldshade.png}
\end{tcbbraster}
```

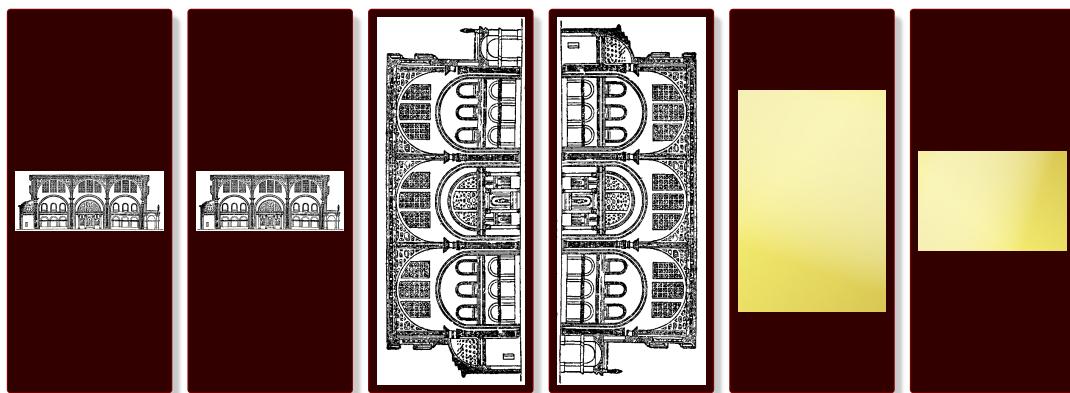

## 13 TikZ Auxiliary Macros

The `\lib{skins}` library adds some auxiliary options to the vast option set of TikZ [23]. These options can be used in any `tikzpicture`. For the following options, the `\lib{skins}` library has to be loaded by a package option or inside the preamble by:

```
\tcbuselibrary{skins}
```

See 10 on page 172 for the documentation of all other options of the `\lib{skins}` library.

! Up to version 5.1.1 (2022/06/24) of `tcolorbox`, TikZ image and picture fill extensions were documented here. These extensions are now separate TikZ libraries and part of the `tikzfill`<sup>→ CTAN</sup> package where they are documented now.

### 13.1 Straightening of the Arcs


! This patch is considered as an experimental feature. It changes some of the original TikZ code. This change may break with future updates of TikZ.

N 2014-05-05

#### `\tcbpatcharcangular`

The TikZ package provides a nice `rounded corners` option to replace all corners by little arcs. `\tcbpatcharcangular` is a patch which straightens the arcs. To say it more prosaic, the little arcs are replaced by little straight lines.

```
\begin{tikzpicture}
  \draw[thick,rounded corners=8pt]
    (0,0) -- (0,2) -- (1,3.25) -- (2,2) -- (2,0)
    -- (0,2) -- (2,2) -- (0,0) -- (2,0);
  \tcbpatcharcangular
  \draw[thick,rounded corners=8pt,xshift=2.5cm]
    (0,0) -- (0,2) -- (1,3.25) -- (2,2) -- (2,0)
    -- (0,2) -- (2,2) -- (0,0) -- (2,0);
\end{tikzpicture}
```



N 2014-05-05

#### `\tcbpatcharcround`

This macro reverts `\tcbpatcharcangular`, i.e., the patch from `\tcbpatcharcangular` is replaced by the original code.

## 13.2 Extracting Node Dimensions

The following auxiliary macros are defined by the **LIB skins** library. They allow to determine the width and height of an arbitrary TikZ node. To be more specific, they determine the east-to-west and the north-to-south dimensions which may be not the maximal dimensions for a non-rectangular node. Note that the following dimensions are measured exactly including the line width of the border line. If a new rectangle or node with the same dimensions and a border is to be drawn, this border width has to be subtracted.

**N** 2014-09-19 **\tcbsetwidthofnode**{*register*}{{*node*}}

Sets the east-to-west dimension of the given *node* to the TeX *register*.

**N** 2014-09-19 **\tcbsetmacrowidthofnode**{*macro*}{{*node*}}

Defines *macro* as the east-to-west dimension of the given *node*.

**N** 2014-09-19 **\tcbsettoheightofnode**{*register*}{{*node*}}

Sets the north-to-south dimension of the given *node* to the TeX *register*.

**N** 2014-09-19 **\tcbsetmacrotoheightofnode**{*macro*}{{*node*}}

Defines *macro* as the north-to-south dimension of the given *node*.

```
\begin{tikzpicture}
\node[align=center,draw=red,fill=yellow] (A) {This is my\example node};
\tcbsetmacrowidthofnode\mywidth{A}
\tcbsetmacrotoheightofnode\myheight{A}
\path[fill=blue!25!white]           % rectangle without border
 ([xshift=2mm]A.south east)
 rectangle node{Copy} +(\mywidth,\myheight);
\node[draw=blue,fill=blue!25!white, % standard border width 0.4pt
      minimum width=\mywidth-0.4pt,    % minus width of border
      minimum height=\myheight-0.4pt   % minus height of border
      ]
      at ([xshift=5cm]A) {Copy 2};
\end{tikzpicture}
```

This is my  
example node

Copy

Copy 2

## 13.3 Hyper Nodes

The following auxiliary macro is defined by the **LIB skins** library.

**N** 2016-02-03 **\tcbhypernode**{*macro*}{{*node*}}

**U** 2023-02-28 Applies a hyperlink creating *macro* from the package `hyperref`<sup>→ CTAN</sup> [16] to an existing tikz *node*. **\tcbhypernode** can only be used inside a `tikzpicture` environment. The last argument of the *macro* is to be omitted and should stand for an object (text) which is to be made a hyperlink. For example, use `\hyperref[name]` instead of `\hyperref[name]{text}`.

```
% \usepackage{hyperref}
\begin{tikzpicture}
\node[align=center,draw=red,fill=red!5] (mybutton)
  {Click me to jump to Section-\ref*{sec:tikzimagefilling}};
\tcbhypernode{\hyperref[sec:tikzimagefilling]}{mybutton}
\end{tikzpicture}
```

Click me to jump to Section 13

## 14 Beamer Support

The `\lib{skins}` library adds some supporting options for the `beamer` package [24]. For the following options, the `\lib{skins}` library has to be loaded by a package option or inside the preamble by:

```
\tcbuselibrary{skins}
```


See 10 on page 172 for the documentation of all other options of the `\lib{skins}` library.

**N** 2015-01-09    **U** 2019-03-01    **/tcb/only=<overlay specification>>{<options>}** (style, no default, initially unset)

Sets the given `tcolorbox` `<options>` in dependency of a `beamer` `<overlay specification>`. Note that this needs the `beamer` class [24]. The `<options>` will only be used on the specified `beamer` frames.

```
\documentclass{beamer}
\usepackage[many]{tcolorbox}
\begin{document}

\begin{frame}
\begin{tcolorbox}[title=My title,fonttitle=\bfseries,
enhanced,colframe=red!50!black,colback=red!10,colbacktitle=red,
sidebyside,righthand width=3cm,
lowerbox=invisible,lower separated=false,
drop lifted shadow,
only=<1>\colbacktitle=yellow,\coltitle=red!50!black,\colframe=red},
only=<3>\colback=yellow!50,watermark text={Attention!}},
only=<3->\lowerbox=visible} ]
This is a test.
\begin{itemize}[<+->]
\item One
\item Two
\item \alert<3>{Three}
\item Four
\end{itemize}
\tcblower
\begin{equation*}
\int\limits_{-1}^x \frac{1}{t} dt = \ln(x).
\end{equation*}
\end{tcolorbox}
\end{frame}
\end{document}
```

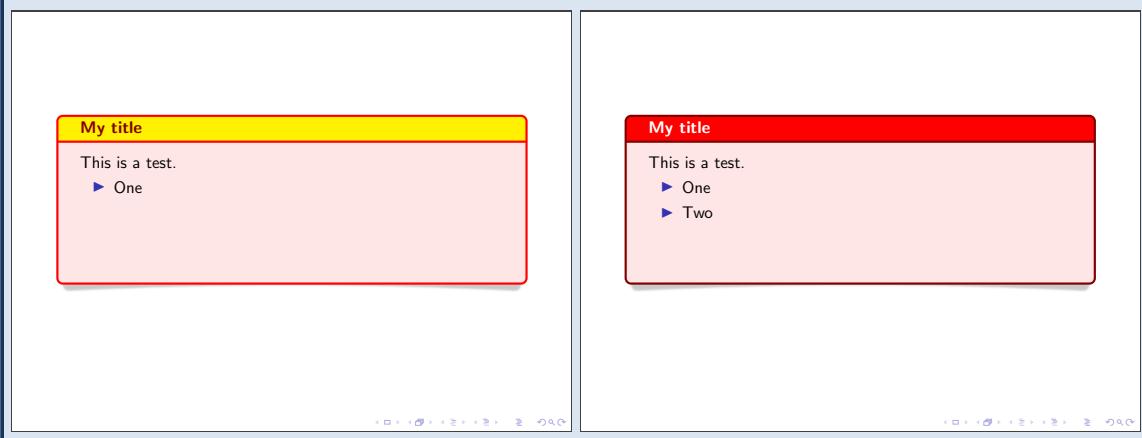

My title

This is a test.

- ▶ One
- ▶ Two
- ▶ Three

$$\int_1^x \frac{1}{t} dt = \ln(x).$$

```
\documentclass{beamer}
\usepackage[most]{tcolorbox}
\begin{document}

\begin{frame}[fragile]
\begin{tcblisting}[beamer,colback=blue!5,colframe=blue!20!gray,coltitle=yellow,
title=Example,
only=<1>\{lowerbox=invisible\},only=<2>\{}]
\end{tcblisting}
This is an \textbf{example listing}
\end{frame}
\end{document}
```

Example

This is an \textbf{example listing}

! The option `/tcb/only`<sup>P. 290</sup> belonged to the base package before version 4.20.

N 2025-05-28 `/tcb/alt=<overlay specification>{\<default>}{\<alternative>}` (style, no default, initially unset)

Alternates between different `tcolorbox` options in dependency of a `beamer` `<overlay specification>`. The `<default>` options are used on the specified slides, otherwise the `<alternative>` options. Note that this needs the `beamer` class [24].

N 2025-07-07 `/tcb/set alt={<default>}{\<alternative>}` (no default, initially {}{})

Stores the arguments later to be used with `/tcb/use alt`.

N 2025-07-07 `/tcb/use alt=<overlay specification>` (style, no default, initially unset)

Like `/tcb/alt`, but uses the arguments stored with `/tcb/set alt`.

N 2025-05-28 `/tcb/temporal=<overlay specification>{\<before slide>}{\<default>}{\<after slide>}` (style, no default, initially unset)

Temporarily changes between different `tcolorbox` options in dependency of a `beamer` `<overlay specification>`. The `<default>` options are used on the specified slides, the `<before slide>` options are used before them, and the `<after slide>` options after them. Note that this needs the `beamer` class [24].

N 2025-07-07 `/tcb/set temporal={<before slide>}{\<default>}{\<after slide>}` (no default, initially {}{}{})

Stores the arguments later to be used with `/tcb/use temporal`.

N 2025-07-07 `/tcb/use temporal=<overlay specification>` (style, no default, initially unset)

Like `/tcb/temporal`, but uses the arguments stored with `/tcb/set temporal`.

N 2019-03-01 `/tcb/hide=<overlay specification>` (style, no default, initially unset)

Sets the `/tcb/beamer hidden` style in dependency of a `beamer` `<overlay specification>`. `/tcb/beamer hidden` can be redefined for customization.

N 2019-03-01 `/tcb/beamer hidden` (style, no options, initially `nirvana`)

This style is not intended to be used directly, but in concealed way by applying `/tcb/hide`. The style can be redefined.

```
\tcbset{
  beamer hidden/.style={invisible,interior hidden,colframe=blue!20!gray!15},
}
```

N 2019-03-01 `/tcb/alert=<overlay specification>` (style, no default, initially unset)

Sets the `/tcb/beamer alerted` style in dependency of a `beamer` `<overlay specification>`. `/tcb/beamer alerted` can be redefined for customization.

N 2019-03-01 `/tcb/beamer alerted` (style, no options, initially `fuzzy halo`)


This style is not intended to be used directly, but in concealed way by applying `/tcb/alert`. The style can be redefined.

```
\tcbset{
  beamer alerted/.style={colframe=red!50!gray},
}
```

The following examples use `tcbitemize`<sup>→ P.314</sup> from  raster for convenient use of a list of boxes which are uncovered one by one.

```
\documentclass{beamer}
\usepackage[most]{tcolorbox}
\begin{document}

\begin{frame}
\begin{tcbitemize}[raster equal height=rows,
enhanced,colback=blue!5,colframe=blue!20!gray,coltitle=yellow,
]
\tcbitem[title=One,alert=<1>]
First Statement
\tcbitem[title=Two,hide=<-1>,alert=<2>]
Second Statement
\tcbitem[title=Three,hide=<-2>,alert=<3>]
Test
\tcbitem[title=Four,hide=<-3>,alert=<4>]
\begin{equation*}
\int_1^x \frac{dt}{t} = \ln(x).
\end{equation*}
\tcbitem[title=Five,hide=<-4>,alert=<5>]
\includegraphics[width=1cm]{goldshade.png}
\tcbitem[title=Six,hide=<-5>,alert=<6>]
Test
\end{tcbitemize}
\end{frame}
\end{document}
```

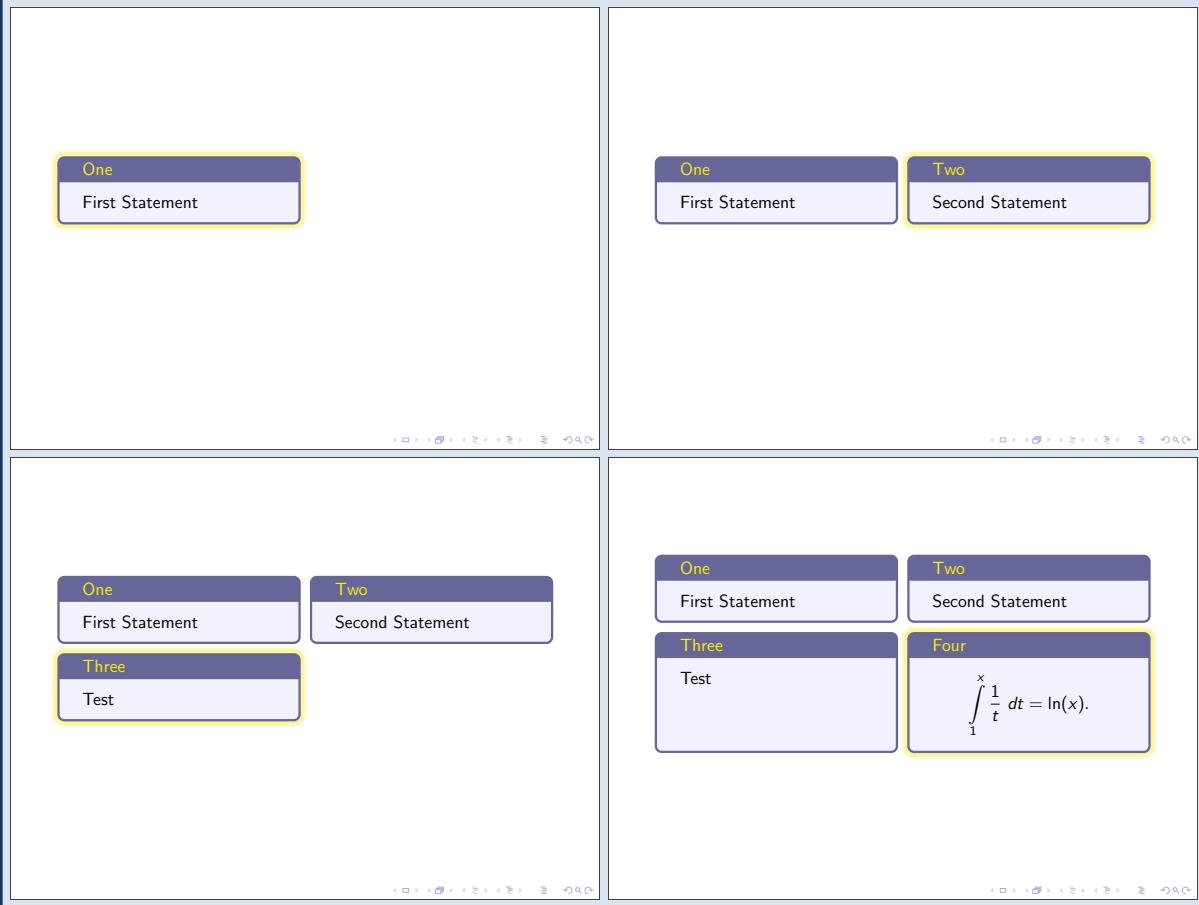

The figure consists of four Beamer slides arranged in a 2x2 grid, demonstrating the uncovering of items in a `tcbitemize` environment. Each slide has a set of navigation icons at the bottom right.

- Slide 1:** Contains a single box labeled "One" with the text "First Statement".
- Slide 2:** Contains two boxes: "One" with "First Statement" and "Two" with "Second Statement".
- Slide 3:** Contains three boxes: "One" with "First Statement", "Two" with "Second Statement", and "Three" with "Test".
- Slide 4:** Contains four boxes: "One" with "First Statement", "Two" with "Second Statement", "Three" with "Test", and "Four" containing the mathematical equation  $\int_1^x \frac{dt}{t} = \ln(x).$

One First Statement	Two Second Statement
Three Test	Four $\int_1^x \frac{1}{t} dt = \ln(x).$
Five 	Six Test

```
\documentclass{beamer}
\usepackage[most]{tcolorbox}
\begin{document}

\begin{frame}
\begin{tcbitemize}[raster equal height=rows,enhanced,
set temporal={invisible,interior hidden,colframe=blue!20!gray!15}
{colback=red!5,colframe=red!50!gray,coltitle=yellow}
{colback=blue!5,colframe=blue!20!gray,coltitle=yellow},
]
\tcbitem[title=One,use temporal=<1>]
First Statement
\tcbitem[title=Two,use temporal=<2>]
Second Statement
\tcbitem[title=Three,use temporal=<3>]
Test
\tcbitem[title=Four,use temporal=<4>]
\begin{equation*}
\int \frac{1}{t} dt = \ln(t).
\end{equation*}
\tcbitem[title=Five,use temporal=<5>]
\includegraphics[width=1cm]{goldshade.png}
\tcbitem[title=Six,use temporal=<6>]
Test
\end{tcbitemize}
\end{frame}
\end{document}
```

One First Statement	Two

One First Statement	Two Second Statement

One	Two
First Statement	Second Statement
Three	

One	Two
First Statement	Second Statement
Three	Four
Test	$\int_1^x \frac{1}{t} dt = \ln(x).$

One	Two
First Statement	Second Statement
Three	Four
Test	$\int_1^x \frac{1}{t} dt = \ln(x).$
Five	

One	Two
First Statement	Second Statement
Three	Four
Test	$\int_1^x \frac{1}{t} dt = \ln(x).$
Five	Six
	Test

```

\documentclass{beamer}
\usepackage[most]{tcolorbox}
\begin{document}

\begin{frame}
\begin{tcbitemize}[raster equal height=rows,beamer,
    colback=blue!5,colframe=blue!20!gray,coltitle=yellow,
    set temporal={colback=white,colframe=gray!50,
        opacityupper=0.2,opacitytitle=0.2}
        {colframe=red!50!gray,fuzzy halo}
        {},
    ]
\end{tcbitemize}
\begin{tcbitem}[title=One,use temporal=<1>]
First Statement
\end{tcbitem}
\begin{tcbitem}[title=Two,use temporal=<2>]
Second Statement
\end{tcbitem}
\begin{tcbitem}[title=Three,use temporal=<3>]
Test
\end{tcbitem}
\begin{tcbitem}[title=Four,use temporal=<4>]
\begin{equation*}
\int \limits_{\{1\}}^{\{x\}} \frac{1}{t} dt = \ln(x).
\end{equation*}
\end{tcbitem}
\begin{tcbitem}[title=Five,use temporal=<5>]
\includegraphics[width=1cm]{goldshade.png}
\end{tcbitem}
\begin{tcbitem}[title=Six,use temporal=<6>]
Test
\end{tcbitem}
\end{tcbitemize}
\end{frame}
\end{document}

```

<b>One</b>	<b>Two</b>
First Statement	Second Statement
Three	Four
Test	$\int_1^x \frac{1}{t} dt = \ln(x).$
Five	Six
	Test

<b>One</b>	<b>Two</b>
First Statement	Second Statement
Three	Four
Test	$\int_1^x \frac{1}{t} dt = \ln(x).$
Five	Six
	Test

<b>One</b>	<b>Two</b>
First Statement	Second Statement
<b>Three</b>	Four
Test	$\int_1^x \frac{1}{t} dt = \ln(x).$
Five	Six
	Test

<b>One</b>	<b>Two</b>
First Statement	Second Statement
<b>Three</b>	<b>Four</b>
Test	$\int_1^x \frac{1}{t} dt = \ln(x).$
Five	Six
	Test

```

\documentclass{beamer}
\usepackage[most]{tcolorbox}

\NewTCBox{\mybox}{ d<> }{enhanced,
temporal=<\!1>{empty,invisible}
{colback=red!5,colframe=red!20!gray}
{colframe=blue!20!gray,colback=blue!5},
}
\begin{document}

\begin{frame}
\begin{mybox}<1>
First Statement
\end{mybox}
\begin{mybox}<2>
Second Statement
\end{mybox}

```

```
\end{mybox}
\begin{mybox}{3}
    Third Statement
\end{mybox}
\begin{mybox}{4}
    Final Statement
\end{mybox}
\end{frame}
\end{document}
```

First Statement

First Statement

Second Statement

First Statement

Second Statement

Third Statement

First Statement

Second Statement

Third Statement

Final Statement

## 15 Library vignette

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{vignette}
```

This also loads the  skins library, see Section 10 on page 172, and the `fadings` library of tikz [23].

### 15.1 Vignette Drawing

N 2016-04-22

```
\tcbvignette{\langle options\rangle}
```

In this context, a *vignette* is a four part rectangular frame. It is constructed as several TikZ paths and, therefore, can only be used inside a `tikzpicture` environment or inside `tcolorbox`<sup>→ P. 12</sup> options.

The `\langle options\rangle` control position, size and style settings of the vignette. Theses options have the common key path `/tcb/vig/` and are described in the following.

The next examples show direct `\tcbvignette` usage without a `tcolorbox`<sup>→ P. 12</sup>.


```
\begin{tikzpicture}
  \tcbvignette{}
\end{tikzpicture}
```



```
\begin{tikzpicture}
  \node[draw,fill=blue!15!white] (A) {Test};
  \tcbvignette{outside node=A,raised color=blue}
\end{tikzpicture}
```



```
\begin{tikzpicture}
  \node[draw,fill=blue!15!white] (A) {Another Test};
  \tcbvignette{size=3mm,outside node=A,
    north style=red,east style=yellow,
    south style=blue,west style=green}
\end{tikzpicture}
```



```
\begin{tikzpicture}
  \node[inner sep=3mm,fill=red!75] (A) {Test};
  \tcbvignette{over node=A,fade in}
\end{tikzpicture}
```




`\tcbvignette` can be used directly inside appropriate options keys for `tcolorbox`<sup>→ P. 12</sup>. Note that options like `/tcb/underlay`<sup>→ P. 221</sup> need `/tcb/enhanced`<sup>→ P. 235</sup> or similar settings.

```
\begin{tcolorbox}[enhanced,size=small,sharp corners,
  colback=green!10,colframe=green!50!black,
  boxrule=1mm,titlerule=0mm,
  title=My title,center title,fonttitle=\bfseries,
  underlay={\tcbvignette{size=1mm,inside node=frame,
    raised color=green!50!black}}]
  This is a tcolorbox.
\end{tcolorbox}
```

My title  
This is a tcolorbox.

Mostly, convenient short cuts like `/tcb/underlay vignette`<sup>→ P. 306</sup> can be used to add a *vignette* to a `tcolorbox`<sup>→ P. 12</sup>. Here, `\tcbvignette` is used internally.


```
\begin{tcolorbox}[enhanced, size=small, sharp corners,
  colback=green!10, colframe=green!50!black,
  boxrule=1mm, titlerule=0mm,
  title=My title, center title, fonttitle=\bfseries,
  underlay vignette]
  This is a tcolorbox.
\end{tcolorbox}
```



## 15.2 Generic Geometry Settings


N 2016-04-22	<code>/tcb/vig/xmin=&lt;length&gt;</code>	(no default, initially 0pt)
	Sets the lower horizontal limit of a <code>\tcbvignette</code> <sup>→ P. 298</sup> .	
N 2016-04-22	<code>/tcb/vig/xmax=&lt;length&gt;</code>	(no default, initially 1cm)
	Sets the upper horizontal limit of a <code>\tcbvignette</code> <sup>→ P. 298</sup> .	
N 2016-04-22	<code>/tcb/vig/ymin=&lt;length&gt;</code>	(no default, initially 0pt)
	Sets the lower vertical limit of a <code>\tcbvignette</code> <sup>→ P. 298</sup> .	
N 2016-04-22	<code>/tcb/vig/ymax=&lt;length&gt;</code>	(no default, initially 1cm)
	Sets the upper vertical limit of a <code>\tcbvignette</code> <sup>→ P. 298</sup> .	

```
\begin{tikzpicture}
  \fill [black!20] (0,0) rectangle (3,2);
  \path [pattern=checkerboard,pattern color=black!30]
    (0,0) rectangle (3,2);
  \tcbvignette{xmin=1cm,xmax=2.5cm,ymin=0.5cm,ymax=1.75cm}
\end{tikzpicture}
```



N 2016-04-22	<code>/tcb/vig/lower left corner=&lt;coordinates&gt;</code>	(style, initially 0,0)
	Sets the lower left corner of a <code>\tcbvignette</code> <sup>→ P. 298</sup> . This style sets <code>/tcb/vig/xmin</code> and <code>/tcb/vig/ymin</code> .	
N 2016-04-22	<code>/tcb/vig/upper right corner=&lt;coordinates&gt;</code>	(style, initially 1,1)
	Sets the upper right corner of a <code>\tcbvignette</code> <sup>→ P. 298</sup> . This style sets <code>/tcb/vig/xmax</code> and <code>/tcb/vig/ymax</code> .	

```
\begin{tikzpicture}
  \fill [black!20] (0,0) rectangle (3,2);
  \path [pattern=checkerboard,pattern color=black!30]
    (0,0) rectangle (3,2);
  \tcbvignette{lower left corner={1,0.5},
    upper right corner={2.5,1.75}}
\end{tikzpicture}
```



N 2016-04-22	<code>/tcb/vig/inside node=&lt;name&gt;</code>	(style, initially unset)
	Places the <code>\tcbvignette</code> <sup>→ P. 298</sup> inside the node with the given <code>&lt;name&gt;</code> . The outer limits of the <i>vignette</i> are adapted to the node geometry.	


```
\begin{tikzpicture}
  \node[minimum width=2cm,minimum height=1cm] (A) {Node A};
  \tcbvignette{inside node=A}
  \draw[very thick] (A.south west) rectangle (A.north east);
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/outside node=⟨name⟩** (style, initially unset)

Places the `\tcbvignette`<sup>→ P. 298</sup> outside the node with the given `⟨name⟩`. The inner limits of the *vignette* are adapted to the node geometry.


```
\begin{tikzpicture}
  \node[minimum width=2cm,minimum height=1cm] (A) {Node A};
  \tcbvignette{outside node=A}
  \draw[very thick] (A.south west) rectangle (A.north east);
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/over node=⟨name⟩** (style, initially unset)

Places the `\tcbvignette`<sup>→ P. 298</sup> over the node with the given `⟨name⟩`. The outer limits of the *vignette* are adapted to the node geometry, but are shifted to the outside by `/tcb/vig/over node offset`.

```
\begin{tikzpicture}
  \node[minimum width=2cm,minimum height=1cm] (A) {Node A};
  \tcbvignette{over node offset=1mm,over node=A}
  \draw[very thick] (A.south west) rectangle (A.north east);
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/over node offset=⟨length⟩** (no default, initially 0.1mm)

Determines the shift value for `/tcb/vig/over node`. Note that `/tcb/vig/over node offset` has to be set *before* `/tcb/vig/over node` is used.

N 2016-04-22 **/tcb/vig/north size=⟨length⟩** (no default, initially 2mm)

Sets the thickness of the north *vignette* part.

```
\begin{tikzpicture}
  \tcbvignette{north size=4mm}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/south size=⟨length⟩** (no default, initially 2mm)

Sets the thickness of the south *vignette* part.

```
\begin{tikzpicture}
  \tcbvignette{south size=4mm}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/east size=⟨length⟩** (no default, initially 2mm)

Sets the thickness of the east *vignette* part.

```
\begin{tikzpicture}
  \tcbvignette{east size=4mm}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/west size=⟨length⟩** (no default, initially 2mm)

Sets the thickness of the west *vignette* part.

```
\begin{tikzpicture}
  \tcbvignette{west size=4mm}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/vertical size=<length>** (style, initially 2mm)  
Sets `/tcb/vig/north size`<sup>→ P. 300</sup> and `/tcb/vig/south size`<sup>→ P. 300</sup>, to the given `<length>`.

```
\begin{tikzpicture}
\tcbvignette{vertical size=4mm}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/horizontal size=<length>** (style, initially 2mm)  
Sets `/tcb/vig/east size`<sup>→ P. 300</sup> and `/tcb/vig/west size`<sup>→ P. 300</sup>, to the given `<length>`.

```
\begin{tikzpicture}
\tcbvignette{horizontal size=4mm}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/size=<length>** (style, initially 2mm)  
Sets `/tcb/vig/north size`<sup>→ P. 300</sup>, `/tcb/vig/south size`<sup>→ P. 300</sup>, `/tcb/vig/east size`<sup>→ P. 300</sup>, and `/tcb/vig/west size`<sup>→ P. 300</sup> to the given `<length>`.

```
\begin{tikzpicture}
\tcbvignette{size=4mm}
\end{tikzpicture}
```



! `/tcb/vig/north size`<sup>→ P. 300</sup>, `/tcb/vig/south size`<sup>→ P. 300</sup>, etc. have to be set *before* `/tcb/vig/outside node`<sup>→ P. 300</sup> is used.

### 15.3 Generic Color and Style Settings

N 2016-04-22 **/tcb/vig/north style={<style>}** (no default, initially `red!50!white`)  
Sets TikZ `<style>` options for the north *vignette* part.

```
\begin{tikzpicture}
\tcbvignette{north style=blue}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/south style={<style>}** (no default, initially `red!50!black`)  
Sets TikZ `<style>` options for the south *vignette* part.

```
\begin{tikzpicture}
\tcbvignette{south style={draw=blue,fill=yellow}}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/east style={<style>}** (no default, initially `red!75!black`)  
Sets TikZ `<style>` options for the east *vignette* part.

```
\begin{tikzpicture}
\tcbvignette{east style={left color=yellow!75!black,
right color=blue!75!black}}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/west style={<style>}** (no default, initially red!75!white)

Sets TikZ *<style>* options for the west *vignette* part.

```
\begin{tikzpicture}
  \tcbvignette{west style={preaction={fill=black!20},
    pattern=checkerboard,
    pattern color=black!30}}
\end{tikzpicture}
```



N 2016-05-24 **/tcb/vig/scope={<style>}** (no default, initially empty)

The four *vignette* parts are drawn inside a TikZ *scope* environment which takes the given *<style>* as option.

```
\begin{tikzpicture}
  \tcbvignette{scope={transparency group,opacity=0.25}}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/raised color=<color>** (no default)

Creates a raised frame impression by setting the four style options */tcb/vig/north style*<sup>→ P. 301</sup>, */tcb/vig/south style*<sup>→ P. 301</sup>, */tcb/vig/east style*<sup>→ P. 301</sup>, and */tcb/vig/west style* to darkened and lightened variations of the given *<color>*.

```
\begin{tikzpicture}
  \tcbvignette{raised color=blue}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/lowered color=<color>** (no default)

Creates a lowered frame impression by setting the four style options */tcb/vig/north style*<sup>→ P. 301</sup>, */tcb/vig/south style*<sup>→ P. 301</sup>, */tcb/vig/east style*<sup>→ P. 301</sup>, and */tcb/vig/west style* to darkened and lightened variations of the given *<color>*.

```
\begin{tikzpicture}
  \tcbvignette{lowered color=green!75!black}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/color from=<inner> to <outer>** (no default)

Sets the four style options */tcb/vig/north style*<sup>→ P. 301</sup>, */tcb/vig/south style*<sup>→ P. 301</sup>, */tcb/vig/east style*<sup>→ P. 301</sup>, and */tcb/vig/west style* such that the color shades from the *<inner>* color to the *<outer>* color.

```
\begin{tikzpicture}
  \tcbvignette{color from=red to blue!50}
\end{tikzpicture}
```



N 2016-04-22 **/tcb/vig/base color=<color>** (no default)

Sets the base color for */tcb/vig/raised color*, */tcb/vig/lowered color*, */tcb/finish fading vignette*<sup>→ P. 309</sup>. Typically, this value has not to be set directly.

Especially, if shadings or fadings are used, the drawn *vignette* graphs are displayed sometimes not as perfect as expected. Glitches and imperfections are very dependent on the previewer software. The /tcb/vig/draw method intends to give a choice of alternative drawing methods.

- **direct**: The *vignette* parts are drawn/filled by using a single TikZ graph. This is the preferred (and default) method for solid color graphs.
- **clipped**: The *vignette* parts are drawn somewhat oversized and are clipped to the intended region. In combination with shadings and fadings this seems to give a better/different optical result (depends on the previewer).

```
\begin{tikzpicture}
  \tcbvignette{color from=red to yellow}
\end{tikzpicture}
```



```
\begin{tikzpicture}
  \tcbvignette{color from=red to yellow,draw method=clipped}
\end{tikzpicture}
```



This option is a stopgap and may be changed or preferably removed in future.

## 15.4 Generic Fading Settings

The `fadings` library of `tikz` [23] is loaded automatically by the `vignette` library. Amongst others, the fadings `west`, `east`, `north`, and `south` are defined inside the `fadings` library.

The `vignette` library adds some more fadings called `semi west`, `semi east`, `semi north`, and `semi south`. These fadings are much *weaker* than the normal fadings.

```
\begin{tikzpicture}
  \fill [black!20] (0,0) rectangle (1,1);
  \path [pattern=checkerboard,pattern color=black!30]
    (0,0) rectangle (1,1);
  \fill [path fading=semi west,blue] (0,0) rectangle (1,1);
\end{tikzpicture}
```



### Comparison of the Fadings

`west`



`east`



`north`



`south`



`semi west`



`semi east`



`semi north`



`semi south`




N 2016-04-22

### /tcb/vig/fade in={⟨style⟩}

(style, default white)

Sets the four style options /tcb/vig/north style<sup>→ P. 301</sup>, /tcb/vig/south style<sup>→ P. 301</sup>, /tcb/vig/east style<sup>→ P. 301</sup>, and /tcb/vig/west style<sup>→ P. 302</sup> such that the paths fade from outside to inside.

```
\begin{tikzpicture}
  \fill [black!20] (-0.5,-0.5) rectangle (1.5,1.5);
  \path [pattern=checkerboard,pattern color=black!30]
    (-0.5,-0.5) rectangle (1.5,1.5);
  \tcbvignette{fade in=blue}
\end{tikzpicture}
```




N 2016-04-22

### /tcb/vig/fade out={⟨style⟩}

(style, default white)

Sets the four style options /tcb/vig/north style<sup>→ P. 301</sup>, /tcb/vig/south style<sup>→ P. 301</sup>, /tcb/vig/east style<sup>→ P. 301</sup>, and /tcb/vig/west style<sup>→ P. 302</sup> such that the paths fade from inside to outside.

```
\begin{tikzpicture}
  \fill [black!20] (-0.5,-0.5) rectangle (1.5,1.5);
  \path [pattern=checkerboard,pattern color=black!30]
    (-0.5,-0.5) rectangle (1.5,1.5);
  \tcbvignette{fade out=blue}
\end{tikzpicture}
```




N 2016-04-22

### /tcb/vig/semi fade in={⟨style⟩}

(style, default white)

Sets the four style options /tcb/vig/north style<sup>→ P. 301</sup>, /tcb/vig/south style<sup>→ P. 301</sup>, /tcb/vig/east style<sup>→ P. 301</sup>, and /tcb/vig/west style<sup>→ P. 302</sup> such that the paths fade weak from outside to inside.

```
\begin{tikzpicture}
  \fill [black!20] (-0.5,-0.5) rectangle (1.5,1.5);
  \path [pattern=checkerboard,pattern color=black!30]
    (-0.5,-0.5) rectangle (1.5,1.5);
  \tcbvignette{semi fade in=blue}
\end{tikzpicture}
```




N 2016-04-22

### /tcb/vig/semi fade out={⟨style⟩}

(style, default white)


Sets the four style options /tcb/vig/north style<sup>→ P. 301</sup>, /tcb/vig/south style<sup>→ P. 301</sup>, /tcb/vig/east style<sup>→ P. 301</sup>, and /tcb/vig/west style<sup>→ P. 302</sup> such that the paths fade weak from inside to outside.

```
\begin{tikzpicture}
  \fill [black!20] (-0.5,-0.5) rectangle (1.5,1.5);
  \path [pattern=checkerboard,pattern color=black!30]
    (-0.5,-0.5) rectangle (1.5,1.5);
  \tcbvignette{semi fade out=blue}
\end{tikzpicture}
```




It is possible to assign different fadings for each side of the vignette, if needed. Therefore, the fadings have to be applied individually with the four style options `/tcb/vig/north style`<sup>→ P. 301</sup>, `/tcb/vig/south style`<sup>→ P. 301</sup>, `/tcb/vig/east style`<sup>→ P. 301</sup>, and `/tcb/vig/west style`<sup>→ P. 302</sup>.

```
\begin{tikzpicture}
\fill [black!20] (-0.5,-0.5) rectangle (1.5,1.5);
\path [pattern=checkerboard,pattern color=black!30]
(-0.5,-0.5) rectangle (1.5,1.5);
\tcbvignette{
    north style={blue,path fading=south},
    east style ={blue,path fading=semi west},
    south style={blue,path fading=semi north},
    west style ={blue,path fading=east}
}
\end{tikzpicture}
```



```
\begin{tikzpicture}
\fill [black!20] (-0.5,-0.5) rectangle (1.5,1.5);
\path [pattern=checkerboard,pattern color=black!30]
(-0.5,-0.5) rectangle (1.5,1.5);
\tcbvignette{
    north style={blue,path fading=west},
    east style ={blue,path fading=south},
    south style={red,path fading=east},
    west style ={red,path fading=north}
}
\end{tikzpicture}
```



## 15.5 Vignette as Underlay


N 2016-04-22

`/tcb/underlay vignette={⟨options⟩}`

(style, no default)

This puts a `\tcbvignette`<sup>→ P. 298</sup> with the given `⟨options⟩` as `/tcb/underlay`<sup>→ P. 221</sup> to a `tcolorbox`<sup>→ P. 12</sup>. The dimensions of the *vignette* are matched to the dimensions of the `tcolorbox`<sup>→ P. 12</sup>. For example, `/tcb/leftrule`<sup>→ P. 42</sup> is used as `/tcb/vig/west size`<sup>→ P. 300</sup>. Also, `/tcb/colframe`<sup>→ P. 34</sup> is used as `/tcb/vig/raised color`<sup>→ P. 302</sup>. For a `/tcb/breakable`<sup>→ P. 408</sup> `tcolorbox`, the *vignette* is also been broken. Alternatively, `\tcbvignette`<sup>→ P. 298</sup> could be used directly inside an `/tcb/underlay`<sup>→ P. 221</sup> with appropriate settings.

```
\begin{tcolorbox}[enhanced,size=small,sharp corners,
colback=green!10,colframe=green!50!black,
boxrule=2mm,titlerule=0mm,
title=My title,center title,fonttitle=\bfseries,
underlay vignette]
This is a tcolorbox.
\end{tcolorbox}
```



```
\begin{tcolorbox}[enhanced,size=small,arc=0pt,
colback=blue!10,colframe=blue,boxrule=2mm,
underlay vignette={size=1.5mm}]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

```
\begin{tcolorbox}[enhanced,size=small,sharp corners,
colframe=red,interior hidden,boxrule=2mm,
colupper=white,center upper,fontupper=\bfseries,
underlay vignette]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

```
\begin{tcolorbox}[enhanced,size=small,sharp corners,
colback=red!50!yellow,frame hidden,boxrule=2mm,
underlay vignette={color from=red!50!yellow to white,
draw method=clipped,size=2.1mm}]
This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

```
\tcbx[enhanced,sharp corners,colback=red!10,colframe=red]
{Test}

\tcbx[enhanced,sharp corners,colback=red!10,colframe=red,
underlay vignette]{Test}
```

Test

Test

N 2016-04-22

### /tcb/underlay raised shading vignette={⟨options⟩}

(style, no default)

This is a special style derived from /tcb/underlay vignette<sup>→ P. 306</sup>, where the frame color is shaded to create a soft raised frame impression.

```
\begin{tcolorbox}[enhanced,sharp corners,
  colback=green!10,
  colframe=green!50!black,
  size=small,boxrule=2mm,titlerule=0mm,
  title=My title,center title,fonttitle=\bfseries,
  underlay raised shading vignette]
  This is a tcolorbox.
\end{tcolorbox}
```

My title  
This is a tcolorbox.

N 2016-04-22

### /tcb/underlay raised fading vignette={⟨options⟩}

(style, no default)

This style gives a similar effect as /tcb/underlay raised shading vignette, but a path fading is used here. Different optical impression are very previewer-dependent.

```
\begin{tcolorbox}[enhanced,sharp corners,
  colback=green!10,
  colframe=green!50!black,
  size=small,boxrule=2mm,titlerule=0mm,
  title=My title,center title,fonttitle=\bfseries,
  underlay raised fading vignette]
  This is a tcolorbox.
\end{tcolorbox}
```

My title  
This is a tcolorbox.

N 2016-04-22

### /tcb/underlay shade in vignette={⟨options⟩}

(style, no default)

This is a special style derived from /tcb/underlay vignette<sup>→ P. 306</sup>, where the frame color is shaded into the interior color.

```
\begin{tcolorbox}[enhanced,sharp corners,frame hidden,
  colback=green!10,
  colframe=green!50!black,
  size=small,boxrule=2mm,titlerule=0mm,
  underlay shade in vignette]
  This is a tcolorbox.
\end{tcolorbox}
```

This is a tcolorbox.

## 15.6 Vignette as Finish

N 2016-04-22

/tcb/finish vignette={⟨options⟩}

(style, no default)

This puts a `\tcbvignette`<sup>→ P. 298</sup> with the given ⟨options⟩ as `/tcb/finish`<sup>→ P. 223</sup> to a `tcolorbox`<sup>→ P. 12</sup>. The default style settings create a raised frame impression by drawing black and white color parts with reduced opacity.

```
\begin{tcolorbox}[enhanced,size=small,
  colback=green!10,colframe=green!50!black,
  boxrule=0.5mm,titlerule=0mm,
  title=My title,center title,fonttitle=\bfseries,
  finish vignette={size=1mm}]
  This is a tcolorbox.
\end{tcolorbox}
```

My title

This is a tcolorbox.

```
\tcbincludegraphics[blankest,width=3cm,
  finish vignette={size=3mm}]{pink_marble.png}
```



N 2016-04-22

/tcb/finish raised fading vignette={⟨options⟩}

(style, no default)

This puts a `\tcbvignette`<sup>→ P. 298</sup> with the given ⟨options⟩ as `/tcb/finish`<sup>→ P. 223</sup> to a `tcolorbox`<sup>→ P. 12</sup>. The default style settings create a soft raised frame impression by drawing fading black and white color parts.

```
\begin{tcolorbox}[enhanced,size=small,
  colback=green!10,colframe=green!50!black,
  boxrule=0.5mm,titlerule=0mm,
  title=My title,center title,fonttitle=\bfseries,
  finish raised fading vignette={size=1mm}]
  This is a tcolorbox.
\end{tcolorbox}
```

My title

This is a tcolorbox.

```
\tcbincludegraphics[blankest,width=3cm,
  finish raised fading vignette={size=3mm}]{pink_marble.png}
```



This puts a `\tcbvignette`<sup>P. 298</sup> with the given `<options>` as `/tcb/finish`<sup>P. 223</sup> to a `tcolorbox`<sup>P. 12</sup>. The default style settings fade the box into white from inside to outside. Note that `/tcb/vig/over node`<sup>P. 300</sup> is used here. `/tcb/vig/over node offset`<sup>P. 300</sup> can be adapted to overlap the box more or less. The fade color can be set using `/tcb/vig/base color`<sup>P. 302</sup>.

```
\begin{tcolorbox}[enhanced,size=small,
  colback=green!10,colframe=green!50!black,
  boxrule=0.5mm,titlerule=0mm,
  title=My title,center title,fonttitle=\bfseries,
  finish fading vignette={size=2mm}]
  This is a tcolorbox.
\end{tcolorbox}
```

My title

This is a tcolorbox.

```
\tcbincludegraphics[blankest,width=3cm,
  finish fading vignette={size=3mm}]{pink_marble.png}
```



```
\begin{tcolorbox}[colback=blue!50!black,size=small,
  title=Example]
\tcbincludegraphics[blankest,
  finish fading vignette={base color=blue!50!black,size=3mm,
  over node offset=0.2mm}]{pink_marble.png}
\end{tcolorbox}
```


Example



```

\begin{tcbitemize}[raster columns=3,bicolor,
raster equal height,sharp corners,boxrule=2mm,
colframe=red,colback=yellow!5,colbacklower=yellow!25!red!20]
\tcbitem A
\tcbitem[underlay vignette] B
\tcbitem[underlay={\tcbvignette{inside node=interior,
lowered color=red,size=1mm}}] C
\tcbitem[underlay vignette,
underlay={\tcbvignette{inside node=interior,
lowered color=red,size=1mm}}] D
\tcbitem[boxrule=3mm,underlay vignette={size=2mm},
underlay={\tcbvignette{inside node=interior,
lowered color=red,size=1mm}}] E
\tcbitem[underlay raised shading vignette] F
\tcbitem[underlay raised shading vignette,
underlay={\tcbvignette{inside node=interior,
lowered color=red,size=1mm}}] G
\tcbitem[title=H1,underlay={\tcbvignette{inside node=interior,
lowered color=red,size=1mm}},finish vignette] H2
\tcbitem[boxrule=0.25mm,colback=red!30,finish vignette] I1 \tcblower I2
\tcbitem[title,colback=red!30,finish raised fading vignette] J1 \tcblower J2
\tcbitem[boxrule=1mm,underlay={\tcbvignette{inside node=interior,
raised color=red,size=1mm}}] K
\tcbitem[boxrule=1mm,title=L1,underlay={\tcbvignette{inside node=title,
lowered color=red,size=0.5mm}}] L2
\end{tcbitemize}

```

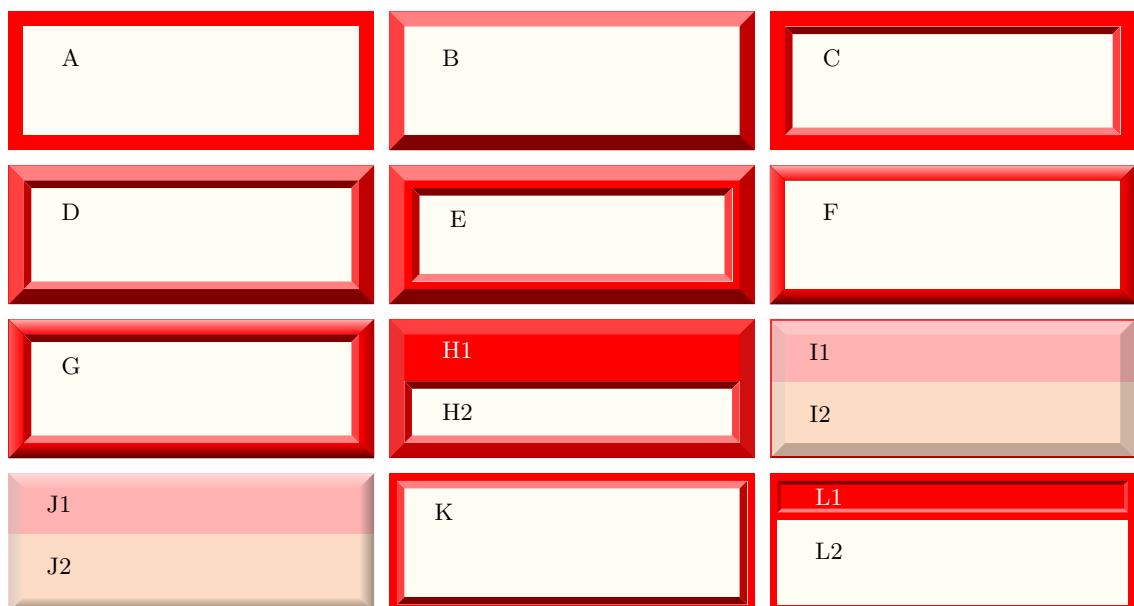


The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{raster}
```

### 16.1 Concept of Rasters

A *raster* is used to align several colored boxes in a regular way. It can be seen as a far related counterpart to the `matrix` construct of TikZ, but it differs in many aspects.

In principle, `tcolorboxes` are arranged in rows and columns when put inside a `tcb raster`<sup>P.313</sup> environment. The boxes are fluently added to the raster like adding text to a paragraph. Especially, line/row breaks are done automatically and one cannot end a line/row ahead of schedule. Further, a *raster* is not restricted to a single page but may break into an arbitrary series of pages.

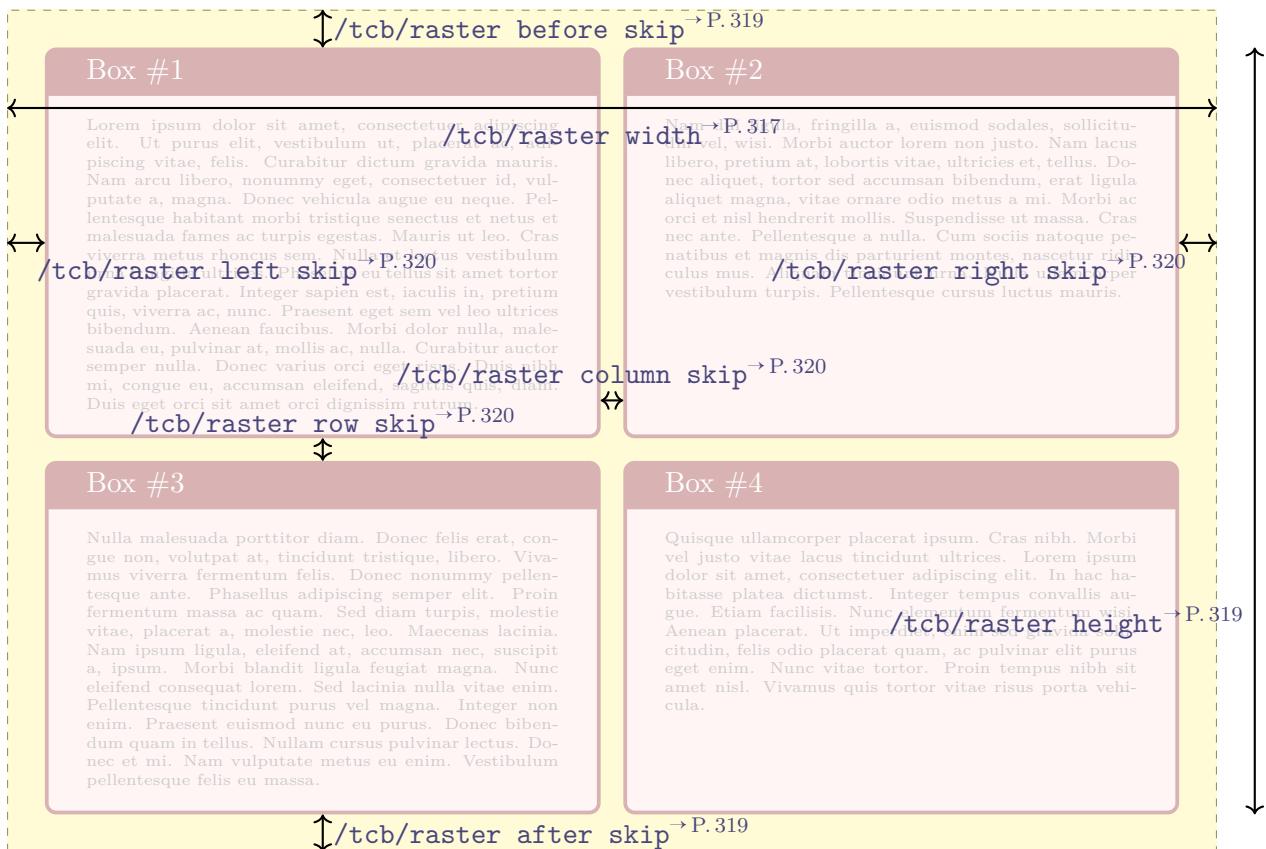

```

\begin{tcbraster}[raster columns=3,raster rows=3,raster height=\linewidth,
enhanced,size=small,sharp corners,arc=8mm,colframe=red!50!black,
colback=yellow!10!white,watermark overzoom=1.0,fit algorithm=hybrid* ]
\begin{tcolorbox}[rounded corners=northwest,boxrule=0pt,
watermark graphics=lichtspiel.jpg]\end{tcolorbox}
\tcboxif{\lipsum[1]}
\begin{tcolorbox}[rounded corners=northeast,boxrule=0pt,
watermark graphics=goldshade.png]\end{tcolorbox}
\tcboxif{\lipsum[2]}
\begin{tcolorbox}[valign=center,halign=center]Nine Boxes.\end{tcolorbox}
\tcboxif{\lipsum[3]}
\begin{tcolorbox}[rounded corners=southwest,boxrule=0pt,
watermark graphics=goldshade.png]\end{tcolorbox}
\tcboxif{\lipsum[4]}
\begin{tcolorbox}[rounded corners=southeast,boxrule=0pt,
watermark graphics=lichtspiel.jpg]\end{tcolorbox}
\end{tcbraster}

```




Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique semper et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### Nine Boxes.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellenesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellenesque felis eu massa.

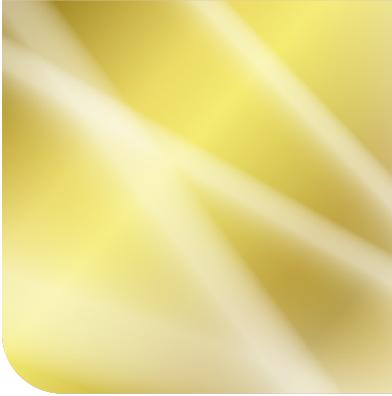

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.



## 16.2 Macros of the Library


N 2014-11-10  
U 2017-02-01

```
\begin{tcbraster}[\langle options\rangle]
  <environment content>
\end{tcbraster}
```


A raster arranges enclosed boxes in a regular way, mainly into rows and columns. The *<options>* are used to control the raster parameters and to set the properties for the enclosed boxes.

- The *raster* is only allowed to contain a series of `tcolorbox`<sup>P. 12</sup> environments or derived constructs. With some small restrictions, boxes created with `\tcbboxfit`<sup>P. 457</sup> can also be added. Boxes created with `\tcbbox`<sup>P. 14</sup> are not reasonable here, but may be used to a certain degree.
- Do not add anything else between the boxes inside the raster with exception of white-space. Especially, do not use `\backslash` or `\par` to end a row; row breaks are done automatically.
- The boxes inside a raster are numbered automatically. `\thetcbasternum` may be used inside a box to access this number. The L<sup>A</sup>T<sub>E</sub>X counter `tcbastercolumn` holds the current column, the counter `tcbasterrow` holds the current row, and the counter `tcbasternum` holds the current box number.

```
\begin{tcbraster}[raster columns=3, raster equal height,
  size=small,colframe=red!50!black,colback=red!10!white,colbacktitle=red!50!white,
  title={Box \# \thetcbasternum}]
  \begin{tcolorbox}First box\end{tcolorbox}
  \begin{tcolorbox}Second box\end{tcolorbox}
  \begin{tcolorbox}This is a box\\with a second line\end{tcolorbox}
  \begin{tcolorbox}Another box\end{tcolorbox}
  \begin{tcolorbox}A box again\end{tcolorbox}
\end{tcbraster}
```

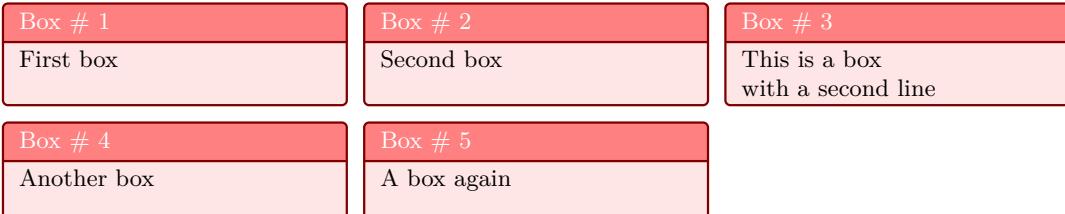

```
\begin{tcbraster}[raster columns=2, raster equal height=rows,
  size=small,colframe=red!50!black,colback=red!10!white,colbacktitle=red!50!white,
  title={Box \# \thetcbasternum}]
  \begin{tcolorbox}First box\end{tcolorbox}
  \begin{tcolorbox}Second box\end{tcolorbox}
  \begin{tcolorbox}This is a box\\with a second line\end{tcolorbox}
  \begin{tcolorbox}Another box\end{tcolorbox}
  \begin{tcolorbox}A box again\end{tcolorbox}
\end{tcbraster}
```

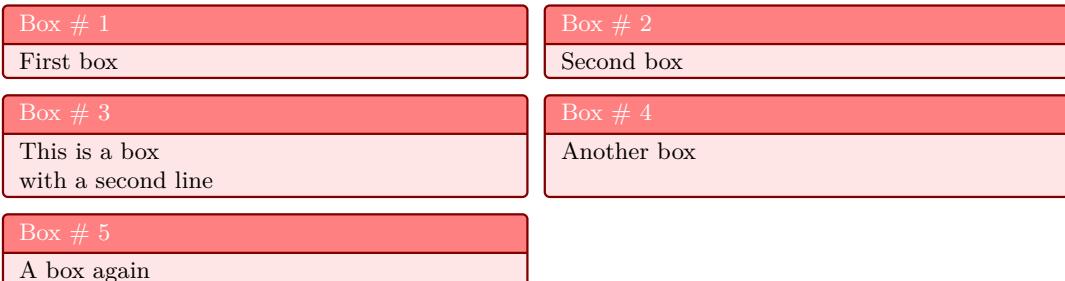

N 2014-11-10


```
\begin{tcbitemize}[\langle options\rangle]
  <environment content>
\end{tcbitemize}
```

This is a special case of a `tcbraster`<sup>→ P. 313</sup> with the given `\langle options\rangle`.

- Here, the enclosed boxes are created using `\tcbitem`.
- There has to be at least one `\tcbitem`.
- One cannot use anything else than `\tcbitem` to add something to the *raster*.

This leads to a very compact syntax.

```
\begin{tcbitemize}[raster columns=2, raster equal height=rows,
  size=small,colframe=red!50!black,colback=red!10!white,colbacktitle=red!50!white,
  title={Box \# \thetcbasternum}]
  \tcbitem First box
  \tcbitem Second box
  \tcbitem This is a box\with a second line
  \tcbitem[colback=yellow,colbacktitle=yellow!50!black] Another box
  \tcbitem A box again
\end{tcbitemize}
```

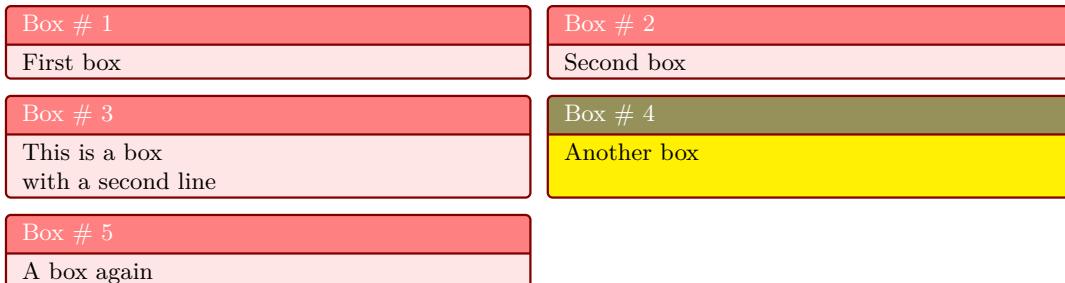

`tcbitemize` has more restrictions than `tcbraster`<sup>→ P. 313</sup>. Especially, the `/tcb/capture`<sup>→ P. 109</sup> mode has to be `minipage`. For example, `/tcb/fit`<sup>→ P. 462</sup> cannot be used safely. If `/tcb/fit`<sup>→ P. 462</sup> should be used, turn over to `tcbraster`<sup>→ P. 313</sup>.

N 2014-11-10

```
\tcbitem[\langle options\rangle]
```

Used inside `tcbitemize` to create a new `tcolorbox`<sup>→ P. 12</sup> with the given `\langle options\rangle`.

```
\begin{tcboxedraster}[\textit{raster options}]{\textit{box options}}
  <environment content>
\end{tcboxedraster}
```

This is a convenience environment which combines a `tcolorbox`<sup>→ P. 12</sup> with an embedded `tcbraster`<sup>→ P. 313</sup>. The `<box options>` are given to the outer `tcolorbox`<sup>→ P. 12</sup>, while the `<raster options>` are given to the embedded `tcbraster`<sup>→ P. 313</sup>. This environment is especially useful for rasters inside rasters.

```
\begin{tcboxedraster}[raster columns=3, raster equal height,
  size=small,colframe=red!50!black,colback=red!10!white,colbacktitle=red!50!white,
  title={Box \# \thetcbrasternum}]
  {colback=yellow!10,fonttitle=\bfseries,title=Boxed Raster}
  \begin{tcolorbox}First box\end{tcolorbox}
  \begin{tcolorbox}Second box\end{tcolorbox}
  \begin{tcolorbox}This is a box\\with a second line\end{tcolorbox}
  \begin{tcolorbox}Another box\end{tcolorbox}
  \begin{tcolorbox}A box again\end{tcolorbox}
\end{tcboxedraster}
```

### Boxed Raster

Box # 1 First box	Box # 2 Second box	Box # 3 This is a box with a second line
Box # 4 Another box	Box # 5 A box again	

```
% \tcbuselibrary{skins}
\begin{tcbraster}[raster columns=2, raster equal height,
  raster every box/.style={size=small,colframe=red!50!black,colback=red!10!white,
  valign=center,halign=center}]
  \begin{tcolorbox}One\end{tcolorbox}
  \begin{tcolorbox}Two\end{tcolorbox}
  \begin{tcboxedraster}{blankest}
    \begin{tcolorbox}Three\end{tcolorbox}
    \begin{tcolorbox}Four\end{tcolorbox}
    \begin{tcolorbox}Five\end{tcolorbox}
    \begin{tcolorbox}Six\end{tcolorbox}
  \end{tcboxedraster}
  \begin{tcolorbox}Seven\end{tcolorbox}
\end{tcbraster}
```

One

Two

Three

Four

Five

Six

Seven

N 2016-04-27

```
\begin{tcboxeditemize}[\langle raster options\rangle]{\langle box options\rangle}
  \langle environment content\rangle
\end{tcboxeditemize}
```

This is a convenience environment which combines a `tcolorbox`<sup>→ P. 12</sup> with an embedded `tcbitemize`<sup>→ P. 314</sup>. The `\langle box options\rangle` are given to the outer `tcolorbox`<sup>→ P. 12</sup>, while the `\langle raster options\rangle` are given to the embedded `tcbitemize`<sup>→ P. 314</sup>. This environment is especially useful for rasters inside rasters.

```
\begin{tcboxeditemize}[raster columns=3, raster equal height,
  size=small,colframe=red!50!black,colback=red!10!white,colbacktitle=red!50!white,
  title={Box \# \thetcbasternum}]
  {colback=yellow!10,fonttitle=\bfseries,title=Boxed Itemize}
  \tcbitem First box
  \tcbitem Second box
  \tcbitem This is a box\with a second line
  \tcbitem Another box
  \tcbitem A box again
\end{tcboxeditemize}
```

### Boxed Itemize

Box # 1 First box	Box # 2 Second box	Box # 3 This is a box with a second line
Box # 4 Another box	Box # 5 A box again	


### 16.3 Option Keys of the Library

N 2014-11-10

/tcb/raster columns=<number> (no default, initially 2)

Sets the <number> of columns for a *raster*.

```
\begin{tcbitemize}[raster columns=3,
  size=small,colframe=red!50!black,colback=red!10!white]
  \tcbitem One
  \tcbitem Two
  \tcbitem Three
  \tcbitem Four
\end{tcbitemize}
\begin{tcbitemize}[raster columns=4,
  size=small,colframe=blue!50!black,colback=blue!10!white]
  \tcbitem One
  \tcbitem Two
  \tcbitem Three
  \tcbitem Four
\end{tcbitemize}
```

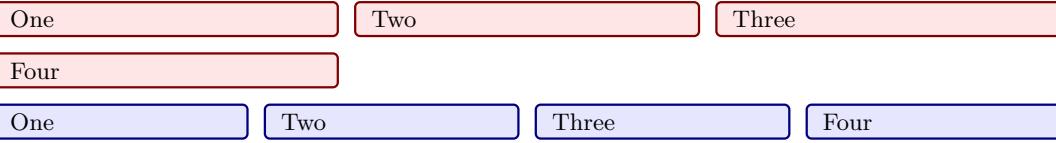

N 2014-11-10

/tcb/raster rows=<number> (no default, initially 2)

Sets the <number> of rows for a *raster*. Note that this is only relevant in connection with setting /tcb/raster height<sup>→ P. 319</sup> to a value greater than Opt. Then, it defines the number of rows *per* given height.

N 2014-11-10

/tcb/raster width=<length> (no default, initially \linewidth)

Sets the total raster width to the given <length>. /tcb/raster left skip<sup>→ P. 320</sup> and /tcb/raster right skip<sup>→ P. 320</sup> are part of the total width. Note that both skip values are not changed by this option.

```
\begin{tcbitemize}[raster width=\linewidth/2,
  size=small,colframe=red!50!black,colback=red!10!white]
  \tcbitem One
  \tcbitem Two
  \tcbitem Three
  \tcbitem Four
\end{tcbitemize}
```



N 2018-11-30

### /tcb/raster width flush left=<length>

(style, no default)

Sets the total /tcb/raster width<sup>P.317</sup> to \linewidth and adapts /tcb/raster left skip<sup>P.320</sup> and /tcb/raster right skip<sup>P.320</sup> to place the raster on the left hand side with a visual width of the given <length>.

```
\begin{tcbitemize}[raster width flush left=\linewidth/2,
  size=small,colframe=red!50!black,colback=red!10!white]
  \tcbitem One
  \tcbitem Two
  \tcbitem Three
  \tcbitem Four
\end{tcbitemize}
```



Note that the results of /tcb/raster width<sup>P.317</sup> and /tcb/raster width flush left look identical, but differ on technical side since the later always fills the available \linewidth.

N 2018-11-30

### /tcb/raster width center=<length>

(style, no default)

Sets the total /tcb/raster width<sup>P.317</sup> to \linewidth and adapts /tcb/raster left skip<sup>P.320</sup> and /tcb/raster right skip<sup>P.320</sup> to center the raster with a visual width of the given <length>.

```
\begin{tcbitemize}[raster width center=\linewidth/2,
  size=small,colframe=red!50!black,colback=red!10!white]
  \tcbitem One
  \tcbitem Two
  \tcbitem Three
  \tcbitem Four
\end{tcbitemize}
```



N 2018-11-30

### /tcb/raster width flush right=<length>

(style, no default)

Sets the total /tcb/raster width<sup>P.317</sup> to \linewidth and adapts /tcb/raster left skip<sup>P.320</sup> and /tcb/raster right skip<sup>P.320</sup> to place the raster on the right hand side with a visual width of the given <length>.

```
\begin{tcbitemize}[raster width flush right=\linewidth/2,
  size=small,colframe=red!50!black,colback=red!10!white]
  \tcbitem One
  \tcbitem Two
  \tcbitem Three
  \tcbitem Four
\end{tcbitemize}
```




N 2014-11-10

/tcb/raster height=<length>

(no default, initially Opt)

Sets the raster height per /tcb/raster rows<sup>→P.317</sup> to the given <length>. This forces an appropriate height for the enclosed boxes. /tcb/raster before skip and /tcb/raster after skip are not part of this calculation. If the <length> is set to Opt, this feature is deactivated.

```
\begin{tcbitemize}[raster height=4cm, raster rows=2,
size=small,colframe=red!50!black,colback=red!10!white]
\tcbitem One
\tcbitem Two
\tcbitem[enhanced,
  finish={\draw[blue,very thick,<->] (frame.south)
  -- node[right,pos=.75]{4cm} +(0,4); }]
Three
\tcbitem Four
\tcbitem Five
\end{tcbitemize}
```

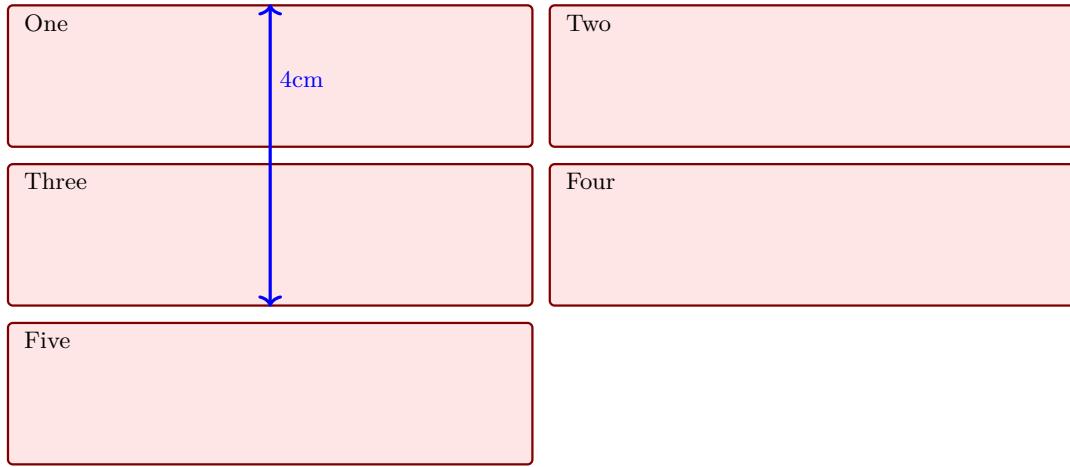

N 2014-11-10

U 2014-12-16

/tcb/raster before skip=<glue>

(no default, initially 2mm)

Space of the given <glue> is inserted vertically before the raster. This space is discardable.

N 2014-11-10

U 2014-12-16

/tcb/raster after skip=<glue>

(no default, initially 2mm)

Space of the given <glue> is inserted vertically after the raster. This space is discardable.


N 2015-01-08

/tcb/raster equal skip=<length>

(style, no default)

Shortcut to set /tcb/raster before skip, /tcb/raster after skip, /tcb/raster column skip<sup>→P.320</sup>, and /tcb/raster row skip<sup>→P.320</sup> to the same <length> value.

```
\begin{tcbitemize}[raster equal skip=4mm,
size=small,colframe=red!50!black,colback=red!10!white]
\tcbitem One
\tcbitem Two
\tcbitem Three
\tcbitem Four
\end{tcbitemize}
```



N 2014-11-10

### /tcb/raster left skip=<length>

(no default, initially 0pt)

Space of the given <length> is inserted horizontally left of the *raster*.

```
\begin{tcbitemize}[raster left skip=2cm,  
size=small,colframe=red!50!black,colback=red!10!white]  
  \tcbitem One  
  \tcbitem Two  
  \tcbitem Three  
  \tcbitem Four  
\end{tcbitemize}
```

One

Two

Three

Four

N 2014-11-10

### /tcb/raster right skip=<length>

(no default, initially 0pt)

Space of the given <length> is inserted horizontally right of the *raster*.

```
\begin{tcbitemize}[raster right skip=2cm,  
size=small,colframe=red!50!black,colback=red!10!white]  
  \tcbitem One  
  \tcbitem Two  
  \tcbitem Three  
  \tcbitem Four  
\end{tcbitemize}
```

One

Two

Three

Four

N 2014-11-10

### /tcb/raster column skip=<length>

(no default, initially 2mm)

Space of the given <length> is inserted horizontally between the columns.

```
\begin{tcbitemize}[raster column skip=2cm,  
size=small,colframe=red!50!black,colback=red!10!white]  
  \tcbitem One  
  \tcbitem Two  
  \tcbitem Three  
  \tcbitem Four  
\end{tcbitemize}
```

One

Two

Three

Four

N 2014-11-10

### /tcb/raster row skip=<length>

(no default, initially 2mm)

Space of the given <length> is inserted vertically between the rows.

```
\begin{tcbitemize}[raster row skip=0pt,  
size=small,colframe=red!50!black,colback=red!10!white]  
  \tcbitem One  
  \tcbitem Two  
  \tcbitem Three  
  \tcbitem Four  
\end{tcbitemize}
```

One

Two

Three

Four

N 2014-11-10

### /tcb/raster *halign*=⟨*alignment*⟩

(no default, initially **left**)

Defines the horizontal alignment for the boxes of a *raster*, if these rows are not completely filled (mainly: the last one).

Feasible values for ⟨*alignment*⟩ are:

- **left**: align to the left side,
- **center**: align to the center,
- **right**: align to the right side.

```
\begin{tcbitemize}[raster halign=center,
  size=small,colframe=red!50!black,colback=red!10!white]
  \tcbitem One
  \tcbitem Two
  \tcbitem Three
\end{tcbitemize}
```

One

Two

Three

N 2014-11-10

### /tcb/raster *valign*=⟨*alignment*⟩

(no default, initially **center**)

Defines the vertical alignment for the boxes of a row, if the boxes do not have equal height. This sets the /tcb/box align<sup>→ P.95</sup> option.

Feasible values for ⟨*alignment*⟩ are:

- **top**: align to the top side,
- **center**: align to the center,
- **bottom**: align to the bottom side.

```
\begin{tcbitemize}[raster valign=top, raster columns=3,
  size=small,colframe=red!50!black,colback=red!10!white]
  \tcbitem \Huge One
  \tcbitem \Large Two
  \tcbitem Three
\end{tcbitemize}
\begin{tcbitemize}[raster valign=center, raster columns=3,
  size=small,colframe=blue!50!black,colback=blue!10!white]
  \tcbitem \Huge One
  \tcbitem \Large Two
  \tcbitem Three
\end{tcbitemize}
\begin{tcbitemize}[raster valign=bottom, raster columns=3,
  size=small,colframe=green!50!black,colback=green!10!white]
  \tcbitem \Huge One
  \tcbitem \Large Two
  \tcbitem Three
\end{tcbitemize}
```

One

Two

Three

One

Two

Three

One

Two

Three

### /tcb/raster equal height=<type>

(default **all**, initially **none**)

Puts the enclosed boxes into a common /tcb/equal height group<sup>→ P. 68</sup>. The <id> of the equal height group is chosen automatically, but it may be set manually by /tcb/raster equal height group. Also see /tcb/minimum for current equal height group<sup>→ P. 69</sup>. Feasible values for <type> are:

- **none**: no equal height setting,
- **rows**: all boxes in a row are set to equal height,
- **all**: all boxes in the raster are set to equal height.

Note that you have to compile twice to see changes.

```
\begin{tcbitemize}[raster equal height=rows,
size=small,colframe=red!50!black,colback=red!10!white]
\tcbitem One
\tcbitem \Huge Two
\tcbitem Three
\tcbitem Four
\end{tcbitemize}
```

One

Two

Three

Four

```
\begin{tcbitemize}[raster equal height,
size=small,colframe=red!50!black,colback=red!10!white]
\tcbitem One
\tcbitem \Huge Two
\tcbitem Three
\tcbitem Four
\end{tcbitemize}
```

One

Two

Three

Four

### /tcb/raster equal height group=<id>

(no default)

Overwrites the automatically chosen id with the given <id>. If this is used to share a common height between the *raster* and another raster or box, the /tcb/raster equal height option should be set to **all**.

```
\tcbset{size=small,colframe=red!50!black,colback=red!10!white}
\begin{tcolorbox}[equal height group=raster-manual-id]
A single box
\end{tcolorbox}
\begin{tcbitemize}[raster equal height,raster equal height group=raster-manual-id]
\tcbitem One
\tcbitem \Huge Two
\end{tcbitemize}
```

A single box

One

Two

N 2014-11-10

/tcb/raster force size=true|false

(default true, initially true)

Enforces the raster size computations onto the enclosed boxes. If set to false, individual settings can be used (for the better or worse).

```
\begin{tcbitemize}[raster force size=false, raster halign=center,
size=small,colframe=red!50!black,colback=red!10!white]
\tcbitem One
\tcbitem Two
\tcbitem[add to width=-3cm] Three
\tcbitem[add to width=-3cm] Four
\tcbitem[add to width=-3cm] Five
\tcbitem[add to width=3cm] Six
\end{tcbitemize}
```

One

Two

Three

Four

Five

Six

N 2014-11-10

/tcb/raster reset

(no value)

Sets all raster settings back to their default values. Note that /tcb/reset<sup>→ P. 123</sup> does not execute this option. Style settings like /tcb/raster odd column etc. are not touched by /tcb/raster reset.

## 16.4 Adding Styles for Specific Boxes

The following styles can be defined to address certain boxes inside a *raster*. Note that such style definitions are not removed by /tcb/reset<sup>→ P. 123</sup> or /tcb/raster reset. The style definitions are used in the order given below.

N 2014-11-24

/tcb/raster every box

(style)

This style is used for every box.

N 2014-11-10

/tcb/raster odd column

(style)

This style is used for every box in an odd column.

```
\begin{tcbitemize}[size=small,colframe=red!50!black,colback=red!10!white,
raster odd column/.style={colframe=blue!50!black,colback=blue!10!white}]
\tcbitem One
\tcbitem Two
\tcbitem Three
\tcbitem Four
\end{tcbitemize}
```

One

Two

Three

Four

N 2014-11-10

/tcb/raster even column

(style)

This style is used for every box in an even column.

N 2014-11-10

/tcb/raster column n

(style)

This style is used for every box in the n-th column. n has to be replaced by a number.

N 2014-11-10

/tcb/raster odd row

(style)

This style is used for every box in an odd row.


N 2014-11-10 **/tcb/raster even row** (style)

This style is used for every box in an even row.

N 2014-11-10 **/tcb/raster row m** (style)

This style is used for every box in the **m**-th row. **m** has to be replaced by a number.

```
\begin{tcbitemize}[size=small,colframe=red!50!black,colback=red!10!white,
raster row 2/.style={colframe=blue!50!black,colback=blue!10!white}]
\tcbitem One
\tcbitem Two
\tcbitem Three
\tcbitem Four
\end{tcbitemize}
```




N 2014-11-10 **/tcb/raster odd number** (style)

This style is used for every box with an odd number.

N 2014-11-10 **/tcb/raster even number** (style)

This style is used for every box with an even number.

```
\begin{tcbitemize}[size=small,colframe=red!50!black,colback=red!10!white,
raster columns=3,
raster even number/.style={colframe=blue!50!black,colback=blue!10!white}]
\tcbitem One
\tcbitem Two
\tcbitem Three
\tcbitem Four
\tcbitem Five
\tcbitem Six
\end{tcbitemize}
```




N 2014-11-10 **/tcb/raster row m column n** (style)

This style is used for the box in the **m**-th row and **n**-th column. **m** and **n** have to be replaced by numbers.

N 2014-11-10 **/tcb/raster number n** (style)

This style is used for the box with number **n**. **n** has to be replaced by a number.

```
\begin{tcbitemize}[size=small,colframe=red!50!black,colback=red!10!white,
raster number 4/.style={colframe=blue!50!black,colback=blue!10!white}]
\tcbitem One
\tcbitem Two
\tcbitem Three
\tcbitem Four
\end{tcbitemize}
```



## 16.5 Combining Columns or Rows


N 2016-02-19

/tcb/raster multicolumn=<number>

(no default, initially unset)

This option has to be set inside the option list of a `tcolorbox`<sup>→ P. 12</sup> inside a `tcbraster`<sup>→ P. 313</sup> or inside `\tcbitem`<sup>→ P. 314</sup> inside `tcbitemize`<sup>→ P. 314</sup>. It merges the given `<number>` of boxes into one single box on the same line. The resulting box gets the `\thetcbasternum` of the first box. If there are not enough boxes available on the current line, this option is ignored and a warning is given.

```
\begin{tcbitemize}[raster equal height=rows,raster columns=3,
    title=\thetcbasternum,colframe=red!50!black,colback=red!10!white]
\tcbitem[colframe=blue!50!black,colback=blue!10!white,raster multicolumn=1]
    multicolumn=1
\tcbitem
\tcbitem
\tcbitem[colframe=blue!50!black,colback=blue!10!white,raster multicolumn=2]
    multicolumn=2
\tcbitem
\tcbitem[colframe=blue!50!black,colback=blue!10!white,raster multicolumn=3]
    multicolumn=3
\tcbitem
\tcbitem[colframe=blue!50!black,colback=blue!10!white,raster multicolumn=2]
    multicolumn=2
\end{tcbitemize}
```

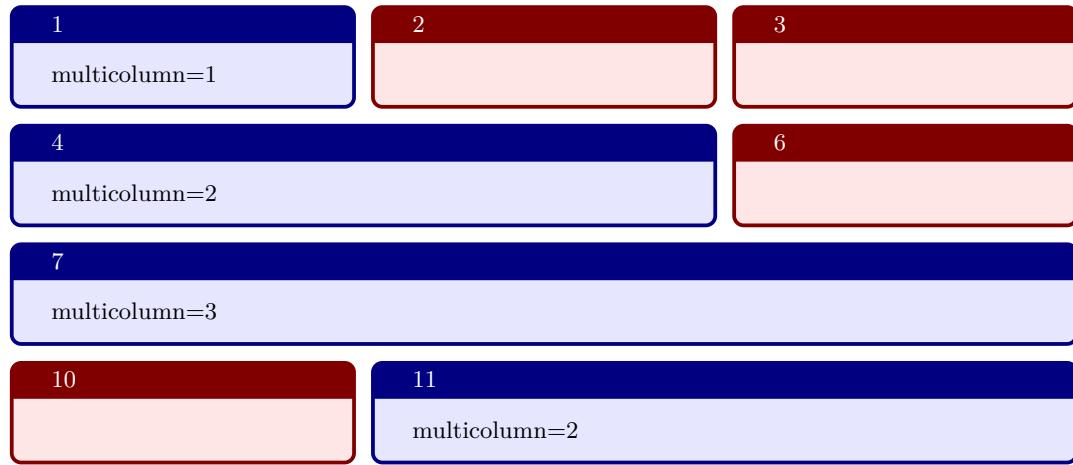


This option has to be set inside the option list of a `tcolorbox`<sup>→ P. 12</sup> inside a `tcbraster`<sup>→ P. 313</sup> or inside `\tcbitem`<sup>→ P. 314</sup> inside `tcbitemize`<sup>→ P. 314</sup>. This option not really merges boxes, but simply sizes the current box to fit the space of `<number>` rows.

!

/tcb/raster multirow needs /tcb/raster height<sup>→ P. 319</sup> to be set. How to achieve a similar result for boxes without fixed /tcb/raster height<sup>→ P. 319</sup> is shown afterwards.


```
\begin{tcbitemize}[raster rows=3,raster columns=3,raster height=6cm,
raster every box/.style={colframe=red!50!black,colback=red!10!white}]
\tcbitem
\tcbitem
\tcbitem
\tcbitem[multirow=2
multirow=2
\tcbitem[multirow=2,blankest]
\begin{tcbitemize}[raster rows=2,raster columns=2,raster height=\tcbtextheight]
\tcbitem
\tcbitem
\tcbitem
\tcbitem
\end{tcbitemize}
\end{tcbitemize}
```

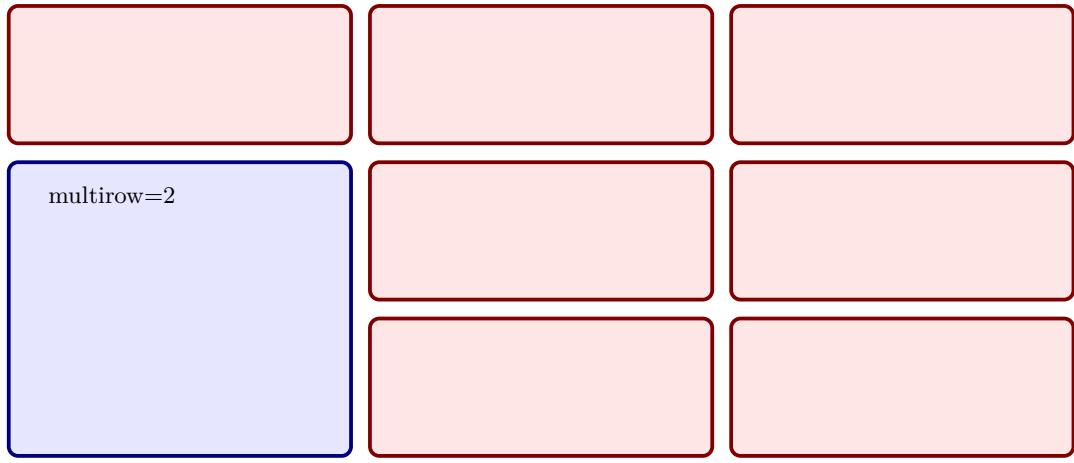

For rasters without fixed `/tcb/raster height`<sup>→ P. 319</sup>, `/tcb/raster multirow`<sup>→ P. 326</sup> cannot be used. Note that `\tcbtextheight`<sup>→ P. 171</sup> also cannot be used like in the previous example.

But, with combination of `/tcb/raster equal height`<sup>→ P. 322</sup> and `/tcb/space to`<sup>→ P. 66</sup>, a similar effect can be created:

```
\begin{tcbitemize}[raster columns=3,raster equal height=rows,
raster every box/.style={colframe=red!50!black,colback=red!10!white}]
\tcbitem
\tcbitem
\tcbitem
\tcbitem[colframe=blue!50!black,colback=blue!10!white]
\lipsum[2]
\tcbitem[raster multicolumn=2,blankest,space to=\myspace]
\begin{tcbitemize}[raster columns=2]
\tcbitem This is a box of the inner raster.
\tcbitem
\tcbitem[height=\myspace]
\tcbitem[height=\myspace]
\end{tcbitemize}
\end{tcbitemize}
```

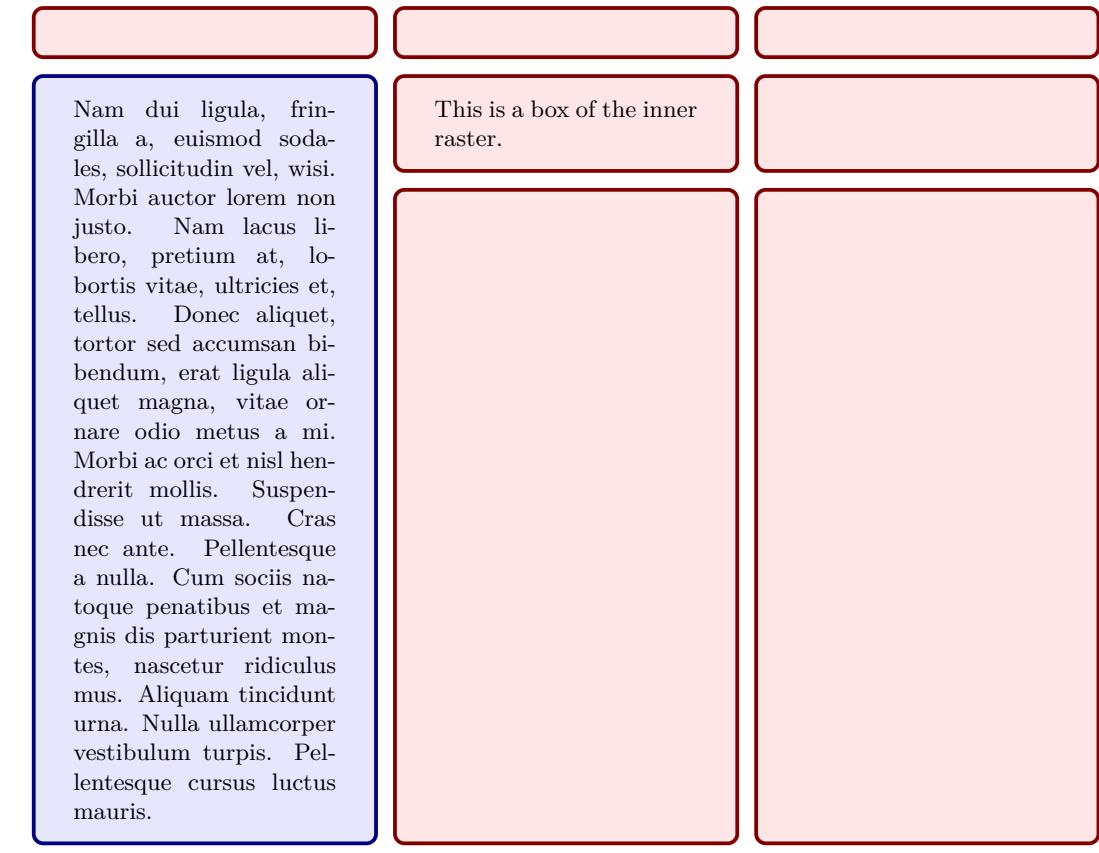

## 16.6 Rasters inside Rasters

A *raster* inside a *raster* cannot be used directly, because a *raster* can only contain a *tcolorbox* or something derived from a *tcolorbox*. So, a *raster* can be put inside a *tcolorbox* inside a *raster*.

Some examples for such constructions can be found at `\tcboxedraster`<sup>P. 315</sup>, `/tcb/raster multicolumn`<sup>P. 325</sup>, `/tcb/raster multirow`<sup>P. 326</sup>.

### 16.6.1 Raster Setup

The intermediating `tcolorbox`<sup>P. 12</sup> can be made invisible by using `/tcb/blankest`<sup>P. 271</sup>.

```
\begin{tcbraster}[raster equal height=rows,
raster every box/.style={colframe=red!50!black,colback=red!10!white}]
\begin{tcolorbox}[blankest]
\begin{tcbraster}[raster columns=1]
\begin{tcolorbox}One\end{tcolorbox}
\begin{tcolorbox}Two\end{tcolorbox}
\end{tcbraster}
\end{tcolorbox}
\begin{tcolorbox}raster+tcolorbox+raster\end{tcolorbox}
\end{tcbraster}
```

One

raster+tcolorbox+raster

Two

```
\begin{tcbraster}[raster equal height=rows,
raster every box/.style={colframe=red!50!black,colback=red!10!white}]
\begin{tcboxedraster}[raster columns=1]{blankest}
\begin{tcolorbox}One\end{tcolorbox}
\begin{tcolorbox}Two\end{tcolorbox}
\end{tcboxedraster}
\begin{tcolorbox}raster+tcboxedraster\end{tcolorbox}
\end{tcbraster}
```

One

raster+tcboxedraster

Two

```
\begin{tcbitemize}[raster equal height=rows,
raster every box/.style={colframe=red!50!black,colback=red!10!white}]
\tcbitem[blankest]
\begin{tcbitemize}[raster columns=1]
\tcbitem One
\tcbitem Two
\end{tcbitemize}
\tcbitem tcbitemize+tcbitem+tcbitemize
\end{tcbitemize}
```

One

tcbitemize+tcbitem+tcbitemize

Two

### 16.6.2 Placing Spaces

If the heights of boxes inside staggered rasters should be matched, the space has to be distributed accordingly.

- For fixed height boxes/rasters using `/tcb/raster height→ P.319`, the height of boxes is available by `\tcbtextheight→ P.171`. This can be used to size deeper layered boxes/rasters.
- For boxes/rasters laid out using `/tcb/raster equal height→ P.322`, space can be distributed by `/tcb/space to→ P.66`. It can take several compilations until all spaces are distributed correctly.

```
\begin{tcblayer}[raster rows=2,raster height=6cm,
raster every box/.style={colframe=red!50!black,colback=red!10!white}]
\tcbitem[blankest]
\begin{tcblayer}[raster columns=1,raster rows=2,raster height=\tcbtextheight]
\tcbitem One
\tcbitem Two
\end{tcblayer}
\tcbitem This is a fixed height box.
\tcbitem Three
\tcbitem Four
\end{tcblayer}
```

One

This is a fixed height box.

Two


Four

Three

```

\begin{tcbitemize}[raster columns=4,raster rows=4,raster height=0.8\linewidth,
raster every box/.style={size=small,beamer,
colframe=blue!75!yellow,colback=red!75!yellow!20,
center title,title=Box}]
\tcbitem One
\tcbitem Two
\tcbitem Three
\tcbitem Four
\tcbitem[raster multirow=2,blankest]
\begin{tcbitemize}[raster columns=1,raster rows=2,raster height=\tcbtextheight]
\tcbitem Twelve
\tcbitem Eleven
\end{tcbitemize}
\tcbitem[raster multirow=2,raster multicolumn=2,
colframe=red!75!yellow,colback=blue!75!yellow!20]
This is an example with fixed height boxes.
\tcbitem[raster multirow=2,blankest]
\begin{tcbitemize}[raster columns=1,raster rows=2,raster height=\tcbtextheight]
\tcbitem Five
\tcbitem Six
\end{tcbitemize}
\tcbitem Ten
\tcbitem Nine
\tcbitem Eight
\tcbitem Seven
\end{tcbitemize}

```

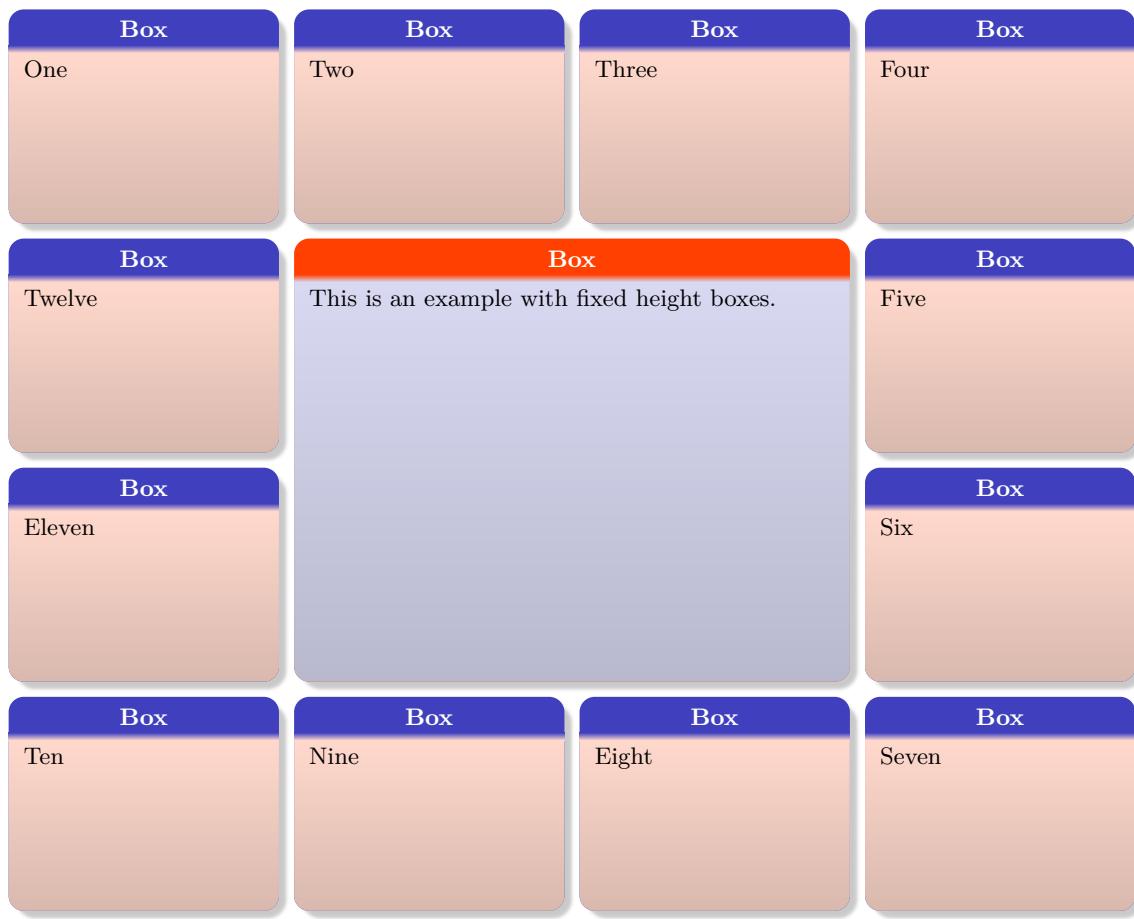

```

\begin{tcbitemize}[raster equal height=rows,
raster every box/.style={colframe=red!50!black,colback=red!10!white}]
\tcbitem[blankest,space to=\myspace]
\begin{tcbitemize}[raster columns=1]
\tcbitem One
\tcbitem[add to natural height=\myspace]
This box will adapt its height.
\end{tcbitemize}
\tcbitem This is a flexible height box.
\tcbitem \lipsum[4]
\tcbitem[blankest,space to=\myspace]
\begin{tcbitemize}[raster columns=1]
\tcbitem One
\tcbitem[add to natural height=\myspace]
This box will adapt its height.
\end{tcbitemize}
\end{tcbitemize}

```

One

This is a flexible height box.

This box will adapt its height.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

One

This box will adapt its height.

```

\begin{tcbitemize}[raster equal height=rows,
raster every box/.style={colframe=red!50!black,colback=red!10!white}]
\tcbitem[blankest,space to=\myspace]
\begin{tcbitemize}[raster columns=1]
\tcbitem One
\tcbitem[add to natural height=\myspace]
This box will adapt its height.
\tcbitem \lipsum[4]
\end{tcbitemize}
\tcbitem[blankest,space to=\myspace]
\begin{tcbitemize}[raster columns=1]
\tcbitem[blankest]\includegraphics[width=\linewidth]{goldshade.png}
\tcbitem[add to natural height=\myspace]
This box will adapt its height.
\end{tcbitemize}
\end{tcbitemize}

```

One

This box will adapt its height.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.



This box will adapt its height.

## 17 Libraries `\lib{listings}`, `\lib{listingsutf8}`, and `\lib{minted}`

### 17.1 Loading the Libraries

In contrast to other `tcolorbox`<sup>P. 12</sup> libraries, the libraries `\lib{listings}`, `\lib{listingsutf8}`, and `\lib{minted}` are concurrent in the sense that they all do the same thing, i.e. displaying listings with or without typesetting the listing in L<sup>A</sup>T<sub>E</sub>X parallel. The difference is the underlying L<sup>A</sup>T<sub>E</sub>X package which does the core job for displaying a listing. So, typically, you need just *one* of these libraries. If you do not have a clue which one of them you should use and you are using `pdflatex`, you should take `\lib{listingsutf8}`. If you are using `xelatex` or `lualatex`, you should take `\lib{listings}` as `xelatex` and `lualatex` are not compatible with `\lib{listingsutf8}`.

! The order in which the libraries are included influences the default settings and the `/tcb/reset`<sup>P. 123</sup> behavior. The settings of a later loaded library overwrite the settings of a previous loaded library. A library is never loaded twice.

#### 17.1.1 Loading `\lib{listings}`

This library uses the package `listings`<sup>CTAN</sup> [6] to typeset listings. It is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{listings}
```

This also loads the package `listings`<sup>CTAN</sup> [6].

The `/tcb/listing engine`<sup>P. 348</sup> is set to `listings` by the library. To reactivate this setting, if overwritten by other libraries, use

```
\tcbset{listing engine=listings}
```

#### 17.1.2 Loading `\lib{listingsutf8}`

! This library is not needed (and troublesome) when using XeL<sup>A</sup>T<sub>E</sub>X or LuaL<sup>A</sup>T<sub>E</sub>X. Therefore, loading this library is automatically replaced by loading `\lib{listings}` only, if `pdfLATEX` is *not* used.

To extend `listings` for UTF-8 encoded sources, you can use the support from the package `listingsutf8`<sup>CTAN</sup> [10] by loading the library variant `\lib{listingsutf8}`.

```
\tcbuselibrary{listingsutf8}
\tcbset{listing utf8=latin1}% optional; 'latin1' is the default.
```

This also loads the library `\lib{listings}` and the packages `listings`<sup>CTAN</sup> [6] and `listingsutf8`<sup>CTAN</sup> [10].

The `/tcb/listing engine`<sup>P. 348</sup> is set to `listings` by the library. To reactivate this setting, if overwritten by other libraries, use

```
\tcbset{listing engine=listings}
```

### 17.1.3 Loading minted

This library uses the package `minted`<sup>→ CTAN</sup> [13] to typeset listings. It is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{minted}
```

This also loads the package `minted`<sup>→ CTAN</sup> [13].

To use the legacy version v2.9 of `minted`<sup>→ CTAN</sup>, write



```
\usepackage{minted2}
```

before loading the library!



The `minted`<sup>→ CTAN</sup> package uses the external tool `Pygments` [15] to apply syntax highlighting.

It has to be installed and set up, before the library can be used, see [13] and [15]. The `tcolorbox`<sup>→ P. 12</sup> library  minted does not work, if the package `minted`<sup>→ CTAN</sup> [13] does not work.

The `/tcb/listing engine`<sup>→ P. 348</sup> is set to `minted` by the library. To reactivate this setting, if overwritten by other libraries, use

```
\tcbset{listing engine=minted}
```

## 17.2 Common Macros of the Libraries

```
\begin{tcblisting}{\langle options \rangle}
  \langle environment content \rangle
\end{tcblisting}
```

Creates a colored box based on a `tcolorbox`<sup>→ P. 12</sup>. Controlled by the given `\langle options \rangle`, the environment content is typeset normally and/or as a listing. Furthermore, the `\langle options \rangle` control appearance and functions of the `tcolorbox`<sup>→ P. 12</sup>. By default, the listing is interpreted as a L<sup>A</sup>T<sub>E</sub>X listing.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black]
  This is a \LaTeX\ example which displays the text as source code
  and in compiled form.
\end{tcblisting}
```

This is a \LaTeX\ example which displays the text as source code  
and in compiled form.

This is a L<sup>A</sup>T<sub>E</sub>X example which displays the text as source code and in compiled form.

```
% \tcbuselibrary{listings} /or/ \tcbuselibrary{listingsutf8}
\begin{tcblisting}[colback=yellow!5,colframe=yellow!50!black,listing only,
title=This is source code in another language (XML), fonttitle=\bfseries,
listing options={language=XML,columns=fullflexible,keywordstyle=\color{red}}]
<?xml version="1.0"?>
<project name="Package tcolorbox" default="documentation" basedir=".">
<description>
Apache Ant build file (http://ant.apache.org/)
</description>
</project>
\end{tcblisting}
```

This is source code in another language (XML)

```
<?xml version="1.0"?>
<project name="Package tcolorbox" default="documentation" basedir=".">
<description>
Apache Ant build file (http://ant.apache.org/)
</description>
</project>
```

```
% \tcbuselibrary{minted}
\begin{tcblisting}[colback=yellow!5,colframe=yellow!50!black,listing only,
title=This is source code in another language (XML), fonttitle=\bfseries,
listing engine=minted,minted language=xml]
<?xml version="1.0"?>
<project name="Package tcolorbox" default="documentation" basedir=".">
<description>
Apache Ant build file (http://ant.apache.org/)
</description>
</project>
\end{tcblisting}
```

This is source code in another language (XML)

```
<?xml version="1.0"?>
<project name="Package tcolorbox" default="documentation" basedir=".">
<description>
Apache Ant build file (http://ant.apache.org/)
</description>
</project>
```

```
% This box is as wide as needed (listing only !)
% \tcbuselibrary{skins}
\begin{tcblisting}[colback=green!5!white,colframe=green!50!black,listing only,
hbox,enhanced,drop fuzzy shadow,before=\begin{center},after=\end{center}]
\begin{tikzpicture}
\fill[red] (0,0) rectangle (1,1);
\end{tikzpicture}
\end{tcblisting}
```

```
\begin{tikzpicture}
\fill[red] (0,0) rectangle (1,1);
\end{tikzpicture}
```

```
\begin{tcboutputlisting}
  <environment content>
\end{tcboutputlisting}
```

Saves the environment content to a file which is named by the key value of `/tcb/listing file`<sup>→ P. 348</sup>. Later, this file can be loaded by `\tcbinputlisting` or `\tcbuselistingtext` or `\tcbuselistinglisting`.

```
\begin{tcboutputlisting}
  This \textbf{text} is written to a standardized file for later usage.
\end{tcboutputlisting}
```

`\tcbinputlisting{<options>}`

Creates a colored boxed based on a `tcolorbox`<sup>→ P. 12</sup>. The text content is read from a file named by the key value of `/tcb/listing file`<sup>→ P. 348</sup>. Apart from that, the function is equal to that of `tcblisting`<sup>→ P. 334</sup>.

```
\tcbinputlisting{colback=red!5!white,colframe=red!75!black,text only}
\tcbinputlisting{colback=green!5,colframe=green!75!black,listing only}
```



```
\begin{tikzpicture}
  \fill[red] (0,0) rectangle (1,1);
\end{tikzpicture}
```

`\tcbuselistingtext`

Loads text from a file named by the key value of `/tcb/listing file`<sup>→ P. 348</sup>.

```
\tcbuselistingtext
```



`\tcbuselistinglisting`

Typesets text as listing from a file named by the key value of `/tcb/listing file`<sup>→ P. 348</sup>.

```
\tcbuselistinglisting
```

```
\begin{tikzpicture}
  \fill[red] (0,0) rectangle (1,1);
\end{tikzpicture}
```

`\tcbusetemplisting`

Typesets text as listing from a temporary file which was written by `tcbwritetemp`<sup>→ P. 148</sup>.

### 17.3 Producing `tcblisting` Environments

! If a new sort of `tcblisting`<sup>→ P. 334</sup> environments should be created with one optional argument only, one is highly recommended to use `\DeclareTCBListing`<sup>→ P. 339</sup> or `\NewTCBListing`<sup>→ P. 339</sup> instead of `\newtcblisting` to avoid content scanning problems.

`\newtcblisting[<init options>]{<name>}{<number>} [<default>]{<options>}`

Creates a new environment `<name>` based on `tcblisting`<sup>→ P. 334</sup>. Basically, `\newtcblisting` operates like `\newenvironment`. This means, the new environment `<name>` optionally takes `<number>` arguments, where `<default>` is the default value for the optional first argument. The `<options>` are given to the underlying `tcblisting`<sup>→ P. 334</sup>. Note that `/tcb/savedelimiter`<sup>→ P. 33</sup> is set to the given `<name>` automatically. The `<init options>` allow setting up automatic numbering, see Section 5 from page 128.

```
\newtcblisting{mybox}[%  
    colback=red!5!white,  
    colframe=red!75!black}  
  
\begin{mybox}  
This is my \LaTeX\ box.  
\end{mybox}
```

This is my \LaTeX\ box.

This is my LATEX box.

```
\newtcblisting{mybox}[1]{%  
    colback=red!5!white,  
    colframe=red!75!black,  
    fonttitle=\bfseries,  
    title={#1}}  
  
\begin{mybox}{Listing Box}  
This is my \LaTeX\ box.  
\end{mybox}
```

**Listing Box**

This is my \LaTeX\ box.

This is my LATEX box.

```
\newtcblisting{mybox}[2][]{%  
    colback=red!5!white,  
    colframe=red!75!black,  
    fonttitle=\bfseries,  
    title={#2},#1}  
  
\begin{mybox}[listing only]  
    {Listing Box}  
This is my \LaTeX\ box.  
\end{mybox}  
\bigskip  
  
\begin{mybox}[listing side text]  
    {Listing Box}  
This is my  
\LaTeX\ box.  
\end{mybox}
```

**Listing Box**

This is my \LaTeX\ box.

**Listing Box**

This is my  
\LaTeX\ box.

This is my  
LATEX box.

*Definition in the preamble:*

```
\newtcblisting[auto counter]{mybox}[1]{%
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    title=Listing \thetcbcounter: #1}
```

```
\begin{mybox}{Listing Box}
This is my \LaTeX\ box.
\end{mybox}
```

### Listing 1: Listing Box

This is my \LaTeX\ box.

This is my L<sup>A</sup>T<sub>E</sub>X box.

**\renewtcblisting** [*<init options>*] {*<name>*} [*<number>*] [*<default>*] {*<options>*}

Operates like `\newtcblisting`<sup>P.337</sup>, but based on `\ renewenvironment` instead of `\newenvironment`. An existing environment is redefined.

### \NewTCBListing[*init options*]{*name*}{*specification*}{*options*}

Creates a new environment *name* based on `tcblisting`<sup>P.334</sup>.

Basically, `\NewTCBListing` operates like `\NewDocumentEnvironment`. This means, the new environment *name* is constructed with the given L<sup>A</sup>T<sub>E</sub>X3 argument *specification* following [25]. An error is issued if *name* has already been defined. The *options* are given to the underlying `tcblisting`<sup>P.334</sup>.

Note that `/tcb/savedelimiter`<sup>P.33</sup> is set to the given *name* automatically.

The *init options* allow setting up automatic numbering, see Section 5 from page 128.

```
\NewTCBListing{mybox}{ s 0{} m }{%
    colback=red!5!white,
    colframe=red!75!black,
    fonttitle=\bfseries,
    IfBooleanTF={#1}
        {listing side text}
        {text side listing},
    title={#3},#2}

\begin{mybox}{Listing Box}
This is my
\TeX\ box.
\end{mybox}
\bigskip

\begin{mybox}*{Listing Box}
This is my
\TeX\ box.
\end{mybox}
\bigskip

\begin{mybox}[colback=yellow]
[listing Box]
This is my
\TeX\ box.
\end{mybox}
```

#### Listing Box

This is my  
\TeX box.

This is my  
\TeX\ box.

#### Listing Box

This is my  
\TeX\ box.

This is my  
\TeX box.

#### Listing Box

This is my  
\TeX box.

This is my  
\TeX\ box.

### \RenewTCBListing[*init options*]{*name*}{*specification*}{*options*}

Operates like `\NewTCBListing`, but based on `\RenewDocumentEnvironment` instead of `\NewDocumentEnvironment`. An existing environment is redefined.

### \ProvideTCBListing[*init options*]{*name*}{*specification*}{*options*}

Operates like `\NewTCBListing`, but based on `\ProvideDocumentEnvironment` instead of `\NewDocumentEnvironment`. The environment *name* is only created if it is not already defined.

### \DeclareTCBListing[*init options*]{*name*}{*specification*}{*options*}

Operates like `\NewTCBListing`, but based on `\DeclareDocumentEnvironment` instead of `\NewDocumentEnvironment`. The new environment is always created, irrespective of an already existing environment with the same name.

With date of 2018-05-12, the `xparse`<sup>→ CTAN [14]</sup> package changed the argument collection process (now part of the L<sup>A</sup>T<sub>E</sub>X kernel). Spaces are ignored which leads to a serious change for listing environments ending with an optional argument like `\{0\}`. The former behavior of respecting spaces can be preserved by adding a «!». Note that the following code uses `\{!0\}` now.

- For older `xparse` versions, the following code is correct when using `\{0\}`.
- For `xparse` of 2018-05-12, only the first two examples of the following code using `\{0\}` are really «good» – all others do not work.
- For `xparse` of 2018-05-12 and later, the following code is correct when using `\{!0\}`.

## Caveats of using an environment ending with an optional argument

```
\DeclareTCBListing{mybox}{ !O{} }{listing only,#1}

\begin{mybox}[colframe=red]
\good
\end{mybox}

\begin{mybox}[colframe=red]\good\end{mybox}

\begin{mybox}
\good
\end{mybox}

\begin{mybox} \good\end{mybox}

\begin{mybox}\bad!\end{mybox}

\begin{mybox}
[\good]
\end{mybox}

\begin{mybox} [\good]\end{mybox}

\begin{mybox} [\bad!]\end{mybox}
```

## 17.4 Producing \tcbinputlisting Commands

\newtcbinputlisting[*init options*]{\*name*} [*number*] [*default*] {*options*}

Creates a new macro \*name* based on \tcbinputlisting<sup>→ P. 336</sup>. Basically, \newtcbinputlisting operates like \newcommand. The new macro \*name* optionally takes *number* arguments, where *default* is the default value for the optional first argument. The *options* are given to the underlying \tcbinputlisting<sup>→ P. 336</sup>. The *init options* allow setting up automatic numbering, see Section 5 from page 128.

```
\newtcbinputlisting[use counter from=mycbox]{\mylisting}[2][]{%
    listing file={#2},
    title=Listing (\thetcbcounter) of \texttt{#2},
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    listing only,breakable,#1}

\mylisting[before upper=\textit{This is the included file content:}]
{\jobname.tcbtemp}
```

### Listing (2) of tcbtemp

*This is the included file content:*

```
\newtcbinputlisting[use counter from=mycbox]{\mylisting}[2][]{%
    listing file={#2},
    title=Listing (\thetcbcounter) of \texttt{#2},
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    listing only,breakable,#1}

\mylisting[before upper=\textit{This is the included file content:}]
{\jobname.tcbtemp}
```

```
\newtcbinputlisting[use counter from=mycbox]{\mylisting}[2][]{%
    listing engine=minted,minted language=latex,minted style=colorful,
    listing file={#2},
    title=Listing (\thetcbcounter) of \texttt{#2},
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    listing only,breakable,#1}

\mylisting[before upper=\textit{This is the included file content:}]
{\jobname.tcbtemp}
```

### Listing (3) of tcbtemp

*This is the included file content:*

```
\newtcbinputlisting[use counter from=mycbox]{\mylisting}[2][]{%
    listing engine=minted,minted language=latex,minted style=colorful,
    listing file={#2},
    title=Listing (\thetcbcounter) of \texttt{#2},
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    listing only,breakable,#1}

\mylisting[before upper=\textit{This is the included file content:}]
{\jobname.tcbtemp}
```

\renewtcbinputlisting[*init options*]{\*name*} [*number*] [*default*] {*options*}

Operates like \newtcbinputlisting, but based on \renewcommand instead of \newcommand. An existing macro is redefined.

## \NewTCBInputListing[*init options*]{\<name>}{*specification*}{*options*}

Creates a new command  $\backslash\langle name\rangle$  based on  $\backslash\tcbinputlisting$ <sup>P. 336</sup>. Basically,  $\backslash$ NewTCBInputListing operates like  $\backslash$ NewDocumentCommand. This means, the new command  $\backslash\langle name\rangle$  is constructed with the given LATEX3 argument *specification* following [25]. An error is issued if  $\backslash\langle name\rangle$  has already been defined. The *options* are given to the underlying  $\backslash\tcbinputlisting$ <sup>P. 336</sup>.

The *init options* allow setting up automatic numbering, see Section 5 from page 128.

```
% counter from previous example
\NewTCBInputListing[use counter from=pabox]{\mylisting}{ 0{} 0{red} m }{%
    listing file={#3},title=Listing-\thetcbcounter,
    colback=#2!5!white,colframe=#2!50!black,colbacktitle=#2!75!black,
    fonttitle=\bfseries,listing only,#1}

\mylisting[before upper=\textit{This is the included file content:}]
[blue]{\jobname.tcbtemp}
```

### Listing 17.1

*This is the included file content:*

```
% counter from previous example
\NewTCBInputListing[use counter from=pabox]{\mylisting}{ 0{} 0{red} m }{%
    listing file={#3},title=Listing-\thetcbcounter,
    colback=#2!5!white,colframe=#2!50!black,colbacktitle=#2!75!black,
    fonttitle=\bfseries,listing only,#1

\mylisting[before upper=\textit{This is the included file content:}]
[blue]{\jobname.tcbtemp}
```

## \RenewTCBInputListing[*init options*]{\<name>}{*specification*}{*options*}

Operates like  $\backslash$ NewTCBInputListing, but based on  $\backslash$ RenewDocumentCommand instead of  $\backslash$ NewDocumentCommand. An existing command is redefined.

## \ProvideTCBInputListing[*init options*]{\<name>}{*specification*}{*options*}

Operates like  $\backslash$ NewTCBInputListing, but based on  $\backslash$ ProvideDocumentCommand instead of  $\backslash$ NewDocumentCommand. The command  $\backslash\langle name\rangle$  is only created if it is not already defined.

## \DeclareTCBInputListing[*init options*]{\<name>}{*specification*}{*options*}

Operates like  $\backslash$ NewTCBInputListing, but based on  $\backslash$ DeclareDocumentCommand instead of  $\backslash$ NewDocumentCommand. The new command is always created, irrespective of an already existing command with the same name.

## 17.5 Option Keys of the `listings` Library

`/tcb/listing options=<key list>` (no default, initially `style=tcblatex`)

Sets the options from the package `listings`<sup>→ CTAN [6]</sup> which are used during typesetting of the listing. For L<sup>A</sup>T<sub>E</sub>X listings, there is a predefined `listings` style named `tcblatex` which can be used.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!25,left=6mm,
listing options={style=tcblatex,numbers=left,numberstyle=\tiny\color{red!75!black}}]
This is a \LaTeX\ example which displays the text as source code
and in compiled form. Additionally, we use line numbers here.
\end{tcblisting}
```

1 This is a \LaTeX\ example which displays the text as source code  
2 and in compiled form. Additionally, we use line numbers here.

This is a L<sup>A</sup>T<sub>E</sub>X example which displays the text as source code and in compiled form.  
Additionally, we use line numbers here.

`/tcb/no listing options` (no value, initially unset)

Abbreviation for `listing options={}`. This removes all options for the `listings`<sup>→ CTAN</sup> package. This includes the `tcblisting`<sup>→ P. 334</sup> standard style `tcblatex` and the encoding presets. Use this option, if you want to set the `listings` options outside of `tcblisting`<sup>→ P. 334</sup>, e.g. globally in the preamble.

```
\begin{tcblisting}[no listing options]
All \textit{listings} options removed.
\end{tcblisting}
```

All `\textit{listings}` options removed.

All `listings` options removed.

`/tcb/listing style=<style>` (no default, initially `tcblatex`)

Abbreviation for `listing options={style=...}`. This key sets a `<style>` for the `listings`<sup>→ CTAN</sup> package, see [6]. For L<sup>A</sup>T<sub>E</sub>X, there is a predefined style named `tcblatex`.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,
listing style=tcblatex]
Here, we use the predefined style.
\end{tcblisting}
```

Here, we use the predefined style.

Here, we use the predefined style.

`/tcb/listing inputencoding=<encoding>` (no default, initially `\inputencodingname`)

Sets the input encoding value for the predefined listing style `tcblatex` and `tcbdocumentation` from the library [documentation](#). The initial value is derived from the package `inputenc`<sup>→ CTAN</sup> if used.

`/tcb/listing remove caption=true|false` (default `true`, initially `true`)

If set to `true`, some part of the caption building code of the `listings`<sup>→ CTAN</sup> package is silenced to prevent some unwanted interaction with the `hyperref`<sup>→ CTAN</sup> package resulting in additional vertical space. If set to `false`, the `listings`<sup>→ CTAN</sup> package code is kept unchanged. Note that listings outside `tcblisting`<sup>→ P. 334</sup> and `\tcbinputlisting`<sup>→ P. 336</sup> are always processed normally. Typically, a user is not expected to use this key at all.

`/tcb/every listing line=<text>` (no default, initially unset/empty)

Inserts some `<text>` to the begin of every line of a listing. Note that this is a hack of the `listings`<sup>→ CTAN</sup> package code. This may become unusable or superfluous in the future.

```
\newtcblisting{commandshell}{colback=black,colupper=white,colframe=yellow!75!black,
listing only,listing options={style=tcblatex,language=sh},
every listing line={\textcolor{red}{\small\ttfamily\bfseries root \$> }}}}

\begin{commandshell}
ls -al
cd /usr/lib
\end{commandshell}
```

`root $> ls -al  
root $> cd /usr/lib`

`/tcb/every listing line*=<text>` (no default, initially unset/empty)

Identical to `/tcb/every listing line` plus additional enlargement of `/tcb/rightupper`<sup>→ P. 48</sup> by the width of `<text>`. Therefore, this option has to be used after the geometry settings are done. This option is intended to be used in conjunction with `/tcb/hbox`<sup>→ P. 109</sup>.

```
\newtcblisting{commandshell}{colback=black,colupper=white,colframe=yellow!75!black,
listing only,listing options={style=tcblatex,language=sh},hbox,
every listing line*={\textcolor{red}{\small\ttfamily\bfseries root \$> }}}}

\begin{commandshell}
ls -al
cd /usr/lib
\end{commandshell}
```

`root $> ls -al  
root $> cd /usr/lib`

See further options in 17.8 on page 348.

! For an combined example of using `\lstinline` inside a `tcolorbox`<sup>→ P. 12</sup>, see `\DeclareTotalTCBox`<sup>→ P. 23</sup>.

## 17.6 Option Keys of the `\listingsutf8` Library

! The `\listingsutf8` library is not needed (and troublesome) when using Xe<sup>L</sup>A<sub>T</sub>E<sub>X</sub> or Lua<sup>L</sup>A<sub>T</sub>E<sub>X</sub>. Therefore, loading this library is automatically replaced by loading `\listings` only, if pdf<sup>L</sup>A<sub>T</sub>E<sub>X</sub> is *not* used.

The `\listingsutf8` library is an extension of the `\listings` library, so all options from 17.5 on page 343 are applicable.

`/tcb/listing utf8=(one-byte-encoding)` (style, no default, initially `latin1`)

Abbreviation for using `/tcb/listing inputencoding`<sup>→ P. 344</sup> together with UTF-8 support from the package `listingsutf8`<sup>→ CTAN</sup> [10]. This option is available only for the library variant `\listingsutf8`. The `(one-byte-encoding)` is one of the applicable encodings from [10], e.g. `latin1` which is the default.

Be aware that this means restriction to this specific `(one-byte-encoding)`: e.g. `latin1` comprises umlauts and other accented characters, but not the Euro sign. If you want to use the `listings`<sup>→ CTAN</sup> package and «real» UTF-8 source code, then do *not* use `\listingsutf8` but `\listings` with `/tcb/listing inputencoding`<sup>→ P. 344</sup>=`utf8` and with specific manual hacks for specific UTF-8-encoded characters.

See further options in 17.8 on page 348.

## 17.7 Option Keys of the minted Library

`/tcb/minted language=<programming language>` (no default, initially `latex`)

Sets a `<programming language>` known to Pygments [15].

```
\begin{tcblisting}[listing engine=minted,minted style=trac,
minted language=java,
colback=red!5!white,colframe=red!75!black,listing only]
public class HelloWorld {
    // A `Hello World' in Java
    public static void main(String[] args) {
        System.out.println("Hello World!");
    }
}
\end{tcblisting}
```

```
public class HelloWorld {
    // A `Hello World' in Java
    public static void main(String[] args) {
        System.out.println("Hello World!");
    }
}
```

U 2021-12-15 `/tcb/minted options=<key list>` (no default, initially see `/tcb/default minted options`<sup>P. 347</sup>)

Sets the options from the package `minted`<sup>→ CTAN</sup> [13] which are used during typesetting of the listing. Also see `/tcb/minted options app`<sup>P. 483</sup> and `/tcb/minted options pre`<sup>P. 483</sup>.

```
% \tcbuselibrary{skins}
\newtcblisting{myjava}[listing engine=minted,
minted style=colorful,
minted language=java,
minted options={fontsize=\small,breaklines,autogobble,linenos,numbersep=3mm},
colback=blue!5!white,colframe=blue!75!black,listing only,
left=5mm,enhanced,
overlay={\begin{tcbclipinterior}\fill[red!20!blue!20!white] (frame.south west)
rectangle ([xshift=5mm]frame.north west);\end{tcbclipinterior}}}

\begin{myjava}
public class HelloWorld {
    // A `Hello World' in Java
    public static void main(String[] args) {
        System.out.println("Hello World!");
    }
}
\end{myjava}
```

```
1  public class HelloWorld {
2      // A `Hello World' in Java
3      public static void main(String[] args) {
4          System.out.println("Hello World!");
5      }
6  }
```

N 2021-12-15

`/tcb/default minted options=<key list>` (no default, initially `tabsize=2, fontsize=\small, breaklines, autogobble`)

Sets the options from the package `minted`<sup>→ CTAN</sup> [13] which are used during typesetting of the listing, if `/tcb/minted options`<sup>→ P. 346</sup> are *not* used. The intended use is inside the preamble to change the default behavior. Note that setting `/tcb/default minted options` also resets `/tcb/minted options`<sup>→ P. 346</sup>. Since `minted` [13] v2.6 set `stripnl=false`, adding `stripnl` could be helpful to remove leading and trailing blank lines.

```
% inside the preamble
\tcbset{%
  default minted options={tabsize=4,fontsize=\normalsize},
}
```

U 2024-11-07

`/tcb/minted style=<style>` (no default, initially unset)

Sets a `<style>` known to Pygments [15], see <https://pygments.org/styles/>. Alternatively, one could add `style=<style>` to `/tcb/minted options`<sup>→ P. 346</sup>. Note that setting `\usemintedstyle{<style>}` only once per document is more economic, if all styles in a document are the same. For examples of different styles, see `/tcb/minted language`<sup>→ P. 346</sup> and `/tcb/minted options`<sup>→ P. 346</sup>.

! Up to version 6.4.1, `/tcb/minted style` applied `\usemintedstyle{<style>}` resulting in a global style change, even for code using `minted`<sup>→ CTAN</sup> directly. Now, `/tcb/minted style` only applies to `tcolorbox`.

See further options in 17.8 on the following page.

## 17.8 Common Option Keys of all Libraries

For the  $\langle options \rangle$  in `tcblisting`<sup>→ P. 334</sup> respectively `\tcbinputlisting`<sup>→ P. 336</sup> the following pgf keys can be applied. The key tree path `/tcb/` is not to be used inside these macros.

**/tcb/listing engine=(*engine*)** (no default)

Sets the  $\langle engine \rangle$  which typesets the listings. Feasible values are

- `listings`, if library `\usepackage{listings}` or `\usepackage{listingsutf8}` is loaded.
- `minted`, if library `\usepackage{minted}` is loaded.

**/tcb/listing file=(*file name*)** (no default, initially `\jobname.listing`)

Sets the  $\langle file\ name \rangle$  of the file which is used to save listings.

**/tcb/listing and text** (no value, initially set)

Typesets the environment content as listing in the upper part and as compiled text in the lower part.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing and text]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

This is a L<sup>A</sup>T<sub>E</sub>X example.

**/tcb/text and listing** (no value)

Typesets the environment content as compiled text in the upper part and as listing in the lower part.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,text and listing]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a L<sup>A</sup>T<sub>E</sub>X example.

This is a \LaTeX\ example.

**/tcb/listing only** (no value)

Typesets the environment content as listing.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing only]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

### /tcb/text only

(no value)

Typesets the environment content as compiled text.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,text only]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a L<sup>A</sup>T<sub>E</sub>X example.

### /tcb/comment=<text>

(no default, initially empty)

Records a comment with <text> as content. The comment is displayed e.g. in conjunction with /tcb/listing and comment<sup>→ P. 352</sup> and /tcb/comment and listing<sup>→ P. 352</sup>.

```
\begin{tcblisting}[comment={This comment is really only a comment},
  colback=red!5!white,colframe=red!75!black]
This is a \textbf{tcolorbox}.
\end{tcblisting}
```

This is a \textbf{tcolorbox}.

This is a tcolorbox.

N 2014-11-17

### /tcb/comment only

(no value)

Typesets the environment content with the comment text.

```
\begin{tcblisting}[comment only,
  comment={This is a comment.},
  colback=red!5!white,colframe=red!75!black]
This is a \textbf{tcolorbox}.
\end{tcblisting}
```

This is a comment.

### /tcb/image comment=<(options)>{<filename>}

(style, no default, initially unset)

Uses an image denoted by <filename> as comment for the listing. The image is included by the standard \includegraphics macro with given <options>.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing side comment,
  image comment={width=2.5cm}{example-image-a.pdf},center lower]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.




Uses an image denoted by <filename> as *comment* for the listing. The image is included by the \tcbincludegraphics<sup>→ P. 283</sup> macro. The inclusion can be customized by /tcb/comment style<sup>→ P. 352</sup>.



The library LIB skins is needed to apply this option.

```
% \tcbuselibrary{skins}
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing side comment,
righthand width=3cm,lower separated=false,
tcbimage comment={example-image-a.pdf},
comment style={size=fbox,colframe=blue,colback=blue!50,sharp corners,
drop fuzzy shadow}]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.




Uses a PDF file denoted by `<filename>` as *comment* for the listing. The image is included by `\tcbincludepdf`<sup>P. 285</sup> inside a `tcbraster`<sup>P. 313</sup>. The inclusion can be customized by `/tcb/comment style`<sup>P. 352</sup>.

**!** The libraries `LIB skins` and `LIB raster` are needed to apply this option.

```
% \tcbuselibrary{skins,raster}
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing and comment,
righthand width=3cm,lower separated=false,middle=1mm,
pdf comment={tcolorbox-example.pdf},
comment style={raster columns=3,graphics pages={1,2,3},
colframe=blue,drop fuzzy shadow}]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

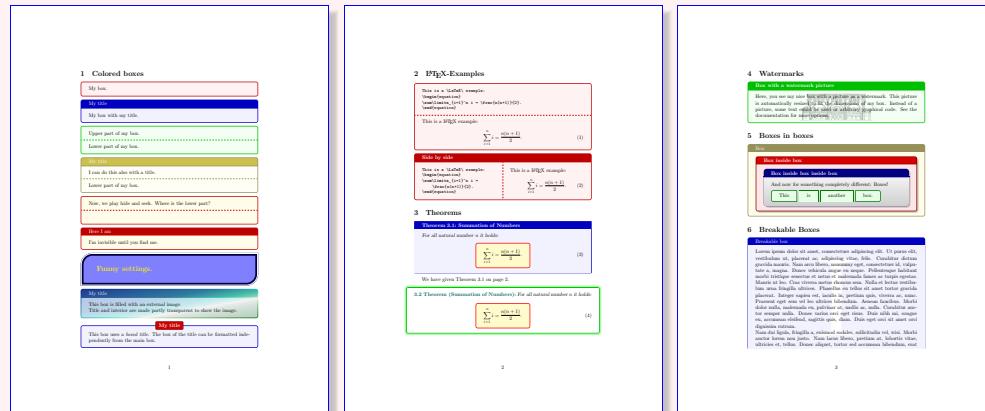

N 2014-11-14

**/tcb/pdf extension=<extension>** (no default, initially pdf)

Sets the PDF file name extension for `/tcb/pdf comment→ P. 351` to `<extension>`. Note that `<extension>` always overwrites any actual extension given inside `/tcb/pdf comment→ P. 351`.

N 2014-11-14

**/tcb/comment style=<options>** (no default, initially empty)

Sets the `<options>` for `/tcb/tcbimage comment→ P. 350` and `/tcb/pdf comment→ P. 351`. These are `tcolorbox→ P. 12` options to customize the colored box drawn around the image(s), also image options encapsulated by `/tcb/graphics options→ P. 286`, and `tcbraster→ P. 313` options for `/tcb/pdf comment→ P. 351`.

**/tcb/listing and comment** (no value)

Typesets the environment content as listing in the upper part and a given comment in the lower part.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing and comment,
comment={This is my comment. It may contain line breaks.\par
It can even use the environment content
\flqq\ignorespaces\tcbuselistingtext\unskip\frqq}]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a `\LaTeX\ example`.

This is my comment. It may contain line breaks.  
It can even use the environment content «This is a `\LaTeX` example.»

**/tcb/comment and listing** (no value)

Typesets a given comment in the upper part and the environment content as listing in the lower part.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,comment and listing,
comment={This is my comment.}]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is my comment.

This is a `\LaTeX\ example`.

### /tcb/listing side text

(style, no value)

Typesets the environment content side by side as listing in the left (upper) part and as compiled text in the right (lower) part. This is a shortcut for setting /tcb/listing and text<sup>→ P. 348</sup> and /tcb/sidebyside<sup>→ P. 138</sup>.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing side text]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

This is a L<sup>A</sup>T<sub>E</sub>X example.

! Note that sidebyside=false has to be added, if the setting of /tcb/listing side text is to be annihilated.

### /tcb/text side listing

(style, no value)

Typesets the environment content side by side as compiled text in the left (upper) part and as listing in the right (lower) part. This is a shortcut for setting /tcb/text and listing<sup>→ P. 348</sup> and /tcb/sidebyside<sup>→ P. 138</sup>.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,text side listing]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a L<sup>A</sup>T<sub>E</sub>X example.

This is a \LaTeX\ example.

### /tcb/listing outside text

(no value)

Typesets the environment content side by side as listing in a tcolorbox<sup>→ P. 12</sup> and as compiled text outside the box in the right part of the page. Nevertheless, the outside text is treated as *lower* part of the tcolorbox<sup>→ P. 12</sup> and can be formatted with all lower part options. The space partitioning is done with the side by side options from Section 6 on page 138.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing outside text]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

This is a L<sup>A</sup>T<sub>E</sub>X example.

### /tcb/text outside listing

(no value)

Typesets the environment content side by side as listing in a `tcolorbox`<sup>→ P. 12</sup> and as compiled text outside the box in the left part of the page. Nevertheless, the outside text is treated as *lower* part of the `tcolorbox`<sup>→ P. 12</sup> and can be formatted with all lower part options. The space partitioning is done with the side by side options from Section 6 on page 138.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,text outside listing]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a L<sup>A</sup>T<sub>E</sub>X example.

This is a \LaTeX\ example.

### /tcb/listing side comment

(style, no value)

Typesets the environment content side by side as listing in the left (upper) part and a given comment in the right (lower) part. This is a shortcut for setting `/tcb/listing` and `comment`<sup>→ P. 352</sup> and `/tcb/sidebyside`<sup>→ P. 138</sup>.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing side comment,
righthand width=1.5cm,image comment={width=1.5cm}{example-image-a.pdf}]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.



### /tcb/comment side listing

(style, no value)

Typesets the environment content side by side with a given comment in the left (upper) part and as listing in the right (lower) part. This is a shortcut for setting `/tcb/comment` and `listing`<sup>→ P. 352</sup> and `/tcb/sidebyside`<sup>→ P. 138</sup>.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,comment side listing,
lefthand width=1.5cm,image comment={width=1.5cm}{example-image-a.pdf}]
This is a \LaTeX\ example.
\end{tcblisting}
```



This is a \LaTeX\ example.

### /tcb/listing outside comment

(no value)

Typesets the environment content side by side as listing in a `tcolorbox`<sup>→ P. 12</sup> and a given comment outside the box in the right part of the page. Nevertheless, the outside text is treated as *lower* part of the `tcolorbox`<sup>→ P. 12</sup> and can be formatted with all lower part options. The space partitioning is done with the side by side options from Section 6 on page 138.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing outside comment,
    righthand width=1.5cm,image comment={width=1.5cm}{example-image-a.pdf}]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.



### /tcb/comment outside listing

(no value)

Typesets the environment content side by side as listing in a `tcolorbox`<sup>→ P. 12</sup> and a given comment outside the box in the left part of the page. Nevertheless, the outside text is treated as *lower* part of the `tcolorbox`<sup>→ P. 12</sup> and can be formatted with all lower part options. The space partitioning is done with the side by side options from Section 6 on page 138.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,comment outside listing,
    lefthand width=1.5cm,image comment={width=1.5cm}{example-image-a.pdf}]
This is a \LaTeX\ example.
\end{tcblisting}
```



This is a \LaTeX\ example.

### /tcb/listing above text

(no value)

Typesets the environment content as listing in a `tcolorbox`<sup>→ P. 12</sup> and as compiled text outside and below the box. The outside text is treated as *lower* part of the `tcolorbox`<sup>→ P. 12</sup> and can be formatted with all lower part options. The distance between box and text is controlled by `/tcb/middle`<sup>→ P. 50</sup>.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing above text]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.

This is a \LaTeX\ example.

### /tcb/listing above\* text

(no value)

Widely equal to `/tcb/listing above text`, but the outside text is not formatted with the lower part options. Also, it is not put into a minipage and it may span several pages. The distance between box and text is controlled by `/tcb/after`<sup>→ P. 90</sup>.

### /tcb/text above listing

(no value)

Typesets the environment content as listing in a `tcolorbox`<sup>→ P. 12</sup> and as compiled text outside and above the box. The outside text is treated as *lower* part of the `tcolorbox`<sup>→ P. 12</sup> and can be formatted with all lower part options. The distance between box and text is controlled by `/tcb/middle`<sup>→ P. 50</sup>.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,text above listing]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a L<sup>A</sup>T<sub>E</sub>X example.

This is a \LaTeX\ example.

### N 2014-11-07 /tcb/text above\* listing

(no value)

Widely equal to `/tcb/text above listing`, but the outside text is not formatted with the lower part options. Also, it is not put into a minipage and it may span several pages. The distance between box and text is controlled by `/tcb/before`<sup>→ P. 90</sup>.

### /tcb/listing above comment

(no value)

Typesets the environment content as listing in a `tcolorbox`<sup>→ P. 12</sup> and a given comment outside and below the box. The outside text is treated as *lower* part of the `tcolorbox`<sup>→ P. 12</sup> and can be formatted with all lower part options. The distance between box and comment is controlled by `/tcb/middle`<sup>→ P. 50</sup>.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,listing above comment,
  center lower,image comment={width=3cm}{example-image-a.pdf}]
This is a \LaTeX\ example.
\end{tcblisting}
```

This is a \LaTeX\ example.



### N 2014-11-07 /tcb/listing above\* comment

(no value)


Widely equal to `/tcb/listing above comment`, but the outside comment is not formatted with the lower part options. Also, it is not put into a minipage and it may span several pages. The distance between box and comment is controlled by `/tcb/after`<sup>→ P. 90</sup>.

**/tcb/comment above listing**

(no value)

Typesets the environment content as listing in a `tcolorbox`<sup>P.12</sup> and a given comment outside and above the box. The outside text is treated as *lower* part of the `tcolorbox`<sup>P.12</sup> and can be formatted with all lower part options. The distance between box and comment is controlled by `/tcb/middle`<sup>P.50</sup>.

```
\begin{tcblisting}[colback=red!5!white,colframe=red!75!black,comment above listing,
  center lower,image comment={width=3cm}{example-image-a.pdf}]
This is a \LaTeX\ example.
\end{tcblisting}
```



This is a \LaTeX\ example.

**N 2014-11-07 /tcb/comment above\* listing**

(no value)

Widely equal to `/tcb/comment above listing`, but the outside comment is not formatted with the lower part options. Also, it is not put into a minipage and it may span several pages. The distance between box and comment is controlled by `/tcb/before`<sup>P.90</sup>.

## 17.9 Option Keys for Processing and Full Document Examples

A complete L<sup>A</sup>T<sub>E</sub>X document including `\documentclass`, `\begin{document}` and `\end{document}` cannot be processed directly by `tcolorbox`<sup>P.12</sup>. It always has to be compiled separately. There are two methods supported by the package to process and display such a full document example:

- Prepare and compile the example document independent from your main document. The source file and the resulting PDF file can be included into the main document afterwards. This is the most economic way since the example document can be left untouched after the example is complete.
- The other possibility is to compile the example on the fly while the main document is compiled. This way has some charm, because the example can be edited inside the main document. But be aware that the compilation of the example is issued on every run of the main document. Also, there are fewer degrees of freedom how the example is compiled.

For both methods, the resulting example PDF file can be included as a `/tcb/pdf comment`<sup>P.351</sup>.

The following example shows how to apply the first method. There already is a file `tcolorbox-example.tex` and a PDF file `tcolorbox-example.pdf`. Both of them are input partly by the following:

```
% \tcbuselibrary{breakable,skins,raster}
\tcbinputlisting{
    enhanced jigsaw,breakable,pad at break*=2mm,height fixed for=first and middle,
    lower separated=false,
    leftlower=0pt,rightlower=0pt,middle=0pt,
    colframe=red!50!black,colback=yellow!10!white,
    listing and comment,
    listing file={tcolorbox-example},
    listing options=
        {style=tcblatex,texcsstyle=*\color{red!70!black},firstline=20,lastline=85},
    after upper={\par\bigskip\textrtt{\ldots}\par},
    pdf comment,
    comment style={drop lifted shadow,graphics pages={1,\dots,4}},
}
```

```
% arara: pdflatex: { }
% arara: pdflatex: { synctex: yes }
%
\documentclass[article]
\usepackage{lipsum,lmodern}
\usepackage[most]{tcolorbox}

\begin{document}

%-----
\section{Colored boxes}

\begin{tcolorbox}[colback=red!5!white,colframe=red!75!black]
My box.
\end{tcolorbox}

\begin{tcolorbox}[colback=blue!5!white,colframe=blue!75!black,title=My title]
My box with my title.
\end{tcolorbox}
```

```

\begin{tcolorbox}[colback=green!5!white,colframe=green!75!black]
  Upper part of my box.
  \tcblower
  Lower part of my box.
\end{tcolorbox}

\begin{tcolorbox}[colback=yellow!5!white,colframe=yellow!50!black,
  colbacktitle=yellow!75!black,title=My title]
  I can do this also with a title.
  \tcblower
  Lower part of my box.
\end{tcolorbox}

\begin{tcolorbox}[colback=yellow!10!white,colframe=red!75!black,lowerbox=invisible,
  savelowerto=\jobname_ex.tex]
  Now, we play hide and seek. Where is the lower part?
  \tcblower
  I'm invisible until you find me.
\end{tcolorbox}

\begin{tcolorbox}[colback=yellow!10!white,colframe=red!75!black,title=Here I am]
  \input{\jobname_ex.tex}
\end{tcolorbox}

\begin{tcolorbox}[enhanced,sharp corners=uphill,
  colback=blue!50!white,colframe=blue!25!black,coltext=yellow,
  fontupper=\Large\bfseries,arc=6mm,boxrule=2mm,boxsep=5mm,
  borderline={0.3mm}{0.3mm}{white}]
  Funny settings.
\end{tcolorbox}

\begin{tcolorbox}[enhanced,frame style image=blueshade.png,
  opacityback=0.75,opacitybacktitle=0.25,
  colback=blue!5!white,colframe=blue!75!black,
  title=My title]
  This box is filled with an external image.\par
  Title and interior are made partly transparent to show the image.
\end{tcolorbox}

\begin{tcolorbox}[enhanced,attach boxed title to top
  center={yshift=-3mm,yshifttext=-1mm},
  colback=blue!5!white,colframe=blue!75!black,colbacktitle=red!80!black,
  title=My title,fonttitle=\bfseries,
  boxed title style={size=small,colframe=red!50!black} ]

...

```

## 4 Watermarks

### Box with a watermark picture

Here, you see my nice box with a picture as a watermark. This picture is automatically resized to fit the dimensions of my box. Instead of a picture, some text could be used or arbitrary graphical code. See the documentation for more options.

## 5 Boxes in boxes

### Box

#### Box inside box

##### Box inside box inside box

And now for something completely different: Boxes!

This | is | another | box.

## 6 Breakable Boxes

### Breakable box

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut pellit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue nec nisi neque. Pellentesque habitant morbi tristique phasellus ac, neque sed, feugiat ligula. Etiam egosias. Mauris leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor tortor eu, lobortis. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligma, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat

ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit nullis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natęque penitentes et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris. Nulla facilisi. Donec euismod enim. Donec felis enim congue felis, volutpat at, tincidunt tristique libero. Vivamus nonummy fermentum odio. Donec nonummy massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, ac cumnus nec, suscipit a, ipsam. Morbi blandit ligula feugiat magna. Numc occidit enim, non enim. Sed ut enim, non enim. Sed ut enim, non enim. Donec tincidunt urna, non enim. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quan in tellus. Nulla cursus pulvinar lectus. Donec et mi. Nam vulputate metus et enim. Vestibulum pellentesque felis et massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo ut lacinia. Donec euismod enim, non enim. In hac habitasse platea dictumst. Integer tempus convallis magna. Etiam facilisis. Numc elementum fermentum nisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit pugna est enim. Numc vitae tortor. Proin tempus nulli sit amet, non enim. Sed ut enim, non enim. Sed ut enim, non enim. Donec tincidunt urna, non enim. Curabitur a leo. Quisque estegas wisi a facibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, angus quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a sapien lacus convallis facilisis. Aliquam erat volutpat. Fringilla, wisi in dignissim interdum, jucundus levius sagittis elit et volutpat. Curabitur auctor tortor. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligma, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat

Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natęque penitentes et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris. Nulla facilisi. Donec euismod enim. Donec felis enim congue felis, volutpat at, tincidunt tristique libero. Vivamus nonummy fermentum odio. Donec nonummy massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, ac cumnus nec, suscipit a, ipsam. Morbi blandit ligula feugiat magna. Numc occidit enim, non enim. Sed ut enim, non enim. Sed ut enim, non enim. Donec tincidunt urna, non enim. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quan in tellus. Nulla cursus pulvinar lectus. Donec et mi. Nam vulputate metus et enim. Vestibulum pellentesque felis et massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo ut lacinia. Donec euismod enim, non enim. In hac habitasse platea dictumst. Integer tempus convallis magna. Etiam facilisis. Numc elementum fermentum nisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit pugna est enim. Numc vitae tortor. Proin tempus nulli sit amet, non enim. Sed ut enim, non enim. Sed ut enim, non enim. Donec tincidunt urna, non enim. Curabitur a leo. Quisque estegas wisi a facibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, angus quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a sapien lacus convallis facilisis. Aliquam erat volutpat. Fringilla, wisi in dignissim interdum, jucundus levius sagittis elit et volutpat. Curabitur auctor tortor. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligma, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat

Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natęque penitentes et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris. Nulla facilisi. Donec euismod enim. Donec felis enim congue felis, volutpat at, tincidunt tristique libero. Vivamus nonummy fermentum odio. Donec nonummy massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, ac cumnus nec, suscipit a, ipsam. Morbi blandit ligula feugiat magna. Numc occidit enim, non enim. Sed ut enim, non enim. Sed ut enim, non enim. Donec tincidunt urna, non enim. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quan in tellus. Nulla cursus pulvinar lectus. Donec et mi. Nam vulputate metus et enim. Vestibulum pellentesque felis et massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo ut lacinia. Donec euismod enim, non enim. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin

3

4

N 2014-11-14

### /tcb/no process

(no default)

Removes all processing commands if set before.

N 2014-11-14

### /tcb/process code=<code>

(no default, initially empty)

Adds <code> which is executed during `\tcbinputlisting→ P.336` and `\tcblisting→ P.334`. At the time of executing the given <code>, the listing is already written to `/tcb/listing file→ P.348`, but the colored box is not constructed yet. Its intended use is to process the listing somehow before displaying. The processing result can be used inside a `/tcb/comment→ P.349`. Several `/tcb/process code` options can be given which are processed in the given order. Typically, <code> is added by using the following styles `/tcb/run system command`, `/tcb/run pdflatex`, etc.



To use the further options, the compiler has to be called with the `-shell-escape` permission to authorize potentially dangerous system calls. Be warned that this is a security risk. Anyway, it's more economic to compile examples independent from the main document and to include them as shown in the previous pages.

N 2014-11-14

### /tcb/run system command=<system command>

(style, no default, initially unset)

Runs a <system command>, if the document is compiled with the `-shell-escape` permission. The current listing file can be accessed as `\filename@area\filename@base\filename@ext`. This <system command> is added to `/tcb/process code`.

N 2014-11-14

### /tcb/compilable listing

(style, no default)

Sets `/tcb/listing file→ P.348` to `\jobname-listing-<counter>`.



The default `/tcb/listing file→ P.348` setting cannot be used to compile a listing, since the base name equals the `\jobname` and the included PDF files should be unique. Therefore, to use `/tcb/run pdflatex` etc., the `/tcb/listing file→ P.348` has to be set to a unique value. One may use `/tcb/compilable listing` for this purpose.

N 2014-11-14

### /tcb/run pdflatex=<arguments>

(style, no default, initially unset)

Issues a `pdflatex` compilation of the listing with the given <arguments>.

- The main document has to be compiled with the `-shell-escape` permission.
- The `/tcb/listing file→ P.348` has to be unique for the listing.
- If the listing has to be compiled twice, add `run pdflatex` two times to the option list.

```
\begin{tcblisting}[enhanced jigsaw,lower separated=false,
leftlower=0pt,rightlower=0pt,
colframe=red!50!black,colback=yellow!10!white,
listing options={style=tcblatex,txcstyle=\color{red!70!black}},
listing and comment,
pdf comment,freeze pdf,
compilable listing,
run pdflatex
]
\documentclass[beamer]{}
\usepackage{Warsaw}
\begin{document}
\begin{frame}[Beamer example]
\begin{block}[Hello World]
\begin{itemize}[<+->]
\item One
\item Two
\end{itemize}
\end{block}
\begin{alertblock}[Integral]
\begin{equation}
```

```

\visible<3->{\int\limits_1^x \frac{1}{t}dt}
\visible<4->{ = \ln(x).}

\end{equation}
\end{alertblock}
\end{frame}
\end{document}
\end{tcblisting}

```

```

\documentclass{beamer}
\usepackage{Warsaw}
\begin{document}
\begin{frame}{Beamer example}
\begin{block}{Hello World}
\begin{itemize}[<+->]
\item One
\item Two
\end{itemize}
\end{block}

\begin{alertblock}{Integral}
\begin{equation}
\visible<3->{\int\limits_1^x \frac{1}{t}dt}
\visible<4->{ = \ln(x).}
\end{equation}
\end{alertblock}
\end{frame}
\end{document}

```

Beamer example

The slide has a dark blue header bar with the title 'Beamer example'. Below it is a light gray content area. In the top-left corner, there is a dark blue rounded rectangle containing the text 'Hello World' and a bulleted list: '• One'. To its right is a large, empty light red rounded rectangle labeled '(1)' at the bottom right. At the very bottom of the slide is a black navigation bar with small white icons.

Beamer example

This screenshot shows the same slide structure as the first one. The 'Hello World' section now includes the second item from the list: '• Two'. The 'Integral' block remains empty with the label '(1)'.

Beamer example

The slide structure is identical to the previous ones. The 'Hello World' section now contains both items: '• One' and '• Two'. The 'Integral' block shows the mathematical expression  $\int_1^x \frac{1}{t} dt$  with the label '(1)'.

Beamer example

The final screenshot shows the slide with all elements present. The 'Hello World' section contains both items. The 'Integral' block displays the completed equation  $\int_1^x \frac{1}{t} dt = \ln(x)$  with the label '(1)'.


N 2025-05-20	<code>/tcb/run pdflatex-dev=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>pdflatex-dev</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2014-11-14	<code>/tcb/run xelatex=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>xelatex</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2025-05-20	<code>/tcb/run xelatex-dev=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>xelatex-dev</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2014-11-14	<code>/tcb/run lualatex=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>lualatex</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2025-05-20	<code>/tcb/run lualatex-dev=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>lualatex-dev</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2014-11-14	<code>/tcb/run makeindex=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>makeindex</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2014-11-14	<code>/tcb/run bibtex=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>bibtex</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2014-11-14	<code>/tcb/run biber=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>biber</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2014-11-14	<code>/tcb/run arara=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues an <code>arara</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2025-05-20	<code>/tcb/run latexmk=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>latexmk</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2014-11-14	<code>/tcb/run latex=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>latex</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2025-05-20	<code>/tcb/run latex-dev=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>latex-dev</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	
N 2014-11-14	<code>/tcb/run dvips=&lt;arguments&gt;</code>	(style, no default, initially unset)
	Issues a <code>dvips</code> compilation of the listing with the given <code>&lt;arguments&gt;</code> .	

Issues a ps2pdf compilation of the listing with the given <arguments>.

```
\begin{tcblisting}{enhanced jigsaw,
  title={PSTricks with pdflatex},fonttitle=\bfseries,
  colframe=red!50!black,colback=yellow!10!white,
  listing options={style=tcbblatex,texcsstyle=*\color{red!70!black}\{}},
  lower separated=false,middle=0pt,
  listing side comment,righthand width=4cm,
  compilable listing,
  run latex,run dvips,run ps2pdf,
  pdf comment,freeze pdf,
  comment style={raster columns=1,
    graphics options={viewport=0.5in 7.7in 3.5in 10.5in,clip}\{}},
}
\documentclass{article}
\usepackage{pstricks,multido}
\begin{document}
\psset{unit=3}%
\multido{\nHue=0.01+0.01}{100}{%
\definecolor{MyColor}{hsb}{\nHue,1,1}%
\pscircle[linewidth=0.01,linecolor=MyColor]{\nHue}}
\end{document}
\end{tcblisting}
```

### PSTricks with pdflatex

```
\documentclass{article}
\usepackage{pstricks,multido}
\begin{document}
\psset{unit=3}%
\multido{\nHue=0.01+0.01}{100}{%
\definecolor{MyColor}{hsb}{\nHue,1,1}%
\pscircle[linewidth=0.01,linecolor=MyColor]{\nHue}}
\end{document}
```



! For most applications, you will like to add `/tcb/freeze pdf` as option, since the included `pdf` file is only refreshed, if the source for this file has changed.

N 2016-07-14 `/tcb/freeze file=<file>` (no default, initially unset)

Observes some `<file>`, usually the final file produced by `/tcb/process code`<sup>→ P. 361</sup>, `/tcb/run system command`<sup>→ P. 361</sup>, `/tcb/run pdflatex`<sup>→ P. 361</sup>, etc. If the MD5 checksum of the current `/tcb/listing file`<sup>→ P. 348</sup> is unchanged and `<file>` exists, the processing is skipped and the `<file>` is kept (frozen). Typically, the style `/tcb/freeze pdf` can be used for convenience.

N 2016-07-14 `/tcb/freeze none` (no default, initially set)

Freeze no file and always execute the given process commands.

N 2016-07-14 `/tcb/freeze extension=<text>` (style, no default)

Calls `/tcb/freeze file` with the current `/tcb/listing file`<sup>→ P. 348</sup> stripped with its extension plus `<text>` as new extension.

```
...
listing file=myfile.tex,
freeze extension=-modified.pdf,    % -> myfile-modified.pdf is observed
...
```

N 2016-07-14 `/tcb/freeze pdf` (no value)

Calls `/tcb/freeze file` with the current `/tcb/listing file`<sup>→ P. 348</sup> stripped with its extension plus `.pdf` as new extension.

N 2016-07-14 `/tcb/freeze png` (no value)

Calls `/tcb/freeze file` with the current `/tcb/listing file`<sup>→ P. 348</sup> stripped with its extension plus `.png` as new extension. See the examples for `/tcb/run pdflatex`<sup>→ P. 361</sup> and `/tcb/run ps2pdf`<sup>→ P. 364</sup>.

N 2016-07-14 `/tcb/freeze jpg` (no value)

Calls `/tcb/freeze file` with the current `/tcb/listing file`<sup>→ P. 348</sup> stripped with its extension plus `.jpg` as new extension.

## 17.10 Creation of L<sup>A</sup>T<sub>E</sub>X Tutorials

The following source code gives a guideline for the creation of L<sup>A</sup>T<sub>E</sub>X tutorials. In the next section, a framework for L<sup>A</sup>T<sub>E</sub>X exercises is described. All examples shall be numbered optionally.

Firstly, some additional tcb keys are defined for the appearance. For the examples, three environments `texexp`, `texexptitled`, and `texexptitledspec` are defined with automatic numbering.

- `texexp` is used for untitled examples,
- `texexptitled` is used for titled examples,
- `texexptitledspec` is used for titled examples with special treatment.

*Definition in the preamble:*

```
\tcbset{
    texexp/.style={colframe=red!50!yellow!50!black, colback=red!50!yellow!5!white,
        coltitle=red!50!yellow!3!white,
        fonttitle=\small\sffamily\bfseries, fontupper=\small, fontlower=\small},
    example/.style 2 args={texexp,
        title={Example \thetcbcounter: #1},label={#2}},
}

\newtcblisting[texexp][1]{texexp,#1}
\newtcblisting[auto counter,number within=section]{texexptitled}[3][]{%
    example={#2}{#3},#1}
\newtcolorbox[use counter from=texexptitled]{texexptitledspec}[3][]{%
    example={#2}{#3},#1}
```

```
\begin{tcblisting}[texexp]
This is a \LaTeX\ example which displays the text as source code
and in compiled form.
\end{tcblisting}
```

This is a \LaTeX\ example which displays the text as source code  
and in compiled form.

This is a L<sup>A</sup>T<sub>E</sub>X example which displays the text as source code and in compiled form.

```
\begin{texexptitled}{First example with a title line}{firstExample}
Here, we use Example \ref{firstExample} with a title line.
\end{texexptitled}
```

### Example 17.1: First example with a title line

Here, we use Example \ref{firstExample} with a title line.

Here, we use Example 17.1 with a title line.

```
\begin{texexp}{}  
This is a \LaTeX\ example which displays the text as source code  
and in compiled form.  
\end{texexp}
```

This is a \LaTeX\ example which displays the text as source code  
and in compiled form.

This is a LATEX example which displays the text as source code and in compiled form.

```
\begin{texexp}{text and listing}  
This is a \LaTeX\ example which displays the text as source code  
and in compiled form.  
\end{texexp}
```

This is a LATEX example which displays the text as source code and in compiled form.

This is a \LaTeX\ example which displays the text as source code  
and in compiled form.

```
\begin{texexp}{listing only}  
This is a \LaTeX\ example which displays the text as source code only.  
\end{texexp}
```

This is a \LaTeX\ example which displays the text as source code only.

```
\begin{texexp}{text only}  
This is a \LaTeX\ example which displays the text in compiled form only.  
\end{texexp}
```

This is a LATEX example which displays the text in compiled form only.

```
\begin{texexptitled}{An Example with a Heading}{heading1}  
This is a \LaTeX\ example with a numbered heading line  
which can be referred to.  
\end{texexptitled}  
Here, we see Example \ref{heading1}.
```

### Example 17.2: An Example with a Heading

This is a \LaTeX\ example with a numbered heading line  
which can be referred to.

This is a LATEX example with a numbered heading line which can be referred to.

Here, we see Example 17.2.

```
\begin{texexptitled}[listing only]{Another Example with a Heading}{heading2}
The keys can be used in combination. Here, an example with a heading line
and source code only is given.
\end{texexptitled}
Here, we see Example \ref{heading2}.
```

### Example 17.3: Another Example with a Heading

The keys can be used in combination. Here, an example with a heading line and source code only is given.

Here, we see Example 17.3.

```
\begin{texexptitled}[float]{A floating Example with a Heading}{heading3}
This is another \LaTeX\ example with numbered heading line.
But now, the box is a floating object.
\end{texexptitled}
```

### Example 17.4: A floating Example with a Heading

This is another \LaTeX\ example with numbered heading line.  
But now, the box is a floating object.

This is another L<sup>A</sup>T<sub>E</sub>X example with numbered heading line. But now, the box is a floating object.

The floating box of the last example is seen as Example \ref{heading3} on page \pageref{heading3}.

The floating box of the last example is seen as Example 17.4 on page 368.

```
\begin{texexptitledspec}{Special application}{texexpbox1}
\begin{lstlisting}[style=tcb latex]
Some \LaTeX\ source code.
\end{lstlisting}
\tcblower
For special cases, the environment |texexptitledspec| with style
|example| can be used directly. As one can see, the upper and the lower
part of the box can be used uncoupled also.
\end{texexptitledspec}
```

### Example 17.5: Special application

Some \LaTeX\ source code.


For special cases, the environment `texexptitledspec` with style `example` can be used directly. As one can see, the upper and the lower part of the box can be used uncoupled also.

The following series of examples demonstrate the application of `tcolorbox`<sup>→ P. 12</sup> options for diversification.

```
\begin{texexptitled}{How to use options (1)}{\par The basic example}{options1}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}
```

**Example 17.6: How to use options (1):  
The basic example**


```
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}
```



```
\begin{texexptitled}[center lower,enhanced,segmentation hidden,middle=0mm]{How to use options (2)}{\par The text output is centered and the  
segmentation line has vanished.}{options2}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}
```

**Example 17.7: How to use options (2):  
The text output is centered and the segmentation line has vanished.**

```
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}
```




```
\begin{texexptitled}[tikz lower,bicolor,colbacklower=white]
{How to use options (3):\par Here, the |tikzpicture| is totally hidden.
The |bicolor| skin highlights the output.}{options3}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{texexptitled}
```

**Example 17.8: How to use options (3):**

Here, the tikzpicture is totally hidden. The bicolor skin highlights the output.

```
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
```




```
\begin{texexptitled}[center lower,listing side text,righthand width=3.5cm,
bicolor,colbacklower=white]
{How to use options (4):\par The |bicolor| skin also works with side
by side mode}{options4}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
(\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}
```

**Example 17.9: How to use options (4):**

The bicolor skin also works with side by side mode


```
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
(\w:1cm) circle (7mm);}
\end{tikzpicture}
```




```
\begin{texexptitled}[center lower,listing outside text,righthand width=3.5cm]
{How to use options (5):\par Putting our picture outside is just
 a matter of one word.}{options5}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
 (\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}
```

**Example 17.10: How to use options (5):  
Putting our picture outside is just a matter of one word.**

```
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
 (\w:1cm) circle (7mm);}
\end{tikzpicture}
```



```
\begin{texexptitled}[center lower,text above listing]
{How to use options (6):\par The picture may also be put above
 the listing box.}{options6}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
 (\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}
```




**Example 17.11: How to use options (6):  
The picture may also be put above the listing box.**

```
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
 (\w:1cm) circle (7mm);}
\end{tikzpicture}
```

```
\begin{texexptitled}[beamer,center lower,text outside listing,lefthand width=3.5cm]
{How to use options (7):\par Our style is easily transformed into
a beamerish one.}{options7}
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
(\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{texexptitled}
```

**Example 17.12:** How to use options (7):  
Our style is easily transformed into a beamerish one.



```
\begin{tikzpicture}
\path[fill=yellow!50!white] (0,0) circle (11mm);
\path[fill=white] (0,0) circle (9mm);
\foreach \w/\c in {90/red,210/green,330/blue}
{\path[shading=ball,ball color=\c]
(\w:1cm) circle (7mm);}
\end{tikzpicture}
```

## 17.11 Creation of L<sup>A</sup>T<sub>E</sub>X Exercises

In the following, a guideline is given for the creation of L<sup>A</sup>T<sub>E</sub>X exercises with solutions. These solutions are saved to disk for application at a place of choice. Therefore, all used exercises are logged to a file `\jobname.records` for automatic processing. The solution contents themselves are saved to a subdirectory named `solutions`. Also see 8 on page 151.

- Before the first exercise is given, `\tcbstartrecording`<sup>→ P. 151</sup> has to be called to start recording.
- The solution is given as content of a `tcboutputlisting`<sup>→ P. 336</sup> environment. Note, that you can use this content also inside the exercise with `\tcbuselistingtext`<sup>→ P. 336</sup> in compiled form.
- After the last exercise is given (and before using the solutions), `\tcbstoprecording`<sup>→ P. 151</sup> has to be called to stop recording.
- The solutions are loaded by `\tcbinputrecords`<sup>→ P. 151</sup>.

Inside the exercise text, there may be text parts which are needed as L<sup>A</sup>T<sub>E</sub>X source code and as compiled text as well. These parts can be saved by `tcbwritetemp`<sup>→ P. 148</sup> and used in compiled form by `\tcbusetemp`<sup>→ P. 148</sup> or as source code by `\tcbusetemplisting`<sup>→ P. 336</sup>.

At first, we generate some a common style for the exercises and the solutions. Further, since exercises and solutions should be numbered, we force to use a label `<marker>`. Automatically, the label `exe:<marker>` is used to mark the exercise and the label `sol:<marker>` is used to mark the solution.

```
\tcbset{texercise/.style={arc=0.5mm, colframe=blue!25!yellow!90!white,
  colback=blue!25!yellow!5!white, coltitle=blue!25!yellow!40!black,
  fonttitle=\small\sffamily\bfseries, fontupper=\small, fontlower=\small,
  listing options={style=tcbflatex,texcsstyle=*\color{red!40!black}}},
  }
```

With these preparations, the kernel environment `texercise` for our exercises is created quickly:

*Definition in the preamble:*

```
\newcolorbox[auto counter,number within=section,list inside=exam]{texercise}[2][]{%
  texercisestyle,
  listing file={solutions/texercise\thetcbcounter.tex},
  label={exe:#2},
  record={\string\processsol{solutions/texercise\thetcbcounter.tex}{#2}},
  title={Exercise \thetcbcounter\hfill\mdseries Solution on page \pageref{sol:#2}},
  list text={Exercise with solution on page \pageref{sol:#2}},#1}
```

The following examples demonstrate the application.

```
\tcbstartrecording
```

```
\begin{texercise}{tabular_example}
\textit{Create the following table:}\par\smallskip%
\begin{tcboutputlisting}
\begin{tabular}{|p{3cm}|p{3cm}|p{3cm}|p{3cm}|}\hline
\multicolumn{4}{|c|}{\bfseries\itshape Das alte Italien}\hline
\multicolumn{2}{|c|}{\bfseries\itshape Antike} &
\multicolumn{2}{|c|}{\bfseries\itshape Mittelalter}\hline
\multicolumn{1}{|c|}{\itshape Republik}&
\multicolumn{1}{|c|}{\itshape Kaiserreich}&
\multicolumn{1}{|c|}{\itshape Franken}&
\multicolumn{1}{|c|}{\itshape Teilstaaten}\hline
In den Zeiten der r\"omischen Republik standen dem Staat jeweils zwei
Konsulen vor, deren Machtbefugnisse identisch waren. &
Das r\"omische Kaiserreich wurde von einem Alleinherrschер, dem Kaiser,
regiert.
& In der V\"olkkerwanderungszeit \u00fcbnahmen die Goten und sp\u00e4ter die
Franken die Vorherrschaft.
& Im sp\u00e4teren Mittelalter regierten F\u00fcrsten einen Fleckenteppich
von Einzelstaaten.\hline
\end{tabular}
\end{tcboutputlisting}
\tcbuselistingtext%
\end{texercise}
```

### Exercise 17.1

Solution on page 377

Create the following table:

Das alte Italien			
Antike		Mittelalter	
Republik	Kaiserreich	Franken	Teilstaaten
In den Zeiten der r\"omischen Republik standen dem Staat jeweils zwei Konsulen vor, deren Machtbefugnisse identisch waren.	Das r\"omische Kaiserreich wurde von einem Alleinherrsch\u00e4rer, dem Kaiser, regiert.	In der V\"olkkerwanderungszeit \u00fcbnahmen die Goten und sp\u00e4ter die Franken die Vorherrschaft.	Im sp\u00e4teren Mittelalter regierten F\u00fcrsten einen Fleckenteppich von Einzelstaaten.

```

\begin{texercise}{macro_oneparam}
\begin{tcboutputlisting}
\newcommand{\headingline}[1]{%
  \begin{center}\Large\bfseries #1\end{center}}
\end{tcboutputlisting}
\tcbuselistingtext%


Create a new macro \verb+\headingline+ which produces the
following output:\par\smallskip
\begin{tcbwritetemp}
\headingline{Very important heading}
\end{tcbwritetemp}
\tcbusetemp\listing\tcbusetemp%
\end{texercise}

```

### Exercise 17.2

Solution on page 377

Create a new macro `\headingline` which produces the following output:

```
\headingline{Very important heading}
```

**Very important heading**

```

\begin{texercise}{macro_twoparam}
\begin{tcboutputlisting}
\newcommand{\minitable}[2]{%
  \begin{center}\begin{tabular}{p{10cm}}\hline%
    \multicolumn{1}{c}{\bfseries#1}\hline%
    #2\hline%
  \end{tabular}\end{center}}
\end{tcboutputlisting}
\tcbuselistingtext%


Create a new macro \verb+\minitable+ which produces the
following output:\par\smallskip
\begin{tcbwritetemp}
\minitable{My heading}{In this tiny tabular, there is only a heading
  and some text below which has a width of ten centimeters.}
\end{tcbwritetemp}
\tcbusetemp\listing\par\smallskip\tcbusetemp%
\end{texercise}

```

### Exercise 17.3

Solution on page 377

Create a new macro `\minitable` which produces the following output:

```
\minitable{My heading}{In this tiny tabular, there is only a heading
  and some text below which has a width of ten centimeters.}
```

**My heading**

In this tiny tabular, there is only a heading and some text below  
which has a width of ten centimeters.

```

\begin{texercise}{macro_threeparam}
\begin{tcboutputlisting}
\newcommand{\synop}[3]{%
\begin{tabular}{@{}p{(\linewidth-\tabcolsep*2-\arrayrulewidth)/2}|%
p{(\linewidth-\tabcolsep*2-\arrayrulewidth)/2}@{}}\hline
\multicolumn{2}{c}{\bfseries #1}\hline
\multicolumn{1}{c|}{\itshape English}&
\multicolumn{1}{c}{\itshape German}\hline
#2 & #3
\end{tabular}}
\end{tcboutputlisting}
\tcbuselistingtext%
Create a new macro \verb+\synop+ which typesets a synoptic text according
to the following example. Base your macro on a tabular which takes the
total line width.\par\smallskip
\begin{tcbwritetemp}
\synop{Neil Armstrong}%
{That's one small step for a man, one giant leap for mankind.}%
{Das ist ein kleiner Schritt f\"ur einen Mann,
ein riesiger Sprung f\"ur die Menschheit.}%
\end{tcbwritetemp}
\tcbusetempling\par\smallskip\tcbwritetemp%
\end{texercise}

```

#### Exercise 17.4

Solution on page 378

Create a new macro `\synop` which typesets a synoptic text according to the following example. Base your macro on a tabular which takes the total line width.

```

\synop{Neil Armstrong}%
{That's one small step for a man, one giant leap for mankind.}%
{Das ist ein kleiner Schritt f\"ur einen Mann,
ein riesiger Sprung f\"ur die Menschheit.}

```

#### Neil Armstrong

<i>English</i>	<i>German</i>
That's one small step for a man, one giant leap for mankind.	Das ist ein kleiner Schritt für einen Mann, ein riesiger Sprung für die Menschheit.

\tcbstoprecording

Now, we give a list of all exercises with:

```

\tcblistoff[\subsection]{exam}{List of Exercises%
\label{listofexercises}}

```

## 17.12 List of Exercises

17.1 Exercise with solution on page 377 . . . . .	374
17.2 Exercise with solution on page 377 . . . . .	375
17.3 Exercise with solution on page 377 . . . . .	375
17.4 Exercise with solution on page 378 . . . . .	376

## 17.13 Solutions for the given L<sup>A</sup>T<sub>E</sub>X Exercises

For all solutions, a macro `\processsol` was written to the file `\jobname.records`. Now, we need a definition for this macro to use the solutions.

```
% \usepackage{hyperref} % for phantomlabel
\newtcbinputlisting{\processsol}[2]{%
texercise,
listing only,
listing file={#1},
phantomlabel={sol:#2},%
title={Solution for Exercise \ref{exe:#2} on page \pageref{exe:#2}},%
}
```

The loading of all solutions is done by:

```
\tcbinputrecords
```

With this, we get:

### Solution for Exercise 17.1 on page 374

```
\begin{tabular}{|p{3cm}|p{3cm}|p{3cm}|p{3cm}|}\hline
\multicolumn{4}{|c|}{\bfseries\itshape Das alte Italien}\\\hline
\multicolumn{2}{|c|}{\bfseries Antike} &
\multicolumn{2}{|c|}{\bfseries Mittelalter}\\\hline
\multicolumn{1}{|c|}{\itshape Republik}&
\multicolumn{1}{|c|}{\itshape Kaiserreich}&
\multicolumn{1}{|c|}{\itshape Franken}&
\multicolumn{1}{|c|}{\itshape Teilstaaten}\\\hline
In den Zeiten der r\"omischen Republik standen dem Staat jeweils zwei
Konsuln vor, deren Machtbefugnisse identisch waren. &
Das r\"omische Kaiserreich wurde von einem Alleinherrschter, dem Kaiser,
regiert.
& In der V\"olkkerwanderungszeit \"ubernahmen die Goten und sp\"ater die
Franken die Vorherrschaft.
& Im sp\"ateren Mittelalter regierten F\"ursten einen Fleckenteppich
von Einzelstaaten.\\\hline
\end{tabular}
```

### Solution for Exercise 17.2 on page 375

```
\newcommand{\headingline}[1]{%
\begin{center}\Large\bfseries #1\end{center}}
```

### Solution for Exercise 17.3 on page 375

```
\newcommand{\minitable}[2]{%
\begin{center}\begin{tabular}{p{10cm}}\hline%
\multicolumn{1}{c}{\bfseries#1}\\\hline%
#2\\\hline%
\end{tabular}\end{center}}
```

Solution for Exercise 17.4 on page 376

```
\newcommand{\synop}[3]{%
\begin{tabular}{@{}p{(\linewidth-\tabcolsep*2-\arrayrulewidth)/2}|%
p{(\linewidth-\tabcolsep*2-\arrayrulewidth)/2}@{}}
\hline
\multicolumn{2}{c}{\bfseries #1}\\\hline
\multicolumn{1}{c|}{\itshape English}&
\multicolumn{1}{c}{\itshape German}\\\hline
#2 & #3
\end{tabular}}
```

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{theorems}
```

This also loads the package `amsmath`<sup>→ CTAN</sup>.

Denis Bitouzé, Muzimuzhi, and many others provided very valuable input for this library.

### 18.1 Macros of the Library

U 2022-07-18 `\NewTcbTheorem[<init options>]{<name>}{<display name>}{<options>}{<prefix>}`

U 2022-07-18 `\newtcbtheorem[<init options>]{<name>}{<display name>}{<options>}{<prefix>}`

Creates new environments `<name>` and `<name>*` based on `tcolorbox` to frame a (mathematical) theorem. The `<display name>` is used in the title line with a number, e.g. «Theorem 5.1». The `<options>` are given to the underlying `tcolorbox` to control the appearance. The `<init options>` allow setting up automatic numbering, see 5 on page 128.

If `<name>` is chosen as `footheorem`, the new environments are described by

```
\begin{footheorem}[<keys>][<short>]{<title>}{<marker>}
  <environment content>
\end{footheorem}
```

Here, `<title>` is the title text for the theorem and is also set as `/tcb/nameref`<sup>→ P. 116</sup> identifier. Optionally, the `<short>` title used instead as `/tcb/nameref`<sup>→ P. 116</sup> identifier and in lists of theorems. `<keys>` supplement the `<options>` and may be used only in rare cases. The theorem is automatically labeled with `<prefix><separator><marker>` where `<separator>` is predefined as “:”, see `/tcb/label separator`<sup>→ P. 387</sup>.

```
\begin{footheorem*}[<keys>]{<title>}
  <environment content>
\end{footheorem*}
```

This represents an unnumbered variant. Again, `<title>` is the title text for the theorem and `<keys>` supplement the `<options>`. This variant is not labeled and not listed in lists of theorems.

**!** `\NewTcbTheorem` and `\newtcbtheorem` are identical and both rely on `\NewTColorBox`<sup>→ P. 17</sup> based on `\NewDocumentCommand`.

*Definition in the preamble:*

```
\NewTcbTheorem[number within=section]{mytheo}{My Theorem}%
{colback=green!5,colframe=green!35!black,fonttitle=\bfseries}{th}
```

```
% usage of '\nameref' needs 'nameref' or 'hyperref' to be loaded
\begin{mytheo}{This is my title}{theoexample}
  This is the text of the theorem. The counter is automatically assigned and,
  in this example, prefixed with the section number. This theorem is numbered with
  \ref{th:theoexample}, it is given on page~\pageref{th:theoexample},
  and it is titled \fbox{\nameref{th:theoexample}}
```

```
\end{mytheo}
```

### My Theorem 18.1: This is my title

This is the text of the theorem. The counter is automatically assigned and, in this example, prefixed with the section number. This theorem is numbered with 18.1, it is given on page 380, and it is titled «This is my title».

```
% usage of '\nameref' needs 'nameref' or 'hyperref' to be loaded
\begin{mytheo}[] [Concise title]{This my very long theorem title with
  too much words}{theoexample2}
  Here we have a long and a short title. This theorem is numbered with
  \ref{th:theoexample2}, it is given on page~\pageref{th:theoexample2},
  and it is titled \fbox{\nameref{th:theoexample2}}
```

```
\end{mytheo}
```

### My Theorem 18.2: This my very long theorem title with too much words

Here we have a long and a short title. This theorem is numbered with 18.2, it is given on page 380, and it is titled «Concise title».

```
\begin{mytheo}[label=myownlabel]{This is my title}{}%
  The label parameter can be left empty without \LaTeX\ error.
  Or you may use an own label to reference Theorem \ref{myownlabel}.
\end{mytheo}
```

### My Theorem 18.3: This is my title

The label parameter can be left empty without L<sup>A</sup>T<sub>E</sub>X error. Or you may use an own label to reference Theorem 18.3.

```
\begin{mytheo}{}{}%
  The title can also be left empty without problem. Note that the \enquote{:}
  vanished magically.
\end{mytheo}
```

### My Theorem 18.4

The title can also be left empty without problem. Note that the “:” vanished magically.

```
\begin{mytheo*}{Unnumbered Theorem}
  This theorem is not numbered.
\end{mytheo*}
```

### My Theorem: Unnumbered Theorem

This theorem is not numbered.

```
\begin{mytheo*}{}}
  This theorem has no number and no title.
\end{mytheo*}
```

### My Theorem

This theorem has no number and no title.



To switch off the `nameref` feature permanently, add `nameref/.style={}` inside the `(options)` list.

**U** 2022-07-18

`\RenewTcbTheorem[<init options>]{<name>}{<display name>}{<options>}{<prefix>}`

**U** 2022-07-18

`\renewtcbtheorem[<init options>]{<name>}{<display name>}{<options>}{<prefix>}`

Operates like `\NewTcbTheorem`<sup>P.379</sup>, but based on `\RenewDocumentEnvironment` instead of `\NewDocumentEnvironment`. Existing environments are redefined.

**N** 2022-07-18

`\ProvideTcbTheorem[<init options>]{<name>}{<display name>}{<options>}{<prefix>}`

Operates like `\NewTcbTheorem`<sup>P.379</sup>, but based on `\ProvideDocumentEnvironment` instead of `\NewDocumentEnvironment`. New environments are only created if they are not already defined.

**N** 2022-07-18

`\DeclareTcbTheorem[<init options>]{<name>}{<display name>}{<options>}{<prefix>}`

Operates like `\NewTcbTheorem`<sup>P.379</sup>, but based on `\DeclareDocumentEnvironment` instead of `\NewDocumentEnvironment`. New environments are always created and possibly redefine existing ones.

### \tcbboxmath[*options*]{*mathematical box content*}

Creates a `tcolorbox`<sup>→ P.12</sup> which is fitted to the width of the given *mathematical box content*. This box is intended to be applied as part of a larger formula and may be used as replacement for the `\boxed` macro of `amsmath`.

```
\begin{equation}
\tcbset{fonttitle=\scriptsize}
\tcbboxmath[colback=LightBlue!25!white,colframe=blue]{ a^2 = 16 }
\quad \Rightarrow \quad
\tcbboxmath[colback=Salmon!25!white,colframe=red,title=Implication]%
{ a = 4 \vee a = -4. }
\end{equation}
```

$$a^2 = 16 \quad \Rightarrow \quad \begin{array}{c} \text{Implication} \\ a = 4 \vee a = -4. \end{array} \quad (3)$$

### \tcbhighmath[*options*]{*mathematical box content*}

This is a special case of the `\tcbboxmath` macro which uses the style `/tcb/highlight math`<sup>→ P.392</sup>. It is intended to provide context sensitive highlighting of formula parts. The color settings via `/tcb/highlight math style`<sup>→ P.392</sup> may be different inside theorems or other colored areas and outside.

```
\tcbset{myformula/.style={colback=yellow!10!white,colframe=red!50!black,
every box/.style={highlight math style={colback=LightBlue!50!white,colframe=Navy}}}
}

\begin{align}
\tcbhighmath{\sum_{n=1}^{\infty} \frac{1}{n} &= \infty. \\
\int x^2 dx &= \frac{1}{3}x^3 + c.}
\end{align}

\begin{tcolorbox}[ams align,myformula]
\tcbhighmath{\sum_{n=1}^{\infty} \frac{1}{n} &= \infty. \\
\int x^2 dx &= \frac{1}{3}x^3 + c.}
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (4)$$

$$\int x^2 dx = \frac{1}{3}x^3 + c. \quad (5)$$

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (6)$$

$$\int x^2 dx = \frac{1}{3}x^3 + c. \quad (7)$$

`\tcbhighmath`<sup>P. 382</sup> can be used in symbiosis with the `empheq`<sup>→ CTAN</sup> package which allows to specify own boxing commands to mark multiline formulas.

```
% \usepackage{empheq}
\begin{empheq}[box=\tcbhighmath]{align}
a &= \sin(z) \\
E &= mc^2 + \int_a^b x \, dx
\end{empheq}

\tcbsset{highlight math style={enhanced,
    colframe=red!60!black, colback=yellow!50!white, arc=4pt, boxrule=1pt,
    drop fuzzy shadow}}


\begin{empheq}[box=\tcbhighmath]{align}
a &= \sin(z) \\
E &= mc^2 + \int_a^b x \, dx
\end{empheq}
```

$$a = \sin(z) \quad (8)$$

$$E = mc^2 + \int_a^b x \, dx \quad (9)$$

$$a = \sin(z) \quad (10)$$

$$E = mc^2 + \int_a^b x \, dx \quad (11)$$

Besides `\tcbhighmath`<sup>P. 382</sup>, one can easily define an independent new box based on `\tcbox`<sup>P. 14</sup> which acts like `\tcbhighmath`<sup>P. 382</sup>:

```
% \usepackage{empheq}
\newtcbox{\otherbox}[1][]{nobeforeafter,math upper,tcbx raise base,
    enhanced,frame hidden,boxrule=0pt,interior style={top color=green!10!white,
    bottom color=green!10!white,middle color=green!50!yellow},
    fuzzy halo=1pt with green,#1}

\begin{empheq}[box=\otherbox]{align}
a &= \sin(z) \\
E &= mc^2 + \int_a^b x \, dx
\end{empheq}

\begin{equation}
\tcbhighmath{E} = \otherbox{mc^2}
\end{equation}
```

$$a = \sin(z) \quad (12)$$

$$E = mc^2 + \int_a^b x \, dx \quad (13)$$

$$\boxed{E} = \boxed{mc^2} \quad (14)$$

## 18.2 Option Keys of the Library

/tcb/separator sign=<sign>

(no default, initially :)

The given <sign> is used inside the title text of a theorem as separator between display name combined with number and the specific title text. It is omitted, if there is no specific title text.

```
% \usepackage{amssymb}
\new tcb theorem [use counter from=mytheo]{sometheorem}{Theorem}%
  {colback=white,colframe=red!50!black,fonttitle=\bfseries,
   separator sign={\blacktriangleright}}{theo}
\begin{sometheorem}{My example}{}%
  My theorem text.
\end{sometheorem}
```

Theorem 18.5 ▶ My example

My theorem text.

/tcb/separator sign colon

(style, no value, initially set)

Sets /tcb/separator sign to the default colon : sign.

/tcb/separator sign dash

(style, no value)

Sets /tcb/separator sign to an en-dash sign.

```
\new tcb theorem [use counter from=mytheo]{sometheorem}{Theorem}%
  {colback=white,colframe=red!50!black,fonttitle=\bfseries,
   separator sign dash}{theo}
\begin{sometheorem}{My example}{}%
  My theorem text.
\end{sometheorem}
```

Theorem 18.6 – My example

My theorem text.

/tcb/separator sign none

(style, no value)

Sets /tcb/separator sign to empty.

```
\new tcb theorem [use counter from=mytheo]{sometheorem}{Theorem}%
  {colback=white,colframe=red!50!black,fonttitle=\bfseries,
   separator sign none}{theo}
\begin{sometheorem}{My example}{}%
  My theorem text.
\end{sometheorem}
```

Theorem 18.7 My example

My theorem text.

`/tcb/description delimiters={⟨left⟩}{⟨right⟩}` (no default, initially empty)

The given `⟨left⟩` and `⟨right⟩` delimiter signs are used to frame the descriptive title text of a theorem.

```
\new tcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 description delimiters={\flqq}{\frqq}{theo}}
\begin{sometheorem}{My example}{}%
My theorem text.
\end{sometheorem}
```

#### Theorem 18.8: «My example»

My theorem text.

`/tcb/description delimiters parenthesis` (style, no value)

Sets `/tcb/description delimiters` to `(` and `)`.

```
\new tcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 description delimiters parenthesis}{theo}
\begin{sometheorem}{My example}{}%
My theorem text.
\end{sometheorem}
```

#### Theorem 18.9: (My example)

My theorem text.

`/tcb/description delimiters none` (style, no value, initially set)

Sets `/tcb/description delimiters` to the default empty texts.

`/tcb/description color=⟨color⟩` (default empty, initially empty)

Sets the `⟨color⟩` of the descriptive title text deviating from `/tcb/colttitle`<sup>→ P.35</sup>. The color is reset to `/tcb/colttitle`<sup>→ P.35</sup>, if `description color` is used without value.

```
\new tcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 description color=red!25!yellow}{theo}
\begin{sometheorem}{My example}{}%
My theorem text.
\end{sometheorem}
```

#### Theorem 18.10: My example

My theorem text.

**/tcb/description font**=⟨text⟩ (default empty, initially empty)

Sets ⟨text⟩ (e.g. font settings) before the descriptive title text deviating from /tcb/fonttitle<sup>→ P. 36</sup>. The ⟨text⟩ is removed, if **description font** is used without value.

```
\new tcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 description delimiters={\glqq}{\grqq},
 description font=\mdseries\itshape}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

Theorem 18.11: „My example“

My theorem text.

**/tcb/description formatter**=⟨macro⟩ (default empty, initially empty)

Sets ⟨macro⟩ as formatter for the descriptive title text. The ⟨macro⟩ has to take one mandatory argument (the description text).

Note that /tcb/description delimiters<sup>→ P. 385</sup>, /tcb/description color<sup>→ P. 385</sup>, and /tcb/description font are ignored, if this option is used.

If **description formatter** is used without value, the formatter is reset to its standard behavior.

```
\newtcbbox{\formbox}{enhanced,frame empty,size=minimal,boxsep=2pt,arc=1pt,
on line,interior style image=goldshade.png}

\new tcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 description formatter=\formbox}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

Theorem 18.12: My example

My theorem text.

**/tcb/terminator sign**=⟨sign⟩ (no default, initially empty)

The given ⟨sign⟩ is used as terminator at the end of the title text of a theorem.

```
\new tcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 terminator sign={.}}{theo}
\begin{sometheorem}{My example}{}
My theorem text.
\end{sometheorem}
```

Theorem 18.13: My example.

My theorem text.

### /tcb/terminator sign colon

(style, no value, initially set)

Sets /tcb/terminator sign<sup>→ P. 386</sup> to the colon : sign.

```
\new tcbtheorem [use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 separator sign dash,terminator sign colon}{theo}
\begin{sometheorem}{My example}{}%
My theorem text.
\end{sometheorem}
```

#### Theorem 18.14 – My example:

My theorem text.

### /tcb/terminator sign dash

(style, no value)

Sets /tcb/terminator sign<sup>→ P. 386</sup> to an en-dash sign.

```
\new tcbtheorem [use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 terminator sign dash}{theo}
\begin{sometheorem}{My example}{}%
My theorem text.
\end{sometheorem}
```

#### Theorem 18.15: My example –

My theorem text.

### /tcb/terminator sign none

(style, no value)

Sets /tcb/terminator sign<sup>→ P. 386</sup> to the default empty text.

### N 2016-04-19 /tcb/label separator=<separator>

(no default, initially :)

The given <separator> is used for labels created with environments which are defined themselves by \new tcbtheorem<sup>→ P. 379</sup>. This <separator> is put between <prefix> (defined by \new tcbtheorem<sup>→ P. 379</sup>) and <marker> (defined by an actual theorem environment).

```
\new tcbtheorem [use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 label separator=**}{theo}
\begin{sometheorem}{My example}{myex}%
My theorem text.
\end{sometheorem}
See Example~\ref{theo*myex}.
```

#### Theorem 18.16: My example

My theorem text.

See Example 18.16.

`/tcb/theorem full label supplement={<style>}` (no default, initially empty)

The given `<style>` is used in connection with labels created with environments which are defined themselves by `\new tcbtheorem→ P. 379`. This `<style>` uses one argument which is automatically set to the full label marker of the environment, i.e. a text consisting of `<prefix>` (defined by `\new tcbtheorem→ P. 379`), `/tcb/label separator→ P. 387`, and `<marker>` (defined by an actual theorem environment).

```
% The following adds a hyper target to all environments
% created with \new tcbtheorem
\tcbset{theorem full label supplement={hypertarget={#1}}}

\new tcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
  {colback=white,colframe=red!50!black,fonttitle=\bfseries}{theo}
\begin{sometheorem}{My example}{myex2}
My theorem text.
\end{sometheorem}
This automated \hyperlink{theo:myex2}{hyper target can be linked to with a
hyper link}.
```

### Theorem 18.17: My example

My theorem text.

This automated hyper target can be linked to with a hyper link.

A second usage of `/tcb/theorem full label supplement` overwrites the first setting.

`/tcb/theorem label supplement={<style>}` (no default, initially empty)

The given `<style>` is used in connection with labels created with environments which are defined themselves by `\new tcbtheorem→ P. 379`. This `<style>` uses one argument which is automatically set to the label `<marker>` defined by an actual theorem environment.

A second usage of `/tcb/theorem label supplement` overwrites the first setting, but `/tcb/theorem full label supplement` and `/tcb/theorem label supplement` can be used independently.

```
% 'marginnote' has to be loaded
\new tcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
  {colback=white,colframe=red!50!black,fonttitle=\bfseries,
   theorem label supplement={hypertarget={XYZ-##1}},
   theorem full label supplement={code={\marginnote{##1}}}}
\begin{sometheorem}{My example}{myex3}
My theorem text.
\end{sometheorem}
This automated \hyperlink{XYZ-myex3}{hyper target can be linked to with a
hyper link}.
```

### Theorem 18.18: My example

My theorem text.

This automated hyper target can be linked to with a hyper link.

Sets the hanging indent of the theorem title to `auto` or the given `<length>`. For `auto`, the hanging indent matches the display name, number and separator sign of the theorem. If `<length>` is negative, the theorem title is indented positively without hanging indent.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries}{theo}

\begin{sometheorem}{This is a very long and complicated title for a quite
short and nearly empty theorem}{myexA1}
My theorem text.
\end{sometheorem}

\begin{sometheorem}[theorem hanging indent=5mm]{This is a very long and
complicated title for a quite short and nearly empty theorem}{myexA2}
My theorem text.
\end{sometheorem}

\begin{sometheorem}[theorem hanging indent=0pt]{This is a very long and
complicated title for a quite short and nearly empty theorem}{myexA3}
My theorem text.
\end{sometheorem}

\begin{sometheorem}[theorem hanging indent=-5mm]{This is a very long and
complicated title for a quite short and nearly empty theorem}{myexA4}
My theorem text.
\end{sometheorem}
```

**Theorem 18.19:** This is a very long and complicated title for a quite short and  
nearly empty theorem

My theorem text.

**Theorem 18.20:** This is a very long and complicated title for a quite short and  
nearly empty theorem

My theorem text.

**Theorem 18.21:** This is a very long and complicated title for a quite short and  
nearly empty theorem

My theorem text.

**Theorem 18.22:** This is a very long and complicated title for a quite short  
and nearly empty theorem

My theorem text.

**/tcb/theorem name and number**

(style, no value, initially set)

Prints theorem name followed by theorem number inside the title.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 theorem name and number}{theo}
\begin{sometheorem}{My example}{}\\
My theorem text.
\end{sometheorem}
```

**Theorem 18.23: My example**

My theorem text.

**/tcb/theorem number and name**

(style, no value)

Prints theorem number followed by theorem name inside the title.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{colback=white,colframe=red!50!black,fonttitle=\bfseries,
 theorem number and name}{theo}
\begin{sometheorem}{My example}{}\\
My theorem text.
\end{sometheorem}
```

**18.24 Theorem: My example**

My theorem text.

**/tcb/theorem name**

(style, no value)

Prints theorem name without number inside the title.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{enhanced,colback=white,colframe=red!50!black,fonttitle=\bfseries,
 theorem name,watermark text={\thetcbcounter}}{theo}
\begin{sometheorem}{My example}{}\\
My theorem text.
\end{sometheorem}
```

**Theorem: My example**

My theorem text.

**18.25**

**N 2021-12-03 /tcb/theorem number**

(style, no value)

Prints theorem number without name inside the title.

```
\newtcbtheorem[use counter from=mytheo]{sometheorem}{Theorem}%
{enhanced,colback=white,colframe=red!50!black,fonttitle=\bfseries,
 theorem number}{theo}
\begin{sometheorem}{My example}{}\\
My theorem text.
\end{sometheorem}
```

**18.26: My example**

My theorem text.

**/tcb/theorem**={⟨display name⟩}{⟨counter⟩}{⟨title⟩}{⟨marker⟩} (no default)

This key can be used directly in a `tcolorbox` for a more flexible approach to create a theorem type box. The ⟨display name⟩ is used together with the increased ⟨counter⟩ value and the ⟨title⟩ for the title line of the box. Additionally, a `\label` with the given ⟨marker⟩ is created.

```
% \newcounter{texercise}% preamble
\begin{tcolorbox}[colback=green!10,colframe=green!50!black,arc=4mm,
    theorem={Test}{texercise}{Direct usage}{myMarker}]
Here, we see the test \ref{myMarker}.
\end{tcolorbox}
```

Test 1: Direct usage

Here, we see the test 1.

For a common appearance inside the document, the key `theorem` should not be used directly as in the example above, but as part of a new environment created by hand or using `\newtcboxtheorem`<sup>P.379</sup>.

### /tcb/highlight math

(style, no value)

A style which is used for  $\text{\tcbhighmath}^{\rightarrow \text{P.382}}$  and which is predefined as `notitle,nophantom,colframe=red,colback=yellow!25!white`.

It can be changed with the usual pgf techniques or with `/tcb/highlight math style`.

```
\begin{align*}
  \tcbhighmath{1} + 1 &= 2, \\
  \tcbset{highlight math/.append style={left=0mm,right=0mm,top=0mm,bottom=0mm}}
  \tcbhighmath{1} + 1 &= 2.
\end{align*}
```

$$1 + 1 = 2,$$

$$1 + 1 = 2.$$

### /tcb/highlight math style=<style definition>

(style, no default)

Changes the definition for `/tcb/highlight math` to `notitle,nophantom` plus the given `<style definition>`. See  $\text{\tcbhighmath}^{\rightarrow \text{P.382}}$  for another example.

```
% \tcbuselibrary{skins}
\tcbset{highlight math style={enhanced,%<-- needed for the 'remember' options
  colframe=red,colback=red!10!white,boxsep=0pt}}
\begin{align*}
\tcbhighmath[remember as=fx]{f(x)}
&= \int_1^x \frac{1}{t^2} dt \\
&= \left[ -\frac{1}{t} \right]_1^x \\
&= -\frac{1}{x} + \frac{1}{1} \\
&= 1 - \frac{1}{x}.
\end{align*}
```

$$\begin{aligned}
f(x) &= \int_1^x \frac{1}{t^2} dt = \left[ -\frac{1}{t} \right]_1^x \\
&= -\frac{1}{x} + \frac{1}{1} \\
&= 1 - \frac{1}{x}.
\end{aligned}$$

**/tcb/math upper** (style, no value)

Sets the upper part to mathematical mode with font `\displaystyle`.

**/tcb/math lower** (style, no value)

Sets the lower part to mathematical mode with font `\displaystyle`.

**/tcb/math** (style, no value)

Sets the upper part *and* lower part to mathematical mode with font `\displaystyle`.

```
\begin{tcolorbox}[math,colback=yellow!10!white,colframe=red!50!black]
  \sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$



The following styles are only tested to work with the original `amsmath` environments. If e.g. the `equation` environment is redefined as `gather`, then `/tcb/ams equation` should / could not be used. Obviously, you are encouraged to use `/tcb/ams gather`<sup>P.395</sup> in this case.

**U 2014-10-30 /tcb/ams equation upper** (style, no value)

Adds an `amsmath equation` environment to the start and end of the upper part.

**U 2014-10-30 /tcb/ams equation lower** (style, no value)

Adds an `amsmath equation` environment to the start and end of the lower part.

**U 2014-10-30 /tcb/ams equation** (style, no value)

Adds an `amsmath equation` environment to the start and end of the upper *and* lower part.

```
\begin{tcolorbox}[ams equation,colback=yellow!10!white,colframe=red!50!black]
  \sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \tag{15}$$

**U 2014-10-30 /tcb/ams equation\* upper** (style, no value)

Adds an `amsmath equation*` environment to the start and end of the upper part.

**U 2014-10-30 /tcb/ams equation\* lower** (style, no value)

Adds an `amsmath equation*` environment to the start and end of the lower part.

**U 2014-10-30 /tcb/ams equation\*** (style, no value)

Adds an `amsmath equation*` environment to the start and end of the upper *and* lower part.

```
\begin{tcolorbox}[ams equation*,colback=yellow!10!white,colframe=red!50!black]
  \sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$

**/tcb/ams align upper**  
**/tcb/ams align**

(style, no value)  
(style, no value)

Adds an `amsmath align` environment to the start and end of the upper part.

```
\begin{tcolorbox}[ams align,colback=yellow!10!white,colframe=red!50!black]
  \sum_{n=1}^{\infty} \frac{1}{n} &= \infty. \\
  \int x^2 dx &= \frac{1}{3}x^3 + c.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (16)$$

$$\int x^2 dx = \frac{1}{3}x^3 + c. \quad (17)$$

! Boxes with `/tcb/ams align upper` or `/tcb/ams align` cannot have a lower part!  
For a lower part, use `/tcb/ams nodisplayskip upper`<sup>P.396</sup> instead.

**/tcb/ams align lower**

(style, no value)

Adds an `amsmath align` environment to the start and end of the lower part.

**/tcb/ams align\* upper**  
**/tcb/ams align\***

(style, no value)  
(style, no value)

Adds an `amsmath align*` environment to the start and end of the upper part.

```
\begin{tcolorbox}[ams align*,colback=yellow!10!white,colframe=red!50!black]
  \sum_{n=1}^{\infty} \frac{1}{n} &= \infty. \\
  \int x^2 dx &= \frac{1}{3}x^3 + c.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$

$$\int x^2 dx = \frac{1}{3}x^3 + c.$$

! Boxes with `/tcb/ams align* upper` or `/tcb/ams align*` cannot have a lower part!  
For a lower part, use `/tcb/ams nodisplayskip upper`<sup>P.396</sup> instead.

**/tcb/ams align\* lower**

(style, no value)

Adds an `amsmath align*` environment to the start and end of the lower part.

**/tcb/ams gather upper**  
**/tcb/ams gather**

(style, no value)  
(style, no value)

U 2024-06-27 Adds an `amsmath` `gather` environment to the start and end of the upper part.

```
\begin{tcolorbox}[ams_gather,colback=yellow!10!white,colframe=red!50!black]
  \sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty. \\
  \int x^2 \, dx = \frac{1}{3}x^3 + c.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (18)$$

$$\int x^2 \, dx = \frac{1}{3}x^3 + c. \quad (19)$$

! Boxes with `/tcb/ams gather upper` or `/tcb/ams gather` cannot have a lower part!  
For a lower part, use `/tcb/ams nodisplayskip upper`<sup>P.396</sup> instead.

**/tcb/ams gather lower**

(style, no value)

U 2024-06-27 Adds an `amsmath` `gather` environment to the start and end of the lower part.

**/tcb/ams gather\* upper**  
**/tcb/ams gather\***

(style, no value)  
(style, no value)

U 2024-06-27 Adds an `amsmath` `gather*` environment to the start and end of the upper part.

```
\begin{tcolorbox}[ams_gather*,colback=yellow!10!white,colframe=red!50!black]
  \sum\limits_{n=1}^{\infty} \frac{1}{n} = \infty. \\
  \int x^2 \, dx = \frac{1}{3}x^3 + c.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$

$$\int x^2 \, dx = \frac{1}{3}x^3 + c.$$

! Boxes with `/tcb/ams gather* upper` or `/tcb/ams gather*` cannot have a lower part!  
For a lower part, use `/tcb/ams nodisplayskip upper`<sup>P.396</sup> instead.

**/tcb/ams gather\* lower**

(style, no value)

U 2024-06-27 Adds an `amsmath` `gather*` environment to the start and end of the lower part.

`/tcb/ams nodisplayskip upper` (style, no value)

Neutralizes the `\abovedisplayskip` of a following `align` or `gather` environment for the upper part. Note that the text content has to start with such a formula.

`/tcb/ams nodisplayskip lower` (style, no value)

Neutralizes the `\abovedisplayskip` of a following `align` or `gather` environment for the lower part. Note that the text content has to start with such a formula.

`/tcb/ams nodisplayskip` (style, no value)

Neutralizes the `\abovedisplayskip` of a following `align` or `gather` environment for the upper part *and* lower part. Note that the text content has to start with such a formula.

```
\begin{tcolorbox}[ams nodisplayskip,colback=yellow!10!white,colframe=red!50!black]
\begin{gather}
\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \\
\int x^2 dx = \frac{1}{3}x^3 + c.
\end{gather}
And now for something completely different.
\end{tcolorbox}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (20)$$

$$\int x^2 dx = \frac{1}{3}x^3 + c. \quad (21)$$

And now for something completely different.

New colored mathematical environments are easily created using `\newtcolorbox`<sup>P. 16</sup>.

```
\newtcolorbox{mymath}{ams gather*,colback=yellow!10!white,colframe=red!50!black}

\begin{mymath}
\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \\
\int x^2 dx = \frac{1}{3}x^3 + c.
\end{mymath}
```

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty.$$

$$\int x^2 dx = \frac{1}{3}x^3 + c.$$

All described options like `/tcb/ams gather upper`<sup>P. 395</sup>, `/tcb/ams gather lower`<sup>P. 395</sup>, `/tcb/ams gather`<sup>P. 395</sup> are (partially) setting (overwriting) the keys `/tcb/before upper`<sup>P. 72</sup>, `/tcb/after upper`<sup>P. 73</sup>, `/tcb/before lower`<sup>P. 74</sup>, `/tcb/after lower`<sup>P. 75</sup>.

Therefore, e.g. `\tcbset{ams gather,before upper={\text{Pythagoras:}}}` produces an invalid result. For this case, you are invited to use `\tcbset{ams gather,before upper app={\text{Pythagoras:}}},` see `/tcb/before upper app`<sup>P. 472</sup>.

`/tcb/theorem style=<name>`

(no default, initially `standard`)

Applies a predefined style `<name>` to the theorem environment. Some of the feasible `<name>` values resemble style names from the packages `theorem`<sup>→ CTAN</sup> and `ntheorem`<sup>→ CTAN</sup> to give convenient access to known patterns.

! The styles alter `/tcb/separator sign`<sup>→ P. 384</sup>, `/tcb/description`  
`delimiters`<sup>→ P. 385</sup>, `/tcb/terminator sign`<sup>→ P. 386</sup>, and more. Therefore, one  
should apply such keys *after* a theorem style.

For the following examples, we use:

*Definition in the preamble:*

```
\NewTcbTheorem[use counter from=mytheo]{theorem}{Theorem}{%
  fonttitle=\bfseries\upshape,fontupper=\itshape,
  colframe=green!50!black,colback=green!10!white,
  colbacktitle=green!20!white,coltitle=blue!75!black}{theo}
```

The predefined styles are:

- `standard`: This is the initial value.

```
\begin{theorem}[theorem style=standard]{standard}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

#### Theorem 18.27: standard

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- `change standard`

```
\begin{theorem}[theorem style=change standard]{change standard}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

#### 18.28 Theorem: change standard

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- `plain`

```
\begin{theorem}[theorem style=plain]{plain}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

#### Theorem 18.29 (plain): *This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **break**

```
\begin{theorem}[theorem style=break]{break}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

**Theorem 18.30 (break):**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **plain apart**

```
\begin{theorem}[theorem style=plain apart]{plain apart}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

**Theorem 18.31 (plain apart)**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **change**

```
\begin{theorem}[theorem style=change]{change}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

**18.32 Theorem (change):** *This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **change break**

```
\begin{theorem}[theorem style=change break]{change break}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

**18.33 Theorem (change break):**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **change apart**

```
\begin{theorem}[theorem style=change apart]{change apart}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

**18.34 Theorem (change apart)**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **margin**

```
\begin{theorem}[theorem style=margin, left=10mm]{margin}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}  
\begin{theorem}[theorem style=margin, left=10mm, oversize]{margin}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

**18.35 Theorem (margin):** *This is my theorem.*

$$a^2 + b^2 = c^2.$$

**18.36 Theorem (margin):** *This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **margin break**

```
\begin{theorem}[theorem style=margin break, left=10mm]{margin break}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}  
\begin{theorem}[theorem style=margin break, left=10mm, oversize]{margin break}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

**18.37 Theorem (margin break):**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

**18.38 Theorem (margin break):**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

- **margin apart**

```
\begin{theorem}[theorem style=margin apart, left=10mm]{margin apart}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}  
\begin{theorem}[theorem style=margin apart, left=10mm, oversize]{margin apart}{}  
This is my theorem. \begin{equation*} a^2 + b^2 = c^2. \end{equation*}  
\end{theorem}
```

**18.39 Theorem (margin apart)**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

**18.40 Theorem (margin apart)**

*This is my theorem.*

$$a^2 + b^2 = c^2.$$

### 18.3 Examples for Definitions and Theorems

In the following, the application of `\new tcb theorem`<sup>→ P. 379</sup> to highlight mathematical definitions, theorems, or the like is demonstrated.

At first, additional `tcb` keys are created for the appearance of the colored boxes. It is assumed that theorems and corollaries should be identically colored. All following environments are numbered with a common counter, but this can be changed easily. Here, the counter output is supplemented by the subsection number. Further, the `zref-clever`<sup>→ CTAN</sup> package [2] is used for clever references.

*Definition in the preamble:*

```
% \usepackage{zref-clever}
\tcbset{
    defstyle/.style={fonttitle=\bfseries\upshape, fontupper=\slshape,
                    arc=0mm, colback=blue!5!white,colframe=blue!75!black},
    theostyle/.style={fonttitle=\bfseries\upshape, fontupper=\slshape,
                     colback=red!10!white,colframe=red!75!black},
}
\NewTcbTheorem[number within=subsection]{Definition}{Definition}%
{defstyle,label type=definition}{def}
\NewTcbTheorem[use counter from=Definition]{Theorem}{Theorem}%
{theostyle,label type=theorem}{theo}
\NewTcbTheorem[use counter from=Definition]{Corollary}{Corollary}%
{theostyle,label type=corollary}{cor}
```

By `\new tcb theorem`<sup>→ P. 379</sup>, commonly numbered theorem environments are created now. `defstyle` and `theostyle` are used for the appearance.

! If you not need `zref-clever`<sup>→ CTAN</sup> support, drop `/tcb/label type`<sup>→ P. 115</sup> from the definitions above.

Now, everything is prepared for the following examples.

The following theorem is numbered as `\zcref[S]{theo:diffbarstetig}` and referenced with the marker `\texttt{theo:diffbarstetig}`. Alternatively, use the basic form `Theorem-\ref{theo:diffbarstetig}`.

```
\begin{Theorem}{Differenzierbarkeit bedingt Stetigkeit, wobei diese Benennung zu Testzwecken ungewöhnlich lang ist}{diffbarstetig}
Eine Funktion $f:I\rightarrow\mathbb{R}$ ist in $x_0\in I$ stetig, wenn $f$ in $x_0$ differenzierbar ist.
\end{Theorem}
```

The following theorem is numbered as `Theorem 18.3.1` and referenced with the marker `theo:diffbarstetig`. Alternatively, use the basic form `Theorem 18.3.1`.

**Theorem 18.3.1: Differenzierbarkeit bedingt Stetigkeit, wobei diese Benennung zu Testzwecken ungewöhnlich lang ist**

*Eine Funktion \$f : I \rightarrow \mathbb{R}\$ ist in \$x\_0 \in I\$ stetig, wenn \$f\$ in \$x\_0\$ differenzierbar ist.*

The following definition is numbered as `\zcref[cap]{def:diffbarkeit}` and referenced with the marker `\texttt{def:diffbarkeit}.\bigskip`

```
\begin{Definition}{Differenzierbarkeit}{diffbarkeit}
Eine Funktion  $f: I \rightarrow \mathbb{R}$  auf einem Intervall  $I$  heißt  $x_0 \in I$  differenzierbar oder linear approximierbar, wenn der Grenzwert
\begin{equation*}
\lim_{x \rightarrow x_0} \frac{f(x) - f(x_0)}{x - x_0} = \lim_{h \rightarrow 0} \frac{f(x_0 + h) - f(x_0)}{h}
\end{equation*}
existiert. Bei Existenz heißt  $x_0$  dieser Grenzwert Ableitung oder Differentialquotient von  $f$  in  $x_0$  und man schreibt  $f'(x_0)$  oder ihn
\begin{equation*}
f'(x_0) \quad \text{oder} \quad \frac{df}{dx}(x_0).
\end{equation*}
\end{Definition}
```

The following definition is numbered as Definition 18.3.2 and referenced with the marker `def:diffbarkeit`.

### Definition 18.3.2: Differenzierbarkeit

Eine Funktion  $f : I \rightarrow \mathbb{R}$  auf einem Intervall  $I$  heißt in  $x_0 \in I$  differenzierbar oder linear approximierbar, wenn der Grenzwert

$$\lim_{x \rightarrow x_0} \frac{f(x) - f(x_0)}{x - x_0} = \lim_{h \rightarrow 0} \frac{f(x_0 + h) - f(x_0)}{h}$$

existiert. Bei Existenz heißt dieser Grenzwert Ableitung oder Differentialquotient von  $f$  in  $x_0$  und man schreibt für ihn

$$f'(x_0) \quad \text{oder} \quad \frac{df}{dx}(x_0).$$

The following corollary is numbered as `\zcref{cor:nullstellen}` and referenced with the marker `\texttt{cor:nullstellen}.\bigskip`

```
\begin{Corollary}{Nullstellenexistenz}{nullstellen}
Ist  $f : [a, b] \rightarrow \mathbb{R}$  stetig und haben  $f(a)$  und  $f(b)$  entgegengesetzte Vorzeichen, also  $f(a)f(b) < 0$ , so besitzt  $f$  eine Nullstelle  $x_0 \in ]a, b[$ , also  $f(x_0) = 0$ .
\end{Corollary}
```

The following corollary is numbered as corollary 18.3.3 and referenced with the marker `cor:nullstellen`.

### Corollary 18.3.3: Nullstellenexistenz

Ist  $f : [a, b] \rightarrow \mathbb{R}$  stetig und haben  $f(a)$  und  $f(b)$  entgegengesetzte Vorzeichen, also  $f(a)f(b) < 0$ , so besitzt  $f$  eine Nullstelle  $x_0 \in ]a, b[$ , also  $f(x_0) = 0$ .

```
\begin{Theorem}[boxrule=2mm,toptitle=-1.5mm,bottomtitle=-1.5mm]{%
    Hinreichende Bedingung f\"ur Wendepunkte}{wendehinreichend}%
$f$ sei eine auf einem Intervall $]a,b[$ dreimal stetig differenzierbare Funktion.  

Ist $f''(x_0)=0$ in $x_0 \in ]a,b[$ und $f'''(x_0) \neq 0$, so ist  

$(x_0, f(x_0))$ ein Wendepunkt von $f$.
\end{Theorem}
```

### Theorem 18.3.4: Hinreichende Bedingung für Wendepunkte

*f sei eine auf einem Intervall \$]a,b[\$ dreimal stetig differenzierbare Funktion. Ist \$f''(x\_0) = 0\$ in \$x\_0 \in ]a,b[\$ und \$f'''(x\_0) \neq 0\$, so ist \$(x\_0, f(x\_0))\$ ein Wendepunkt von f.*

```
% \usepackage{zref-clever}
% \usepackage{zref-vario}
% \tcbuselibrary{skins}
\newtcboxtheorem[use counter from=Definition]{YetAnotherTheorem}[Theorem]{%
    theorem style=plain apart,label type=theorem,enhanced,frame hidden,
    boxrule=2mm,titlerule=0mm,toptitle=1mm,bottomtitle=1mm,
    fonttitle=\bfseries\large,fontupper=\normalsize,
    coltitle=green!35!black,colbacktitle=green!15!white,
    colback=green!50!yellow!15!white,borderline={1pt}{Opt}{green!25!blue},
}{theo}

\begin{YetAnotherTheorem}[Mittelwertsatz f\"ur $n$ Variable]{meanvaluethm}%
Es sei $n \in \mathbb{N}$, $D \subset \mathbb{R}^n$ eine offene Menge und  

$f \in C^1(D, \mathbb{R})$. Dann gibt es auf jeder Strecke  

$[x_0, x] \subset D$ einen Punkt $\xi \in [x_0, x]$, so dass gilt  

\begin{equation*}
f(x) - f(x_0) = \operatorname{grad} f(\xi)^T (x - x_0)
\end{equation*}
\end{YetAnotherTheorem}

\medskip
Here, |zref-clever| support is used to reference \zcref[S]{theo:meanvaluethm} on \zcpageref{theo:meanvaluethm}. This \zcref*[noref]{theo:meanvaluethm} can also be referenced by |\zvref| resulting in \zvref[S]{theo:meanvaluethm}.
```

### Theorem 18.3.5 (Mittelwertsatz für n Variable)

Es sei \$n \in \mathbb{N}\$, \$D \subseteq \mathbb{R}^n\$ eine offene Menge und \$f \in C^1(D, \mathbb{R})\$. Dann gibt es auf jeder Strecke \$[x\_0, x] \subset D\$ einen Punkt \$\xi \in [x\_0, x]\$, so dass gilt

$$f(x) - f(x_0) = \operatorname{grad} f(\xi)^T (x - x_0)$$

Here, |zref-clever| support is used to reference Theorem 18.3.5 on page 402. This theorem can also be referenced by |\zvref| resulting in Theorem 18.3.5.

! Note that `/tcb/label type→ P.115` was used in the example above to feed `zref-clever→ CTAN` [2] with the needed name information.

Here, using `\zvref` resulting in `\zvref[S]{theo:meanvaluethorem}`  
is more interesting\ldots

Here, using `\zvref` resulting in Theorem 18.3.5 on the preceding page is more interesting...

```
% \tcbuselibrary{skins}
\newtcbtheorem[use counter from=Definition]{YetAnotherTheorem}{Theorem}%
{theorem style=change apart,enhanced,arc=0mm,outer arc=0mm,
boxrule=0mm,toprule=1mm,bottomrule=1mm,left=1mm,right=1mm,
titlerule=0mm,toptitle=0mm,bottomtitle=1mm,top=0mm,
colframe=red!50!black,colback=red!5!white,coltitle=red!50!black,
title style={top color=yellow!50!white,bottom color=red!5!white,
middle color=yellow!50!white},
fonttitle=\bfseries\sffamily\normalsize,fontupper=\normalsize\itshape,
}{theo}

\begin{YetAnotherTheorem}{Mittelwertsatz f\"{u}r $n$ Variable}{mittelwertsatz_n2}%
Es sei $n \in \mathbb{N}$, $D \subseteq \mathbb{R}^n$ eine offene Menge und  

$f \in C^1(D, \mathbb{R})$. Dann gibt es auf jeder Strecke  

$[x_0, x] \subset D$ einen Punkt $\xi \in [x_0, x]$, so dass gilt  

\begin{equation*}
f(x) - f(x_0) = \operatorname{grad} f(\xi)^T (x - x_0)
\end{equation*}
\end{YetAnotherTheorem}
```

### 18.3.6 Theorem (Mittelwertsatz für $n$ Variable)

Es sei  $n \in \mathbb{N}$ ,  $D \subseteq \mathbb{R}^n$  eine offene Menge und  $f \in C^1(D, \mathbb{R})$ . Dann gibt es auf jeder Strecke  $[x_0, x] \subset D$  einen Punkt  $\xi \in [x_0, x]$ , so dass gilt

$$f(x) - f(x_0) = \operatorname{grad} f(\xi)^T (x - x_0)$$

```
% \usepackage{varwidth} \tcbuselibrary{skins}
\newtcbtheorem[use counter from=Definition]{YetAnotherTheorem}{Theorem}%
{enhanced,frame empty,interior empty,colframe=ForestGreen!50!white,
coltitle=ForestGreen!50!black,fonttitle=\bfseries,colbacktitle=ForestGreen!15!white,
borderline={0.5mm}{0mm}{ForestGreen!15!white},
borderline={0.5mm}{0mm}{ForestGreen!50!white,dashed},
attach boxed title to top center={yshift=-2mm},
boxed title style={boxrule=0.4pt},varwidth boxed title}{theo}

\begin{YetAnotherTheorem}{Mittelwertsatz f\"{u}r $n$ Variable}{mittelwertsatz_n3}%
Es sei $n \in \mathbb{N}$, $D \subseteq \mathbb{R}^n$ eine offene Menge und  

$f \in C^1(D, \mathbb{R})$. Dann gibt es auf jeder Strecke  

$[x_0, x] \subset D$ einen Punkt $\xi \in [x_0, x]$, so dass gilt  

\begin{equation*}
f(x) - f(x_0) = \operatorname{grad} f(\xi)^T (x - x_0)
\end{equation*}
\end{YetAnotherTheorem}
```

### Theorem 18.3.7: Mittelwertsatz für $n$ Variable

Es sei  $n \in \mathbb{N}$ ,  $D \subseteq \mathbb{R}^n$  eine offene Menge und  $f \in C^1(D, \mathbb{R})$ . Dann gibt es auf jeder Strecke  $[x_0, x] \subset D$  einen Punkt  $\xi \in [x_0, x]$ , so dass gilt

$$f(x) - f(x_0) = \operatorname{grad} f(\xi)^T (x - x_0)$$

You need more attention for your theorems? Here, you are ...

```
% tcbuselibrary{skins} % preamble
\begin{Theorem}[enhanced,
    fuzzy halo=3mm with yellow,
    fuzzy halo=2mm with red,
    fuzzy halo=1mm with yellow,
    watermark color=red!35!white,
    watermark text={Overacting\\Fundamental Theorem}]%
{Fundamental Theorem of Theorems}{fundamental}%
\lipsum[1-2]
\end{Theorem}
```

### Theorem 18.3.8: Fundamental Theorem of Theorems

*Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.*

*Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.*

Let's try a more conservative approach:

```
% \tcbuselibrary{skins}
\newtcbtheorem[use counter from=Definition]{YetAnotherTheorem}{Theorem}%
{theorem style=plain, enhanced, colframe=blue!50!black, colback=yellow!20!white,
 coltitle=red!50!black, fonttitle=\upshape\bfseries, fontupper=\itshape,
 drop fuzzy shadow=blue!50!black!50!white, boxrule=0.4pt}{theo}

\begin{YetAnotherTheorem}[Mittelwertsatz f\"ur $n$ Variable]{mittelwertsatz_n4}%
Es sei $n \in \mathbb{N}$, $D \subset \mathbb{R}^n$ eine offene Menge und
$f \in C^1(D, \mathbb{R})$. Dann gibt es auf jeder Strecke
$[x_0, x] \subset D$ einen Punkt $\xi \in [x_0, x]$, so dass gilt
\begin{equation*}
f(x) - f(x_0) = \operatorname{grad} f(\xi)^T (x - x_0)
\end{equation*}
\end{YetAnotherTheorem}
```

**Theorem 18.3.9 (Mittelwertsatz für  $n$  Variable):** Es sei  $n \in \mathbb{N}$ ,  $D \subseteq \mathbb{R}^n$  eine offene Menge und  $f \in C^1(D, \mathbb{R})$ . Dann gibt es auf jeder Strecke  $[x_0, x] \subset D$  einen Punkt  $\xi \in [x_0, x]$ , so dass gilt

$$f(x) - f(x_0) = \operatorname{grad} f(\xi)^T (x - x_0)$$

## 18.4 Using other theorem environments with `tcolorbox`

Instead of creating theorem environments with the methods described before, environments from other packages can be boxed with a `tcolorbox`.

Environments may be created e.g. by methods from the `theorem`<sup>→ CTAN</sup> package or the `amsthm`<sup>→ CTAN</sup> package. `\tcolorboxenvironment`<sup>→ P. 23</sup> can be used to put a box around these environments.

*Definition in the preamble:*

```
\usepackage{amsthm}

\theoremstyle{plain}%
\newtheorem{lem}{Lemma}%

\tcolorboxenvironment{lem}%
  enhanced jigsaw,colframe=cyan,interior hidden,
  breakable,before skip=10pt,after skip=10pt }

\tcolorboxenvironment{proof}%
  blanker,breakable,left=5mm,
  before skip=10pt,after skip=10pt,
  borderline west={1mm}{0pt}{red}
```

```
\begin{lem}
  \lipsum[2]
\end{lem}

\lipsum[3]

\begin{proof}
  \lipsum*[4]
\end{proof}
```

**Lemma 1.** *Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.*

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

*Proof.* Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula. □

## 19 Library breakable

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{breakable}
```

This also loads the package `pdfcol`<sup>→ CTAN</sup>.

### 19.1 Technical Overview

The library  `breakable` supports the automatic breaking of a `tcolorbox`. This feature is enabled by `/tcb/breakable`<sup>→ P. 408</sup> and disabled by `/tcb/unbreakable`<sup>→ P. 409</sup>.

If a `tcolorbox` is set to be `/tcb/breakable`<sup>→ P. 408</sup>, then the following algorithm is executed:

1. The box content is read to a box register similar but not identical to the unbreakable case.
2. If the total box fits into the current page, it is shipped out visibly unbroken and the algorithm stops.

#### Unbroken Box

The box.

unbroken

3. Otherwise, it is checked if at least `/tcb/lines before break`<sup>→ P. 409</sup> of the upper box can be placed on the current page. If not, a page break is inserted and the algorithm goes back to Step 2.
4. Now, the *break sequence* starts. The upper box part or the lower box part is split such that it fits into the current page. The fitting part is named *first part* of the *break sequence* and shipped out.

#### Broken Box

The box.

first

5. If the remaining content of the total box fits into the current page, the algorithm continues with Step 7, else with Step 6.
6. The upper box part or the lower box part is split such that it fits into the current page. The fitting part is named *middle part* of the *break sequence* and shipped out. Then, the algorithm goes back to Step 5.

The box.

middle

7. The remaining part is named *last part* of the *break sequence* and shipped out. The algorithm stops.

The box.

last

The algorithm takes care that the optional segmentation line never appears at the end of a box. The optional lower box part is also checked to have at least `/tcb/lines before break`<sup>→ P. 409</sup>.

In principle, all boxes of the *break sequence* share the same geometric parameters. The differences are:

- The given `/tcb/before`<sup>P. 90</sup> and `/tcb/after`<sup>P. 90</sup> values are used only before the *first* and after the *last* part of the *break sequence*.
- A special behavior between the parts of the *break sequence* can be given by `/tcb/toprule at break`<sup>P. 413</sup>, `/tcb/bottomrule at break`<sup>P. 413</sup>, `/tcb/enlarge top at break by`<sup>P. 98</sup>, and `/tcb/enlarge bottom at break by`<sup>P. 98</sup>.
- The `/tcb/skin`<sup>P. 157</sup> decides *how* the *first*, *middle*, and *last* part look like. Actually, every part type has its own skin given by the options `/tcb/skin first`<sup>P. 157</sup>, `/tcb/skin middle`<sup>P. 157</sup>, and `/tcb/skin last`<sup>P. 157</sup>. Typically, these options are set automatically by the main skin, see Subsection 19.8 from page 422.

## 19.2 Limitations and Known Bugs

- The maximal total height of the upper and of the lower part of normal breakable `tcolorboxes` is about 65536pt (ca. 2300cm) apiece. If such a part gets longer, the output will get buggy without warning. For very oversized boxes which are longer than 65536pt, use the `unlimited` value for `/tcb/breakable`<sup>P. 408</sup>. With the `unlimited` setting, the applied algorithm has (virtually) no height limit for boxes, but very likely the compiler memory will have to be increased for boxes longer than 300 pages (depending on compiler settings and box content). But it is recommended to use `unlimited` for critical large boxes only.
- You can nest an unbreakable `tcolorbox` inside another `tcolorbox`, even inside a breakable one. But you cannot nest a breakable box inside a breakable box. The `/tcb/breakable`<sup>P. 408</sup> key for a nested box is ignored automatically<sup>4</sup>, i. e. inner boxes are always unbreakable.

After all, in the unlikely case you really want to have the nested box to be breakable, use `/tcb/enforce breakable`<sup>P. 409</sup> for the nested box<sup>5</sup>. **But, a breakable box inside a breakable box will usually give a mess.**

- N 2020-09-17
- Depending on the L<sup>A</sup>T<sub>E</sub>X engine, if your text content contains some text color changing commands, your color may not survive the break to the next box. See the documentation for `/tcb/use color stack`<sup>P. 411</sup> for more information.

- N 2014-10-30
- The `perpage` option of the `footmisc`<sup>CTAN</sup> package is deliberately deactivated inside a breakable box since all footnotes are placed at the end of the box (possibly far away from the reference point).

- N 2016-02-15
- Making a box `/tcb/breakable`<sup>P. 408</sup> which actually is not broken creates a box which acts *almost* like an unbreakable box. Visual differences are kept as indiscernible as possible, but can appear with certain `/tcb/before`<sup>P. 90</sup> and `/tcb/after`<sup>P. 90</sup> settings, especially, if there is an automatic page break before the box.

- N 2016-05-25
- LuaT<sub>E</sub>X version 0.95 changes the behavior of the basic `\vsplit` (a bug?!) resulting in badly broken boxes. Thanks to Jeremy Engel, the `\breakable` library contains a patch for this which also loads the the `ifluatex`<sup>CTAN</sup> package.

---

<sup>4</sup>Until `tcolorbox` 3.04, the `/tcb/breakable`<sup>P. 408</sup> key was not ignored for nested boxes.

<sup>5</sup>`/tcb/enforce breakable`<sup>P. 409</sup> acts like `/tcb/breakable`<sup>P. 408</sup> until `tcolorbox` 3.04.

### 19.3 Main Option Keys

U 2017-02-01

/tcb/breakable=true|false|unlimited

(default true, initially false)

Allows the `tcolorbox` to be breakable. If the box is larger than the available space at the current page, the box is automatically broken and continued to the next page. All sorts of `tcolorbox` can be made breakable. It depends on the skin how the breaking looks like. If you do not know better, use `/tcb/enhanced`<sup>P. 235</sup> for breaking a box. The parts of the *break sequence* are numbered by the counter `tcbbreakpart`.

- `false`: Sets the `tcolorbox` to be unbreakable.
- `true`: Breaks the `tcolorbox` from one page to another. The maximal total height of the upper and of the lower part is about 65536pt (ca. 2300cm or ca. 90 pages) apiece.
- `unlimited`: Experimental code for unlimited total height of breakable boxes. For boxes longer than 300 pages (or even shorter ones) the compiler memory will have to be increased.

```
% \usepackage{lipsum} % preamble
\tcbsset{enhanced jigsaw,colback=red!5!white,colframe=red!75!black,
watermark color=yellow!25!white,watermark text=\arabic{tcbbreakpart},
fonttitle=\bfseries}

\begin{tcolorbox}[breakable,title=My breakable box]
\lipsum[1-6]
\end{tcolorbox}
```

#### My breakable box

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt

ultrices. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

#### /tcb/unbreakable

(no value, initially set)

Sets the `tcolorbox` to be unbreakable.

#### /tcb/enforce breakable

(no value)

A `tcolorbox` inside a `tcolorbox` is automatically set to be unbreakable. Using `/tcb/breakable`<sup>→ P. 408</sup> on such an inner box has no effect. If one *really* wants the inner box to be breakable, use `/tcb/enforce breakable`. **This will usually give a mess of shattered boxes. You are advised to not use this option.**

Note that `/tcb/enforce breakable` has the functionality that `/tcb/breakable`<sup>→ P. 408</sup> had until package version 3.04 and exists for backward compatibility.

#### U 2018-07-26 /tcb/title after break=<text>

(no default, initially empty)

The `/tcb/title`<sup>→ P. 24</sup> is used only for the *first* part of a *break sequence*. Use `title after break` to create a heading line with `<text>` as content for all following parts. Also see `/tcb/extras title after break`<sup>→ P. 416</sup> for formatting the title text.

#### /tcb/notitle after break

(no value, initially set)

Removes the title line or following parts in a *break sequence* if set before.

#### /tcb/adjusted title after break=<text>

(style, no default, initially unset)

Works like `/tcb/adjusted title`<sup>→ P. 24</sup> but applied to `/tcb/title after break`.

#### /tcb/lines before break=<number>

(no default, initially 2)

Assures that the given `<number>` of lines of the upper box part or the lower box part are placed before a break happens.

**/tcb/break at=<length>/<length>/.../<length>**

(no default, initially Opt)

Defines break points at the given *<length>* values. The first *<length>* defines the (maximal) height of the first partial box, the second *<length>* defines the (maximal) height of the second partial box, and so on. The last *<length>* value is applied to all following partial boxes if any.

- Setting a *<length>* to Opt means that the naturally available space is used for breaking.
- Setting a *<length>* to a negative value means that the sum of this negative value and the naturally available space is used for breaking (boxes will shrink in height). Note that before version 4.10 negative values were treated like Opt.

```
% \usepackage{multicol,lipsum}
\begin{multicols}{3}\footnotesize
Breakable boxes inside a |multicols| environment need special attendance.
They are broken by default at |\textheight|.
The |break at| option can be used to insert better break points by hand.
\begin{tcolorbox}[enhanced jigsaw,size=small,vfill before first,
colframe=red,colback=yellow!10!white,before title=\raggedright,
title={Broken box inside a |multicols| environment},fonttitle=\bfseries,
enforce breakable,% use only breakable in the real world!
pad at break=1mm,break at=3cm/6.3cm]
\lipsum[1]
\end{tcolorbox}
\refKey{/tcb/height fixed for} may also be considered for |multicols| environments.
\end{multicols}
```

Breakable boxes inside a `multicols` environment need special attendance. They are broken by default at `\textheight`. The `break at` option can be used to insert better break points by hand.

**Broken box inside a  
multicols environment**

`Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dic-`

tum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, premium quis, viverra ac, nunc.

Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

`/tcb/height fixed for`<sup>→ P. 414</sup>  
may also be considered for  
`multicols` environments.

**/tcb/enlargepage=<length>/<length>/.../<length>**

(no default, initially Opt)

Inserts a `\enlargethispage{<length>}` to the pages of the break sequence, i. e. allows one to enlarge (or shrink) partial boxes. The first *<length>* is applied to the first partial box, the second *<length>* is applied to the second partial box, and so on. The last *<length>* value is applied to all following partial boxes if any. Note that floating boxes will not be enlarged.

```
\begin{tcolorbox}[breakable,enlargepage=0mm/\baselineskip/2\baselineskip/0mm,...]
```

The example code enlarged the second partial box by one line, the third partial box by two lines, and all following parts are not enlarged.

- !
- If an automated page break occurs before the first partial box, the page enlargement is applied to the page before the first partial box *and* again to the page of the first partial box. Insert a manual break to prevent this.
  - In general, `enlargepage` should be used at the final stage of a document for fine-tuning only.

`/tcb/enlargepage flexible=<length>` (no default, initially `0pt`)

This allows an automated page enlargement for up to  $\langle length \rangle$ . The algorithm can use this to avoid breaking a box, if there is enough room after enlargement. Also, the *last* partial box of a break sequence may be enlarged to avoid further breaking.

Note that this potential enlargement is *additive* to settings of `/tcb/enlargepage`<sup>→ P. 410</sup>. But `/tcb/enlargepage flexible` overwrites settings of `/tcb/pad before break*`<sup>→ P. 413</sup> or `/tcb/pad at break*`<sup>→ P. 413</sup>.

```
% The following setting hinders orphan lines for the last partial box
\tcbset{enlargepage flexible=\baselineskip}
```

N 2014-12-15

`/tcb/compress page=<option>` (default `all`, initially `baselineskip`)

This option controls the space management on the page which contains the unbroken box or the first part of a *break sequence*. Feasible  $\langle option \rangle$  values are:

- `all` (default value): All shrinkable glue on the page is potentially used for the unbroken box or the first part of a *break sequence*. Thus, all vertical spaces on the page will potentially be reduced to their minimal values.
- `baselineskip` (initial value): Shrinkable glue up to one `\baselineskip` on the page is potentially used for the unbroken box or the first part of a *break sequence*.
- `none`: The break algorithm respects the target size of the given glue values on the page. This was the initial value before version 3.34.



Note that the box *content* is not influenced by this option.

`/tcb/shrink break goal=<length>` (no default, initially `0pt`)

This is an emergency parameter if the break algorithm produces unpleasant breaks. It shrinks the goal height of the current box part by  $\langle length \rangle$  which may result in smaller boxes. Never use negative values. *Usually, this option will never be needed at all.*

N 2020-10-09

`/tcb/use color stack=true|false` (default `true`, initially `false`)

Depending on the L<sup>A</sup>T<sub>E</sub>X engine and loaded packages, if your text contains some color changing commands, your color may not survive the break to the next box. For some engines, there is support for additional color stacks which allow colors to survive breaks. Such an color stack can be activated by `/tcb/use color stack` with help of the `pdfcol`<sup>→ CTAN</sup> package. This can be done globally or per box.



Note that activating `/tcb/use color stack` inserts a color command with a *whatsit* at the begin of the upper part and of the lower part of a `tcolorbox`<sup>→ P. 12</sup>. This *may* add additional vertical space, e.g. if your box text starts with a list like `enumerate`!

- pdfT<sub>E</sub>X: color stacks supported.
- LuaT<sub>E</sub>X: color stacks supported, but you should consider loading the `luacolor`<sup>→ CTAN</sup> package *instead* which avoids the spacing problem.
- XeT<sub>E</sub>X: color stacks not supported (yet?). From hearsay, with the `fontspec`<sup>→ CTAN</sup> package, you may use `\addfontfeatures{Color=mycolor}` to add a font color which survives the break.

If `pdfcol` cannot initialize an additional color stack for the used engine, `/tcb/use color stack` is silently ignored.

The result of the following example depends on the used L<sup>A</sup>T<sub>E</sub>X engine and loaded packages. The right-hand side is blue, if compiled using pdfT<sub>E</sub>X, Lu<sub>A</sub>T<sub>E</sub>X without luacolor, and XeT<sub>E</sub>X. Lu<sub>A</sub>T<sub>E</sub>X with luacolor gives the next but one result.

```
% \usepackage{multicol, lipsum}
\begin{multicols}{2}\footnotesize
Breakable box without color stack.
\begin{tcolorbox}[enhanced jigsaw,
size=small, colframe=gray, colback=yellow!10!white, colupper=blue,
enforce breakable,% use only breakable in the real world!
vfill before first, pad at break=1mm, break at=33mm ]
Some blue text.\par\smallskip
{\color{red}\itshape\lipsum[2]}\par\smallskip
More blue text.
\end{tcolorbox}
Text after box.
\end{multicols}
```

Breakable box without color stack.

Some blue text.

*Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspen-*

*disse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.*

More blue text.

Text after box.

We do again with `/tcb/use color stack`<sup>→ P. 411</sup>. Again, the result depends on the used L<sup>A</sup>T<sub>E</sub>X engine. The right-hand side stays blue for XeT<sub>E</sub>X and is red and blue for pdfT<sub>E</sub>X and Lu<sub>A</sub>T<sub>E</sub>X.

```
% \usepackage{multicol, lipsum}
\begin{multicols}{2}\footnotesize
Breakable box with color stack.
\begin{tcolorbox}[enhanced jigsaw, use color stack,
size=small, colframe=gray, colback=yellow!10!white, colupper=blue,
enforce breakable,% use only breakable in the real world!
vfill before first, pad at break=1mm, break at=33mm ]
Some blue text.\par\smallskip
{\color{red}\itshape\lipsum[2]}\par\smallskip
More blue text.
\end{tcolorbox}
Text after box.
\end{multicols}
```

Breakable box with color stack.

Some blue text.

*Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspen-*

*disse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.*

More blue text.

Text after box.

## 19.4 Option Keys for the Break Appearance

**/tcb/toprule at break=***<length>* (no default, initially 0.5mm)

Sets the line width of the top rule to *<length>* if the box is **/tcb/breakable**<sup>→ P. 408</sup>. In this case, it is applied to *middle* and *last* parts in a break sequence. Note that **/tcb/toprule**<sup>→ P. 42</sup> overwrites this value if used afterwards.

**/tcb/bottomrule at break=***<length>* (no default, initially 0.5mm)

Sets the line width of the bottom rule to *<length>* if the box is **/tcb/breakable**<sup>→ P. 408</sup>. In this case, it is applied to *first* and *middle* parts in a break sequence. Note that **/tcb/bottomrule**<sup>→ P. 42</sup> overwrites this value if used afterwards.

**/tcb/topsep at break=***<length>* (no default, initially 0mm)

Additional vertical space of *<length>* which is added at the top of *middle* and *last* parts in a break sequence. In general, it is not advisable to change this value if these parts start with a rule or a title.

**/tcb/bottomsep at break=***<length>* (no default, initially 0mm)

Additional vertical space of *<length>* which is added at the bottom of *first* and *middle* parts in a break sequence. In general, it is not advisable to change this value if these parts end with a rule.

**/tcb/pad before break=***<length>* (style, no default, initially 3.5mm)

Sets the total amount of vertical space after the text content and before the break point to *<length>*. This style sets **/tcb/toprule at break** to 0pt and changes **/tcb/topsep at break** as required. In general, it is not advisable to change this value if the *middle* and *last* parts in a break sequence start with a rule or a title.

**/tcb/pad before break\*=***<length>* (style, no default)

Sets **/tcb/pad before break** to *<length>* and **/tcb/enlargepage flexible**<sup>→ P. 411</sup> to an appropriate value such that empty closing frames are avoided.

**/tcb/pad after break=***<length>* (style, no default, initially 3.5mm)

Sets the total amount of vertical space after the break point and before the text content to *<length>*. This style sets **/tcb/bottomrule at break** to 0pt and changes **/tcb/bottomsep at break** as required. In general, it is not advisable to change this value if the *first* and *middle* parts in a break sequence end with a rule.

**/tcb/pad at break=***<length>* (style, no default, initially 3.5mm)

Abbreviation for setting *<length>* to **/tcb/pad before break** and **/tcb/pad after break**.

**/tcb/pad at break\*=***<length>* (style, no default)

Sets **/tcb/pad at break** to *<length>* and **/tcb/enlargepage flexible**<sup>→ P. 411</sup> to an appropriate value such that empty closing frames are avoided.

```
% \usepackage{lipsum} % preamble
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced jigsaw,breakable,pad at break*=0mm,
  title={For this box, the pad space at the break point is set to 0mm}]
  \lipsum[1-2]
\end{tcolorbox}
```

For this box, the pad space at the break point is set to 0mm

Lore ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis

egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

! /tcb/pad at break<sup>→ P. 413</sup> or /tcb/pad at break\*<sup>→ P. 413</sup> should be used as very last option in an option list, because they adapt other settings.

! Also see /tcb/enlarge top at break by<sup>→ P. 98</sup> and /tcb/enlarge bottom at break by<sup>→ P. 98</sup>.

**/tcb/height fixed for=⟨part⟩** (no default, initially none)

When certain amount of space is available for a partial box of a break sequence, the partial box typically is smaller than this space (depending on the box content). For given ⟨part⟩(s), the height can be set to all available space.

- **none**: Every partial `tcolorbox` is set with its natural height.
- **first**: The *first* partial box is set to a height which matches the available space.
- **middle**: All *middle* partial boxes are set to a height which matches the available space.
- **last**: The *last* partial box is set to a height which matches the available space.
- **first and middle**: The *first* and all *middle* partial boxes are set to a height which matches the available space.
- **middle and last**: All *middle* partial boxes and the *last* partial box are set to a height which matches the available space.
- **all**: All partial boxes are set to a height which matches the available space.

! If the box keeps unbroken, this option is not applied. See /tcb/height<sup>→ P. 60</sup> for setting a fixed height for unbroken boxes. See /tcb/height fill<sup>→ P. 63</sup> for giving unbroken boxes maximum height.

**/tcb/vfill before first=true|false** (default true, initially false)

Inserts a `\vfill` at the begin of the *first* partial box to move this partial box to the end of the current page. This may be used as an alternative to /tcb/height fixed for=**first** to get justified columns or pages. The `\vfill` is not inserted, if the box gets not actually broken.

N 2017-03-20 **/tcb/segmentation at break=true|false** (default true, initially true)

If a breakable box contains an *upper part* and a *lower part* and the break happens at the *segmentation* between both parts, then

- the segmentation line (or similar) is drawn as first element of the partial box containing the *lower part*, if /tcb/segmentation at break is set to be **true**.
- the segmentation line (or similar) is not drawn at all, if /tcb/segmentation at break is set to be **false**. This may be preferable for skins like `bicolor`<sup>→ P. 247</sup>, `tile`<sup>→ P. 258</sup>, or `beamer`<sup>→ P. 262</sup>.

## 19.5 Extra Options for Partial Boxes

N 2015-07-16 `/tcb/extras={⟨options⟩}` (no default, initially unset)

Adds `tcolorbox` `⟨options⟩` to every box of a *break sequence* after skin settings are done. This is quite late in box processing. Geometry and break settings should *not be used* here, because they will either be ignored or have unexpected negative results. But it is possible to change most colors, skin effects, shadows, borders, frame code, etc. Note that using `/tcb/extras` for every box is very seldom an advantage over setting the options directly. Usually, `/tcb/extras first`, `/tcb/extras middle`, etc. are sensible to apply.

N 2015-07-16 `/tcb/no extras` (style, no default, initially set)

Removes all extras if set before.

N 2015-07-16 `/tcb/extras broken={⟨options⟩}` (no default, initially unset)

If the box is set to be `/tcb/breakable`<sup>→ P. 408</sup> and *is* broken actually, then the `⟨options⟩` are added to every box of the *break sequence*. `/tcb/extras` overwrites this key.

N 2015-07-16 `/tcb/extras unbroken={⟨options⟩}` (no default, initially unset)

If the box is set to be `/tcb/breakable`<sup>→ P. 408</sup> but *is not* broken actually or if the box is set to be `/tcb/unbreakable`<sup>→ P. 409</sup>, then the `⟨options⟩` are added to the box. `/tcb/extras` overwrites this key.

N 2015-07-16 `/tcb/no extras unbroken` (style, no default, initially set)

Removes the unbroken extras if set before.

N 2015-07-16 `/tcb/extras first={⟨options⟩}` (no default, initially unset)

If the box is set to be `/tcb/breakable`<sup>→ P. 408</sup> and *is* broken actually, then the `⟨options⟩` are added to the *first* box of the break sequence. `/tcb/extras` overwrites this key.

N 2015-07-16 `/tcb/no extras first` (style, no default, initially set)

Removes the first extras if set before.

N 2015-07-16 `/tcb/extras middle={⟨options⟩}` (no default, initially unset)

If the box is set to be `/tcb/breakable`<sup>→ P. 408</sup> and *is* broken actually, then the `⟨options⟩` are added to every *middle* box (if any) of the break sequence. `/tcb/extras` overwrites this key.

N 2015-07-16 `/tcb/no extras middle` (style, no default, initially set)

Removes the middle extras if set before.

N 2015-07-16 `/tcb/extras last={⟨options⟩}` (no default, initially unset)

If the box is set to be `/tcb/breakable`<sup>→ P. 408</sup> and *is* broken actually, then the `⟨options⟩` are added to the *last* box of the break sequence. `/tcb/extras` overwrites this key.

N 2015-07-16 `/tcb/no extras last` (style, no default, initially set)

Removes the last extras if set before.

N 2015-07-16 `/tcb/extras unbroken and first={⟨options⟩}` (no default, initially unset)

This is an abbreviation for setting `/tcb/extras unbroken` and `/tcb/extras first` together. `/tcb/extras` overwrites this key.

N 2015-07-16 `/tcb/extras middle and last={⟨options⟩}` (no default, initially unset)

This is an abbreviation for setting `/tcb/extras middle` and `/tcb/extras last` together. `/tcb/extras` overwrites this key.

N 2015-07-16 `/tcb/extras unbroken and last={⟨options⟩}` (no default, initially unset)

This is an abbreviation for setting `/tcb/extras unbroken` and `/tcb/extras last` together. `/tcb/extras` overwrites this key.

N 2015-07-16	<b>/tcb/extras first and middle</b> ={<options>}	(no default, initially unset)
	This is an abbreviation for setting <code>/tcb/extras first</code> <sup>→ P. 415</sup> and <code>/tcb/extras middle</code> <sup>→ P. 415</sup> together. <code>/tcb/extras</code> <sup>→ P. 415</sup> overwrites this key.	
N 2018-07-26	<b>/tcb/extras title after break</b> ={<options>}	(no default, initially unset)
	If the box has a <code>/tcb/title after break</code> <sup>→ P. 409</sup> , then the <options> are added for all titles after the first break, i.e. all middle and last. The color, font, and alignment of titles after break can be adapted choosing <options>, e.g. by <code>/tcb/coltitle</code> <sup>→ P. 35</sup> , <code>/tcb/fonttitle</code> <sup>→ P. 36</sup> , <code>/tcb/halign title</code> <sup>→ P. 39</sup> . Note that <code>/tcb/colbacktitle</code> <sup>→ P. 34</sup> has to be placed into <code>/tcb/extras middle and last</code> <sup>→ P. 415</sup> .	

N 2018-07-26	<b>/tcb/no extras title after break</b>	(style, no default, initially set)
	Removes the title after break extras if set before.	

```
% \usepackage{lipsum,multicol}
% \usetikzlibrary{decorations.pathmorphing}
% \tcbuselibrary{skins}
\newtcolorbox{mybox}[1][]{%
    tile,
    colback=green!7,coltitle=blue!50!black,colbacktitle=blue!5,
    center title,
    toprule=1.25mm,bottomrule=1.25mm,
    extras unbroken and first={%
        borderline north={0.25mm}{0.5mm}{blue},decoration={zigzag,amplitude=0.5mm},decorate},
    extras unbroken and last={%
        borderline south={0.25mm}{0.5mm}{blue},decoration={zigzag,amplitude=0.5mm},decorate},
    #1
}

\begin{mybox}[title=My unbroken box]
\lipsum[1]
\end{mybox}

\begin{multicols}{3}
\begin{mybox}[title=My broken box,
    enforce breakable,% use only breakable in the real world!
    break at=4.2cm,pad at break=2mm,
    height fixed for=first and middle, ]
\lipsum[2]
\end{mybox}
\end{multicols}
```

### My unbroken box

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### My broken box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan

bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus

mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

## 19.6 Breakable boxes and the `multicol` package

! With version 4.10, the algorithm for detecting the available height for a `tcolorbox` inside a `multicol` environment was improved with help of Frank Mittelbach. This change *may* impact existing user code which *may* have to be adapted.

Unbreakable `tcolorboxes` can be used without special care inside a `multicols` environment from the `multicol`<sup>→ CTAN</sup> package [9]. Since version 3.10, a breakable `tcolorbox` detects, if it is used inside a `multicols` environment. But choosing break points

for a breakable box cannot be done by the balancing routine of `multicols`. By default, boxes will break at maximum column height. To get pleasant results, use the `/tcb/break at`<sup>→ P. 410</sup> and `/tcb/height fixed for`<sup>→ P. 414</sup> options.

```
% \usepackage{lipsum,multicol} % preamble
\footnotesize
\begin{multicols}{2}
    \lipsum[1]
    \begin{tcolorbox}[enhanced jigsaw,breakable,size=title,
        colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
        title=My breakable box,pad at break=1mm, break at=-\baselineskip/0pt ]
        \lipsum[2-4]
    \end{tcolorbox}
    \lipsum[4]
\end{multicols}
```

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### My breakable box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris. Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy

pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

This example is already set inside a `multicols` environment. This time, a *middle* part has full column height (here `\textheight`). `/tcb/height fixed for^P.414` is used to spread this box part over the full height to align with neighboring columns.

```
% \usepackage{lipsum,multicol}
\lipsum[1]
\begin{tcolorbox}[enhanced jigsaw,
  breakable,
  size=title,
  colback=red!5!white,
  colframe=red!75!black,
  fonttitle=\bfseries,
  title=My breakable box,
  pad at break=2mm,
  break at=-\baselineskip/Opt,
  height fixed for=middle ]
\lipsum[2-7]
\end{tcolorbox}
\lipsum[8]
```

Lore ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

## My breakable box

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis.

Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi

quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas

sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consectetuer at, consectetuer sed, eleifend ac, lectus. Nulla facilisi. Pellentesque eget lectus. Proin eu metus. Sed porttitor. In hac habitasse platea dictumst. Suspendisse eu lectus. Ut mi mi, lacinia sit amet, placerat et, mollis vitae, dui. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, dui. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, dui.

The following example has a `\tcolorbox` which fills the `\multicols` environment completely. Here, `/tcb/height fixed for`<sup>→ P. 414</sup> is used to give all three columns the full height. Note that the appropriate `/tcb/break at`<sup>→ P. 410</sup> value is not computed automatically but set manually.

```
% \usepackage{lipsum,multicol} % preamble
\small
\begin{multicols}{3}
\begin{tcolorbox}[enhanced jigsaw,breakable,size=small,
colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
title=My breakable box,pad at break=2mm,drop fuzzy shadow,
height fixed for=all, break at=11.4cm ]
\lipsum[1-3]
\end{tcolorbox}
\end{multicols}
```

### My breakable box

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravia mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auc-

tor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

## 19.7 Break Point Insertion

N 2017-07-05

### \tcbbreak

A *breakable* box is not broken, if there is enough space on the current page or column. Therefore, typical penalty insertion with \break, \pagebreak, \columnbreak, ... may only work as expected, if the box is broken at least into two parts *without* inserting the penalties.

To *force* a page or column break, \tcbbreak starts a new paragraph and inserts an insane tall rule which causes a break and which is immediately discarded. You may ignore this technical information and just use it as you would use \pagebreak.

For an *unbreakable box*, \tcbbreak is identical to insert \par, i.e. it just starts a new paragraph.

Also see /tcb/break at <sup>→ P. 410</sup> for defining height dependent breaks.

```
% \usepackage{lipsum,multicol} % preamble
\begin{multicols}{3}
  \begin{tcolorbox}[breakable,enhanced jigsaw,size=small,
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    title=Break into parts
  ]
  First part\tcbbreak
  Second part\tcbbreak
  Third part
  \end{tcolorbox}
\end{multicols}

\begin{multicols}{3}
  \begin{tcolorbox}[enhanced jigsaw,size=small,
    colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
    title=You shall not break
  ]
  First part\tcbbreak
  Second part\tcbbreak
  Third part
  \end{tcolorbox}
\end{multicols}
```

#### Break into parts

First part

#### Second part


#### Third part


#### You shall not break


First part  
Second part  
Third part

## 19.8 Break Sequence for the Skins

The following diagrams document the *break sequence* for different skins. Depending on the main skin of a `tcolorbox`, the actual skins of the *break sequence* parts are displayed.

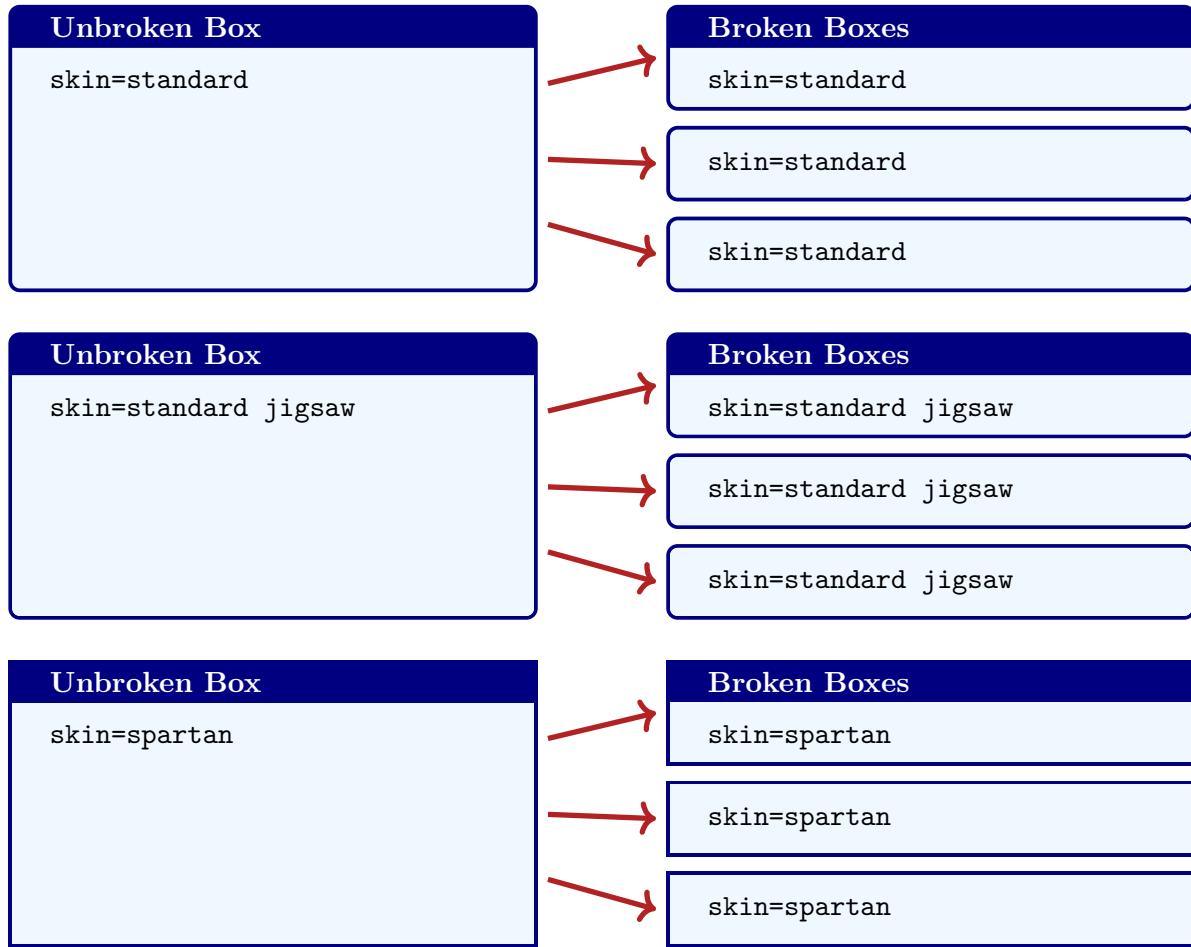

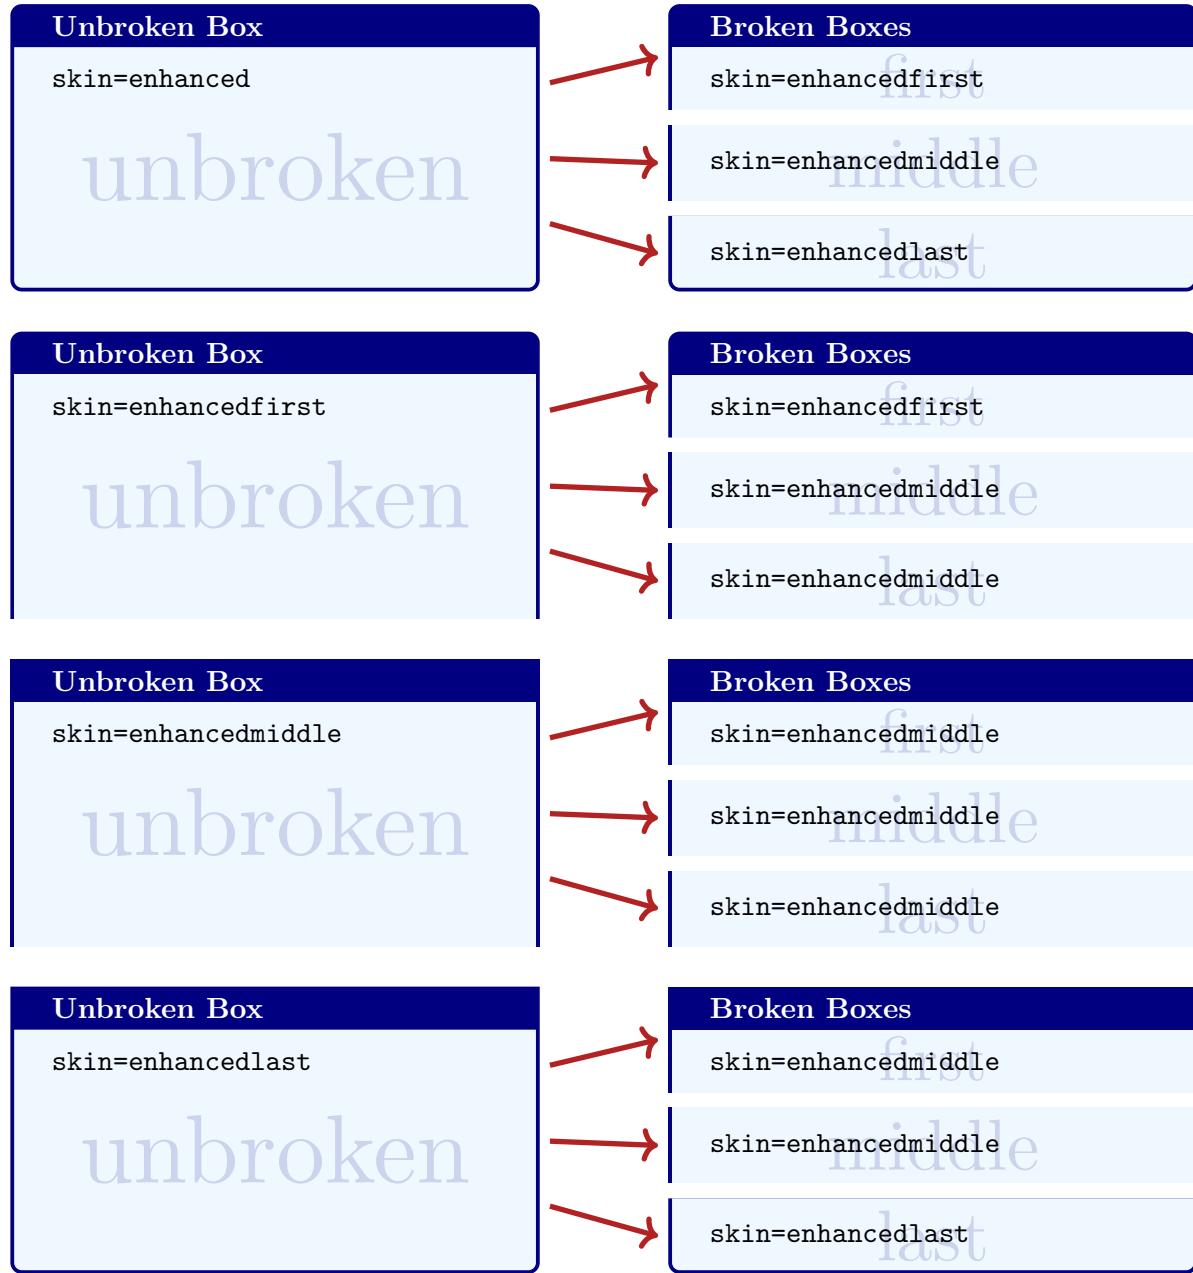

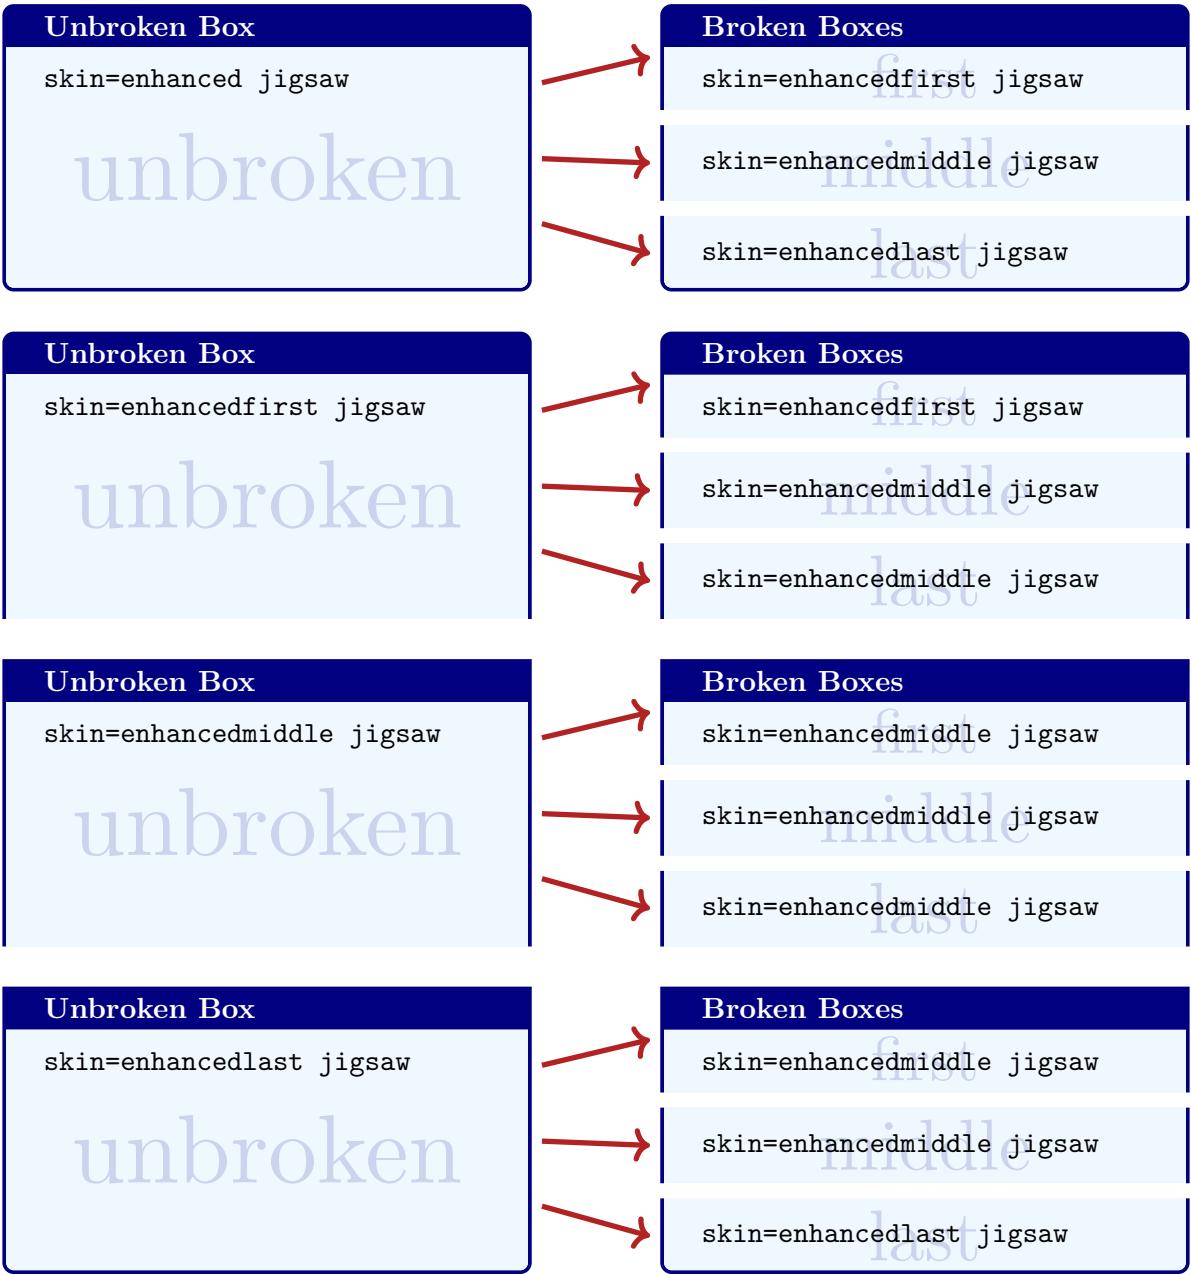

skin=empty

unbroken



skin=emptyfirst

middle  
last

skin=emptyfirst

unbroken



skin=emptyfirst

middle  
last

skin=emptymiddle

unbroken



skin=emptymiddle

middle  
last


skin=emptylast


unbroken




skin=emptylast


middle  
last




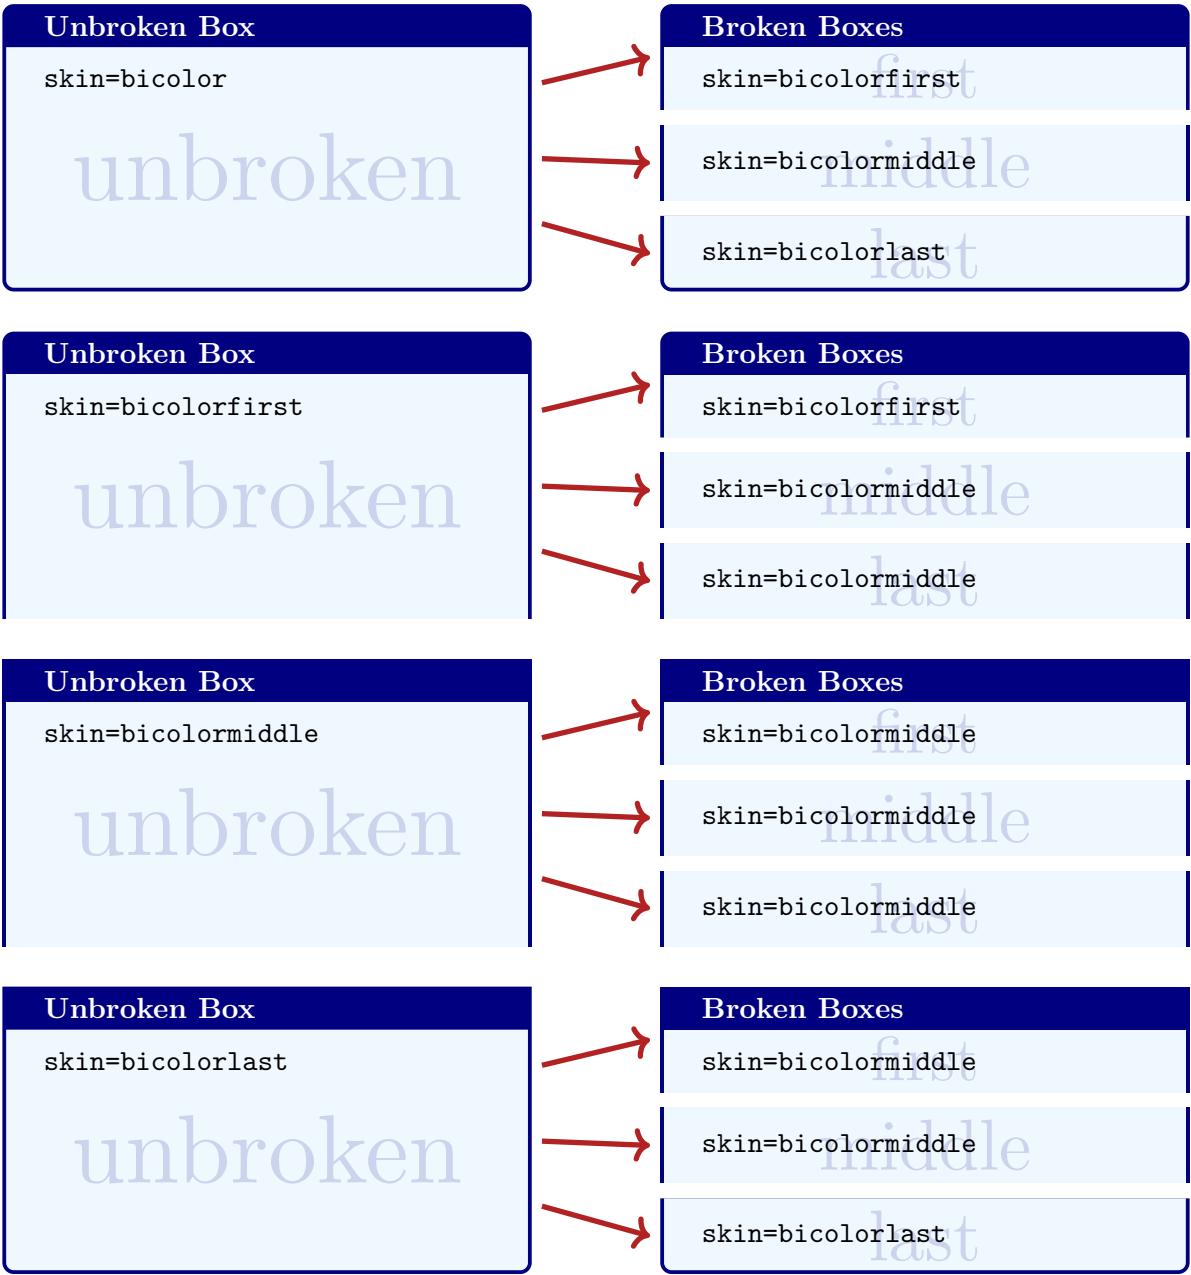


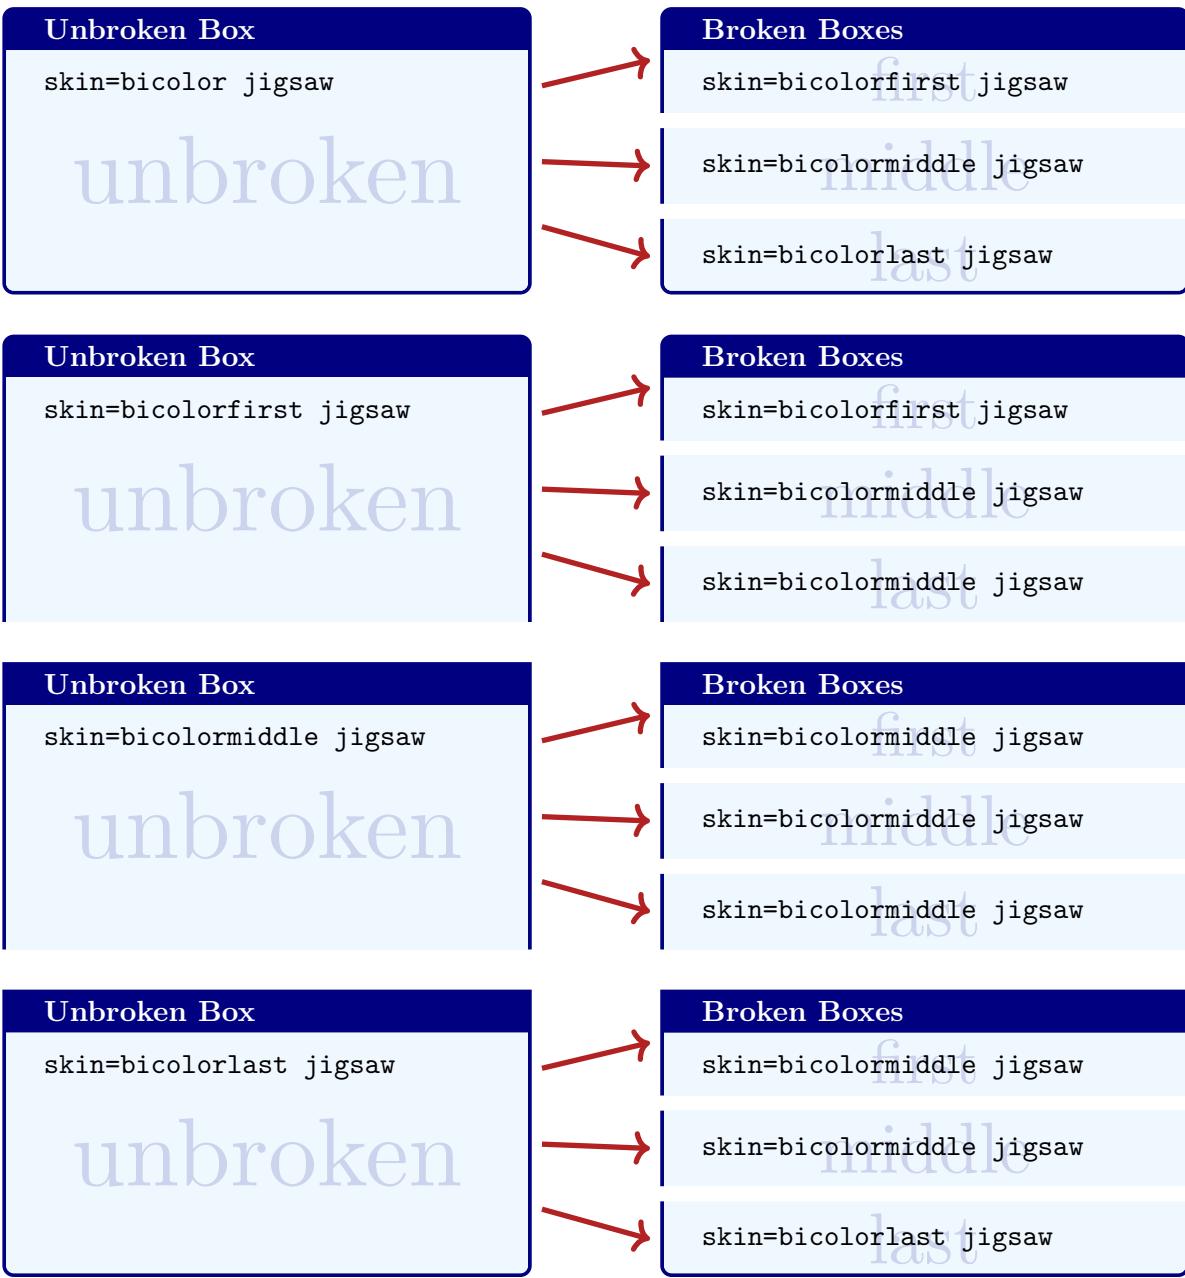

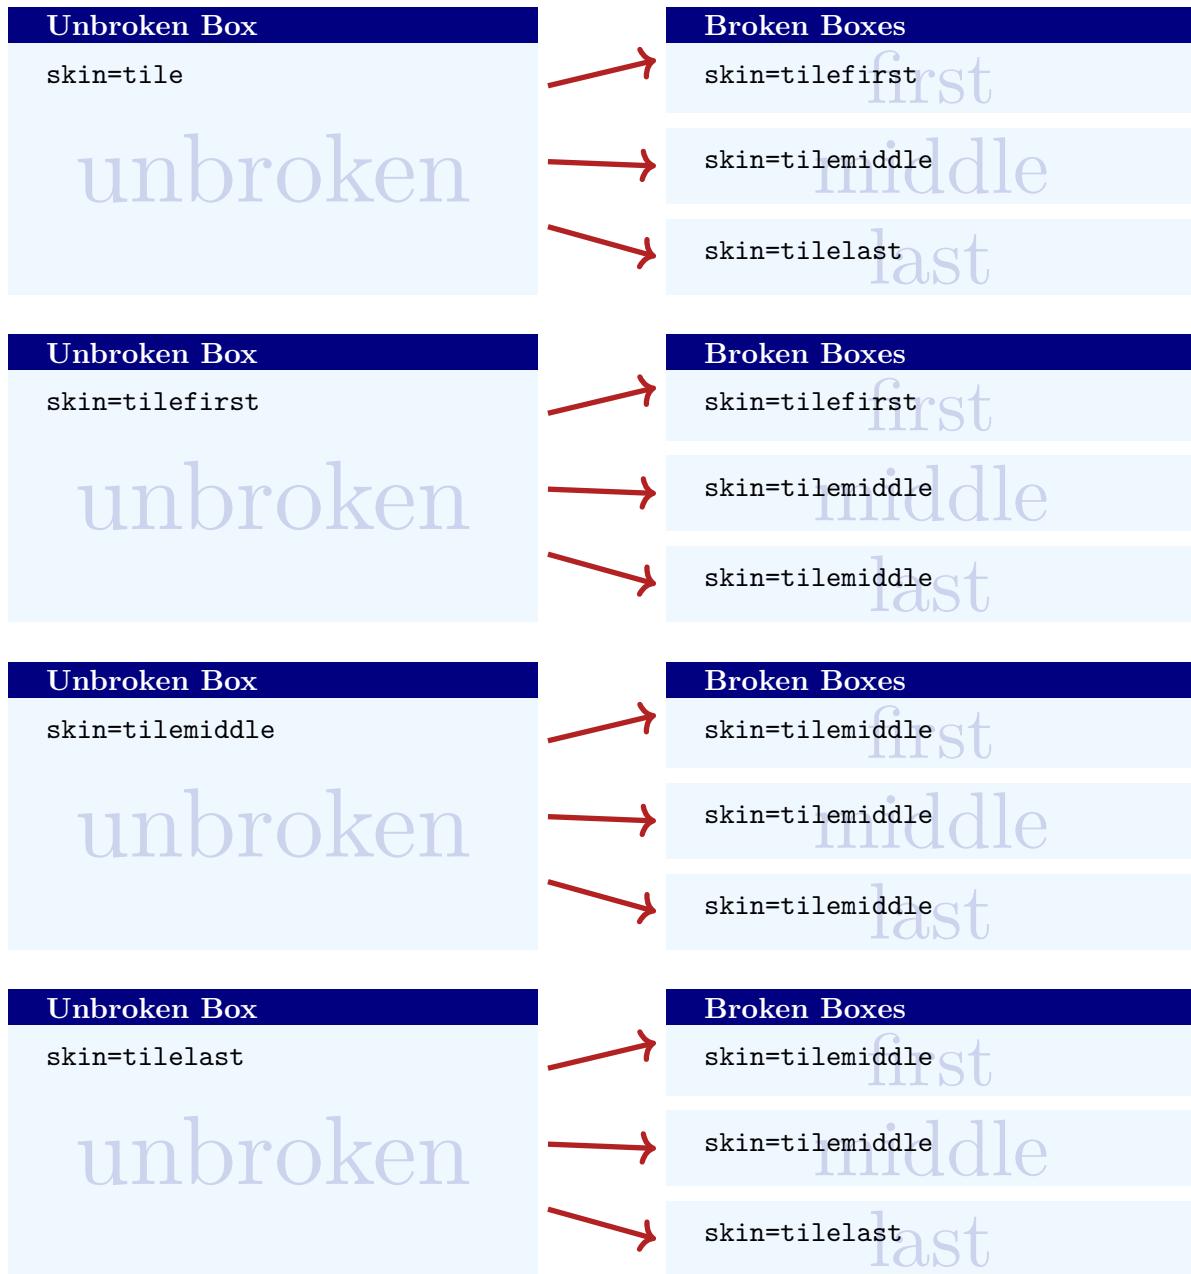



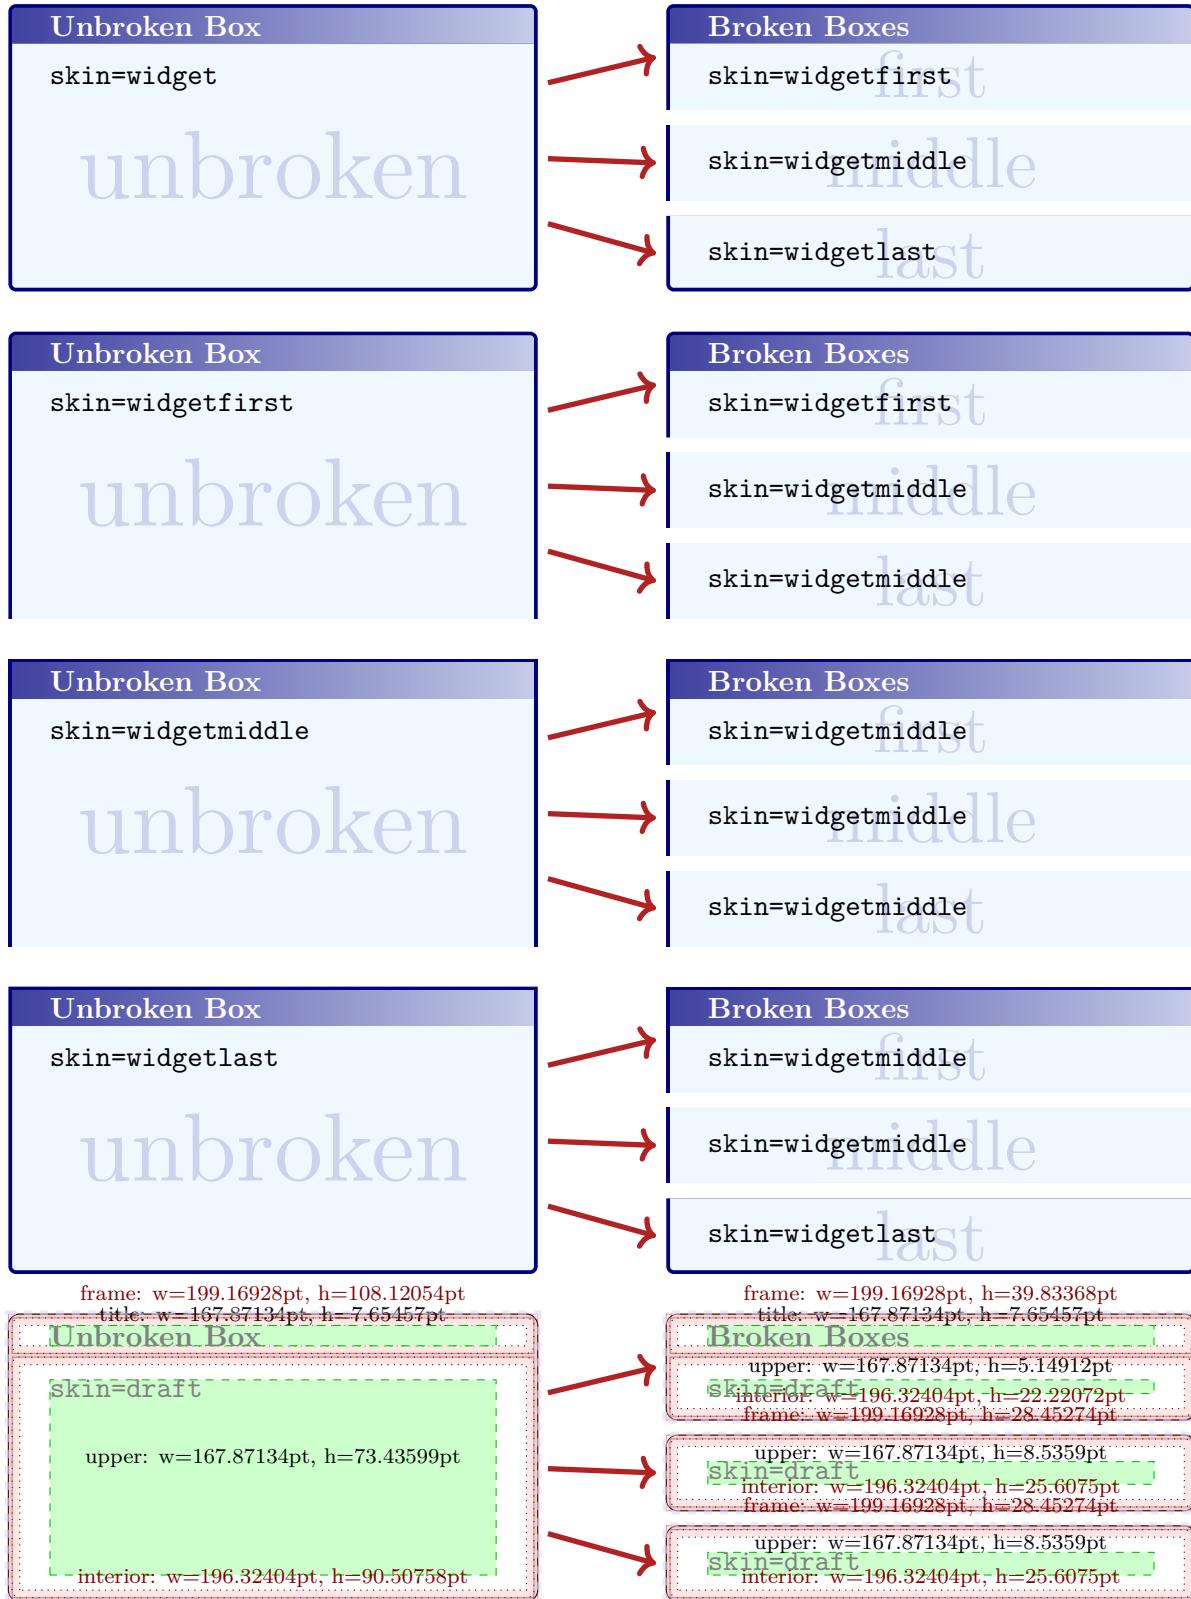

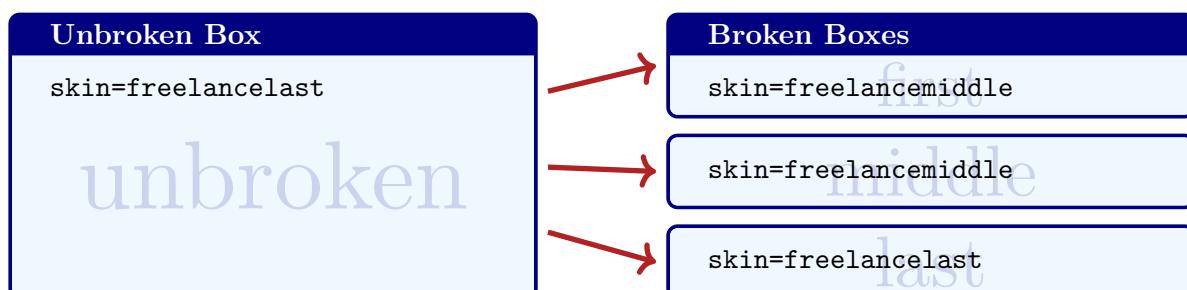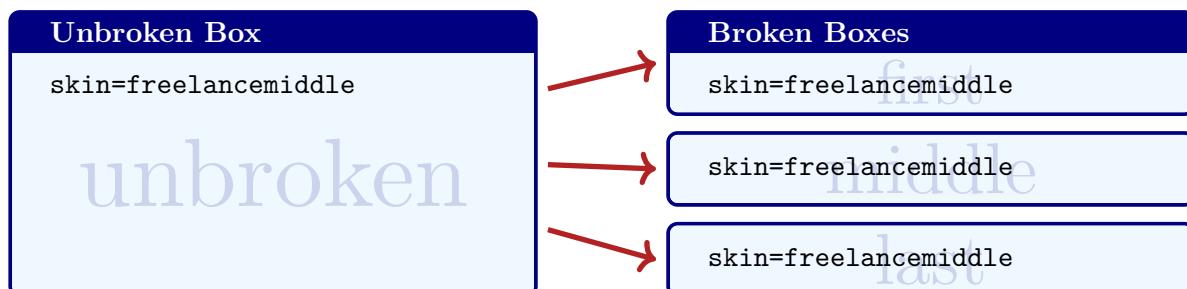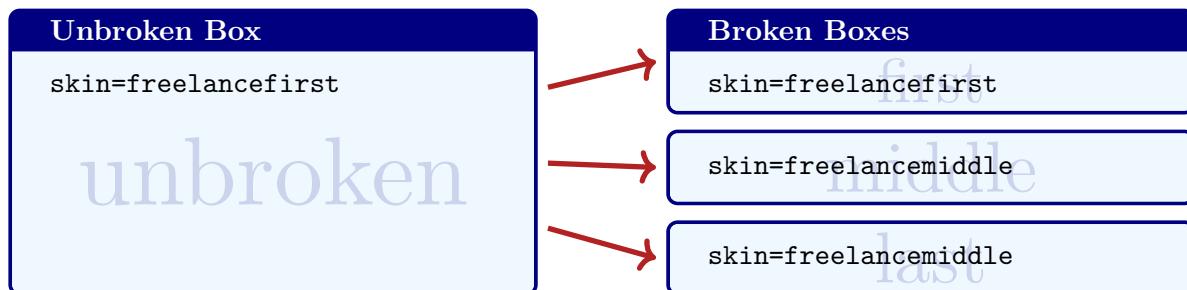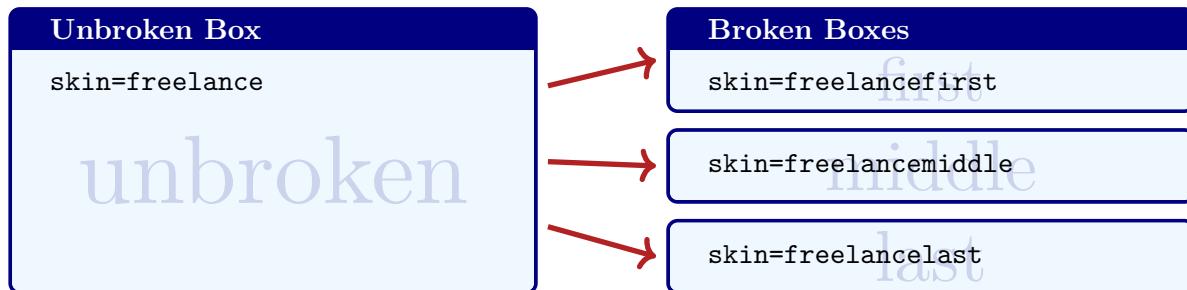

## 19.9 Break by Hand (Faked Break)

! See 19.6 on page 418 for *real* column breaks.

Since the appearance of broken boxes is done by skins, it is quite easy to 'fake a break'. For this, you actually don't need the `tikz` `breakable` library at all.

```
\tcbset{enhanced,equal height group=fakedbreak,
  colback=LightGreen,colframe=DarkGreen,
  width=(\linewidth-6mm)/3,nobeforeafter,
  left=1mm,right=1mm,top=1mm,bottom=1mm,middle=1mm}
%
\begin{tcolorbox}[title=My broken box,skin=enhancedfirst]
This is a box which breaks from one column to another
\end{tcolorbox}\hfill
\begin{tcolorbox}[skin=enhancedmiddle]
column. I am sorry to say that this is a trick.
Nevertheless, you may use this trick for your
\end{tcolorbox}\hfill
\begin{tcolorbox}[skin=enhancedlast]
own purposes.
\end{tcolorbox}
```

My broken box

This is a box which breaks  
from one column to another

column. I am sorry to say that  
this is a trick. Nevertheless,  
you may use this trick for your

own purposes.

The main purpose of this library is to store a `tcolorbox` into an array of box registers for later usage.

If the `tcolorbox` is not breakable, there is not much add-on compared to usual TeX/LaTeX box storage and usage (and you do not really need this library for that use case). For a breakable `tcolorbox`, this library allows to capture all partial boxes into a sequence of registers. The partial boxes can be used anywhere in arbitrary order.

The name of this library indicates *magazine* in the sense of storage, but also in the sense of a journal where an article often is *continued on page x*. An example for this kind of application is given throughout this section starting on the right hand side. The creation of this library was motivated by Ulrike Fischer and Steven B. Segletes.

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{magazine}
```

This also loads the library  `breakable`, see Section 19 on page 406.

**!** The box register operations of this library are global. TeX grouping will not clear the registers when leaving the current group. Also be aware that extensive use of large box arrays may eat up TeX's available memory and registers.

### 20.1 Creation and Resetting of Box Arrays

N 2015-07-13

`\newboxarray{<name>}`

This creates a new box array called `<name>`. There already is a box array available with name `default` which can be used directly. Note that the creation is a global operation.

```
\newboxarray{myarray}
```

N 2015-07-13

`\boxarrayreset[<name>]`

Resets the size counter of a box array `<name>` to zero. If `<name>` is not provided, `default` is used as name. Use this or `/tcb/reset box array` before you apply `/tcb/store to box array`<sup>P. 434</sup>. Otherwise, all boxes would be appended to the already existing boxes. This command does not clear box registers.

```
\boxarrayreset          % resets 'default'  
\boxarrayreset{myarray} % resets 'myarray'
```

N 2015-07-13

`/tcb/reset box array=<name>`

(default `default`, initially unset)

Resets the size counter of a box array `<name>` to zero. Use this or `\boxarrayreset` (which does the same) before you apply `/tcb/store to box array`<sup>P. 434</sup>.

```
\tcbset{  
    reset box array,           % resets 'default'  
    reset box array=myarray, % resets 'myarray'  
}
```

### Example Article

This is an example for an article which starts right here and is continued to the following pages. The body text for the article is written inside a single `tcolorbox`. This box is split into parts using the tools from this section,

— *continued on page 436* —

## \boxarrayclear[⟨name⟩]

Works like `\boxarrayreset`<sup>→ P. 433</sup> to reset the size counter of a box array `⟨name⟩` to zero. Additionally, all allocated box registers of the box array are cleared of their content. Note that the allocated box registers stay allocated. So, this may be useful to clear memory, but not to free registers for other applications. If `\consumeboxarray`<sup>→ P. 437</sup> or `\consumetboxarray`<sup>→ P. 437</sup> was used to apply the stored boxes, there is no advantage in using `\boxarrayclear`.

```
\boxarrayclear           % clears `default'
\boxarrayclear{myarray} % clears `myarray'
```

## 20.2 Storing Content

## /tcb/store to box array=⟨name⟩


(default `default`, initially unset)

Stores a `tcolorbox` or all parts of a break sequence of a `tcolorbox` into a box array `⟨name⟩`. If no `⟨name⟩` is given, the already existing `default` box array is used. Otherwise, the box array has to be created beforehand with `\newboxarray`<sup>→ P. 433</sup>. Note that the box has to be `/tcb/breakable`<sup>→ P. 408</sup>, if the box shall break into several parts. Typically, manual break points are additionally defined by `/tcb/break at`<sup>→ P. 410</sup>. Otherwise, the box parts will have a length of about `\textheight`. For most use cases, a `/tcb/reset box array`<sup>→ P. 433</sup> should be applied to reset the box array counter.

```
% \usepackage{lipsum}
\begin{tcolorbox}[enhanced jigsaw, size=fbox, width=4cm,
  colback=yellow!10, colframe=yellow!10!black,
  enforce breakable, % use only breakable in the real world!
  break at=7cm/4cm,
  height fixed for=all,
  watermark text=\arabic{tcbbreakpart},
  reset box array,
  store to box array
]
\lipsum[1]
\end{tcolorbox}

\useboxarray{1}\hfill
\begin{tabular}{b}{cc}
\multicolumn{2}{c}{\includegraphics[width=7cm]{Basilica_5.png}}\\
\useboxarray{2} & \useboxarray{3}
\end{tabular}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla

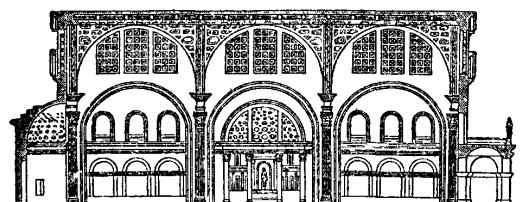

et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, male-

suada eu, pulvinar at, molllis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim ruttum.

If the first box part should fill the rest of the available space of the current page, you can use `\pagegoal-\pagetotal` minus some distance for the first element of `/tcb/break at→ P. 410`. You may want to have some additional distance to the preceding text.


```
% \usepackage{lipsum}
\begin{tcolorbox}[enhanced,breakable,
  reset box array,
  store to box array,
  break at=\pagegoal-\pagetotal-5mm/0pt,
  height fixed for=first and middle]
\lipsum[1-15]
\end{tcolorbox}%
%
\consumetoboxarray{1}{blanker,before=\par\vfill\noindent}
```

```
\begin{tcolorbox}[blanker,width=4cm,
  fontupper=\footnotesize,
  enforce breakable,% use only breakable in the real world!
  break at=4cm,
  height fixed for=all,
  watermark text=\arabic{tcbbreakpart},
  reset box array,
  store to box array
]
\includegraphics[width=\linewidth]{Basilica_5.png}\par
\lipsum[1-2]
\end{tcolorbox}

\begin{tcblitemize}[raster columns=3,raster equal height,
  size=small,halign=center,sharp corners,colback=blue!5]
\tcblitem\consumeboxarray{5}
\tcblitem\consumeboxarray{6}
\tcblitem\consumeboxarray{1}
\tcblitem\consumeboxarray{2}
\tcblitem\consumeboxarray{3}
\tcblitem\consumeboxarray{4}
\end{tcblitemize}
```

bero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque

penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.



Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam

arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum

urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur

auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum. Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus li-

N 2015-07-13 `/tcb/reset and store to box array=<name>` (style, default `default`, initially unset)

Combination of `/tcb/reset box array`<sup>P. 433</sup> and `/tcb/store to box array`<sup>P. 434</sup>.

N 2015-07-13 `/tcb/do not store to box array` (style, no default, initially set)

Disables the `/tcb/store to box array`<sup>P. 434</sup> option, if set before.

N 2015-07-13 `\begin{boxarraystore}{<name>}`  
*<environment content>*  
`\end{boxarraystore}`

Stores the environment content into a box array `<name>`. This corresponds to the standard L<sup>A</sup>T<sub>E</sub>X environment `lrbox`, but the storage operation is global. As long as `\boxarrayreset`<sup>P. 433</sup> is not used, every new `boxarraystore` adds a further box to the array.

```
\boxarrayreset
\begin{boxarraystore}{default}\fbox{Mary}\end{boxarraystore}
\begin{boxarraystore}{default}\fbox{Had}\end{boxarraystore}
\begin{boxarraystore}{default}\fbox{a}\end{boxarraystore}
\begin{boxarraystore}{default}\fbox{Little}\end{boxarraystore}
\begin{boxarraystore}{default}\fbox{Lamb}\end{boxarraystore}
\useboxarray{5}\useboxarray{4}\useboxarray{3}\useboxarray{2}\useboxarray{1}\hfill
\useboxarray{1}\useboxarray{5}
```

Mary Lamb Little a Had

Mary Lamb

### 20.3 Retrieving Content

N 2015-07-13 `\boxarraygetsize[<name>]{<macro>}`

Stores the current size of a box array `<name>` into a given `<macro>`. If no `<name>` is given, the already existing `default` box array is used.

```
\boxarraygetsize{\mysize}
Current size of the default box array:
\mysize.
```

Current size of the default box array: 5.

— continued from page 433 —  
namely `/tcb/reset and store to box array`<sup>P. 436</sup> with a new box array `myarticle` which was created by `\newboxarray{myarticle}`.

The resulting parts are distributed throughout this Section 20 on page 433 using `\consumetboxarray`<sup>P. 437</sup> at

— continued on page 437 —

N 2015-07-13 `\useboxarray[<name>]{<index>}`

Typesets the box with the given `<index>` number from the box array `<name>`. If no `<name>` is given, the already existing `default` box array is used. It is considered an error, if a not existing box array `<name>` is used. It is silently ignored, if the `<index>` is out of range. Note that `\useboxarray` corresponds to the standard `\usebox` macro, respectively, `\copy`.

```
\boxarraygetsize{\mysize}
\foreach \n in {1,...,\mysize} { \useboxarray{\n} }
```

Mary Lamb Little a Had

### \usetcbarray[⟨name⟩]{⟨index⟩}{⟨options⟩}

Typesets the box with the given ⟨index⟩ number from the box array ⟨name⟩ using `\useboxarray→ P. 436` as content of a `\tcbx→ P. 14`. If no ⟨name⟩ is given, the already existing **default** box array is used. It is considered an error, if a not existing box array ⟨name⟩ is used. It is silently ignored, if the ⟨index⟩ is out of range. The `\tcbx→ P. 14` can be customized by `tcolorbox` ⟨options⟩.

```
\boxarraygetsize{\mysize}
\foreach \n in {1,...,\mysize} { \usetcbarray{\n}{on line,colframe=yellow,
colback=yellow!10} }
```

Mary

Had

a

Little

Lamb

### \consumeboxarray[⟨name⟩]{⟨index⟩}

Typesets the box with the given ⟨index⟩ number from the box array ⟨name⟩. If no ⟨name⟩ is given, the already existing **default** box array is used. It is considered an error, if a not existing box array ⟨name⟩ is used. It is silently ignored, if the ⟨index⟩ is out of range. In contrast to `\useboxarray→ P. 436`, `\consumeboxarray` corresponds to the standard `\box` macro, i.e. after typesetting the box register is cleared and cannot be used again.

```
\boxarraygetsize{\mysize}
First run: \foreach \n in {1,...,\mysize} { \consumeboxarray{\n} }
\par
Second run: \foreach \n in {1,...,\mysize} { \consumeboxarray{\n} }
```

First run: Mary Had a Little Lamb  
 Second run:

### \consumetcbarray[⟨name⟩]{⟨index⟩}{⟨options⟩}

Typesets the box with the given ⟨index⟩ number from the box array ⟨name⟩ using `\consumeboxarray` as content of a `\tcbx→ P. 14`. If no ⟨name⟩ is given, the already existing **default** box array is used. It is considered an error, if a not existing box array ⟨name⟩ is used. It is silently ignored, if the ⟨index⟩ is out of range. The `\tcbx→ P. 14` can be customized by `tcolorbox` ⟨options⟩. After typesetting the box register is cleared and cannot be used again.

— continued from page 436 —

the appropriate places you see. The linking texts like *continued on page x* are created by `/tcb/finish→ P. 223` commands for the embedding `\tcbx→ P. 14`. To label the box parts, `/tcb/phantomlabel→ P. 114` is used.

These quite small partial boxes are

— continued on page 440 —

```
% \usepackage{lipsum}
\begin{tcolorbox}[enhanced jigsaw, size=fbox, width=6cm,
  colback=yellow!10, colframe=yellow!10!black,
  enforce breakable, % use only breakable in the real world!
  break at=5cm,
  watermark text=\arabic{tcbbreakpart},
  reset and store to box array
]
\lipsum[1]
\end{tcolorbox}

\consumeboxarray{2} \hfill \consumeboxarray{1} \hfill \consumeboxarray{1}
```

amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit

N 2015-07-13

### \boxarraygetbox[*name*]{*macro*}{*index*}

Assigns the box with the given *index* number from the box array *name* to a *macro*. If no *name* is given, the already existing **default** box array is used. It is considered an error, if a not existing box array *name* is used. If the *index* is out of range, the *macro* will be undefined.

```
\tcbx[size=small,colframe=blue!20,colback=yellow!5,on line,
  reset and store to box array]{Test}

\boxarraygetsize{\mysize} Array size: \mysize

\boxarraygetbox{\mybox}{1}
Box width: \the\wd\mybox
\quad\usebox{\mybox}
```

Array size: 1

Box width: 30.35799pt Test

N 2017-06-27

### \ifboxarrayempty[*name*]{*index*}{*true*}{*false*}

Tests the box with the given *index* number from the box array *name* for emptiness be empty and executes *true* if it is empty, and *false* otherwise. If no *name* is given, the already existing **default** box array is used. It is considered an error, if a not existing box array *name* is used.

```
\tcbx[size=small,colframe=blue!20,colback=yellow!5,on line,
  reset and store to box array]{Test}

\ifboxarrayempty{1}{no Box-1}{Box-1: \useboxarray{1}},
\ifboxarrayempty{2}{no Box-2}{Box-2: \useboxarray{2}}
```

Box 1: Test, no Box 2

## 20.4 Box Dimensions

N 2015-07-13

### \boxarraygetwidth [*<name>*] {*<macro>*} {*<index>*}

Assigns the width of the box with the given *<index>* number from the box array *<name>* to a *<macro>*. If no *<name>* is given, the already existing `default` box array is used. It is considered an error, if a not existing box array *<name>* is used. If the *<index>* is out of range, the *<macro>* will be set to 0pt.

```
\tcbx[size=small,colframe=blue!20,colback=yellow!5,on line,  
      reset and store to box array]{Test}  
  
\begin{tabular}{ll}  
  \useboxarray{1} & width of box 1: \boxarraygetwidth{\mylen}{1} \mylen\\  
  \useboxarray{2} & width of box 2: \boxarraygetwidth{\mylen}{2} \mylen  
\end{tabular}
```

Test    width of box 1: 30.35799pt  
          width of box 2: 0pt

N 2015-07-13

### \boxarraygetheight [*<name>*] {*<macro>*} {*<index>*}

Assigns the height of the box with the given *<index>* number from the box array *<name>* to a *<macro>*. If no *<name>* is given, the already existing `default` box array is used. It is considered an error, if a not existing box array *<name>* is used. If the *<index>* is out of range, the *<macro>* will be set to 0pt.

```
\tcbx[size=small,colframe=blue!20,colback=yellow!5,on line,  
      reset and store to box array]{Test}  
  
\begin{tabular}{ll}  
  \useboxarray{1} & height of box 1: \boxarraygetheight{\mylen}{1} \mylen\\  
  \useboxarray{2} & height of box 2: \boxarraygetheight{\mylen}{2} \mylen  
\end{tabular}
```

Test    height of box 1: 9.89883pt  
          height of box 2: 0pt

N 2015-07-13

### \boxarraygetdepth [*<name>*] {*<macro>*} {*<index>*}

Assigns the depth of the box with the given *<index>* number from the box array *<name>* to a *<macro>*. If no *<name>* is given, the already existing `default` box array is used. It is considered an error, if a not existing box array *<name>* is used. If the *<index>* is out of range, the *<macro>* will be set to 0pt.

```
\tcbx[size=small,colframe=blue!20,colback=yellow!5,on line,  
      reset and store to box array]{Test}  
  
\begin{tabular}{ll}  
  \useboxarray{1} & depth of box 1: \boxarraygetdepth{\mylen}{1} \mylen\\  
  \useboxarray{2} & depth of box 2: \boxarraygetdepth{\mylen}{2} \mylen  
\end{tabular}
```

Test    depth of box 1: 3.69884pt  
          depth of box 2: 0pt

## \boxarraygettotalheight [*name*] {*macro*} {*index*}

Assigns the total height of the box with the given *index* number from the box array *name* to a *macro*. If no *name* is given, the already existing `default` box array is used. It is considered an error, if a not existing box array *name* is used. If the *index* is out of range, the *macro* will be set to `Opt`.

— continued from page 437 —  
for demonstration purposes. With the tools of this section, a magazine type document could be created, but this still needs a lot of manual control.

```
\boxarrayreset
\tcbox[size=small,colframe=blue!20,colback=yellow!5,on line,
      store to box array]{Test}

\begin{tabular}{ll}
\useboxarray{1} & total height of box 1: \boxarraygettotalheight{\mylen}{1} \mylen\\
\useboxarray{2} & total height of box 2: \boxarraygettotalheight{\mylen}{2} \mylen
\end{tabular}
```

Test	total height of box 1: 13.59767pt total height of box 2: 0pt
------	---

## 20.5 Leaflet Example

The following full application example can be used to create leaflets. Obviously, the code can be adapted and customized in many ways.

```
\documentclass[a4paper,landscape]{article}
\usepackage[noheadfoot,margin=0pt]{geometry}
\usepackage[skins,raster,magazine]{tcolorbox}
\usepackage{lipsum}

\newenvironment{leaflet}{\begin{tcolorbox}[nobeforeafter,empty,colback=white,
sharp corners,size=minimal,left=10mm,right=10mm,top=10mm,bottom=10mm,
width=\textwidth/3,
breakable,
break at=\textheight,
height fixed for=all,
reset box array,
store to box array,#1]\begin{tcbitemize}[raster columns=3,raster equal skip=0pt,blankest]
\tcbitem\consumeboxarray{5}
\tcbitem\consumeboxarray{6}
\tcbitem\consumeboxarray{1}
\tcbitem\consumeboxarray{2}
\tcbitem\consumeboxarray{3}
\tcbitem\consumeboxarray{4}\end{tcbitemize}\end{tcolorbox}}{\end{document}

\begin{document}

\begin{leaflet}[underlay={\node[above=5mm,font=\footnotesize]
at (frame.south) {- \arabic{tcbbreakpart} -};}]
\includegraphics[width=\linewidth]{Basilica_5.png}
\begin{center}
\bfseries\LARGE Example
\end{center}

\section{Introduction}
\lipsum[1]

\section{Main Part A}
\lipsum[2-8]

\section{Main Part B}
\lipsum[9-15]

\section{Conclusion}
\lipsum[16-18]
\end{leaflet}
\end{document}
```

gue nulla arcu et pede. Ut suscipit enim vel sapien. Donec congue. Maecenas urna mi, suscipit in, placet ut, vestibulum ut, massa. Fusce ultrices nulla et nisl.

Etiam ac leo a risus tristique nonummy. Donec dignissim tincidunt nulla. Vestibulum rhoncus molestie odio. Sed lobortis, justo et pretium lobortis, mauris turpis condimentum augue, nec ultricies nibh arcu pretium enim. Nunc purus neque, placerat id, imperdiet sed, pelleentesque nec, nisl. Vestibulum imperdiet neque non sem accusanba. In hac habuisse platea dictumst. Etiam condimentum facilisi libero. Suspendisse in elit quis nisl aliquam dapibus. Pelleentesque auctor sapien. Sed egestas sapien nec lectus. Pelleentesque vel du vel neque bibendum viverra. Aliquam porttitor nisl nec pede. Proin mattis libero vel turpis. Donec rutrum mauris et libero. Proin euismod porta felis. Nam lobortis, metus quis elementum commodo, nunc lectus elementum mauris, eget vulputate ligula tellus eu neque. Vivamus eu dolor.

Nulla in ipsum. Praesent eros nulla, congue vitae, euismod ut, commodo a, wisi. Pelleentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Aenean nonummy magna non leo. Sed felis erat, ullamcorper in, dictum non, ultricies ut, lectus. Proin vel arcu a odio lobortis euismod. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Proin ut est. Aliquam odio. Pelleentesque massa turpis, cursus eu, euismod nec, tempor congue, nulla. Duis viverra gravida mauris. Cras tincidunt. Curabitur eros ligula, varius ut, pulvinar in, cursus faucibus, augue.


#### 4 Conclusion

Nulla mattis luctus nulla. Duis commodo velit at leo. Aliquam vulputate magna et leo. Nam vestibulum ullamcorper leo. Vestibulum condimentum rutrum mauris. Donec id mauris. Morbi molestie justo et pede. Vivamus eget turpis sed nisl cursus tempor. Curabitur mollis sapien condimentum nunc. In wisi nisl, malesuada at, dignissim sit amet, lobortis

in, odio. Aenean consequat arcu a ante. Pellentesque porta elit sit amet orci. Etiam at turpis nec elit ultricies imperdiet. Nulla facilisi. In hac habuisse platea dictumst. Suspendisse viverra aliquam risus. Nullam pede justo, molestie nonummy, scelerisque eu, facilisis vel, arcu.

Curabitur tellus magna, porttitor a, commodo a, commodo in, tortor. Donec interdum. Praesent scelerisque. Maecenas posuere sodales odio. Vivamus metus lacus, varius quis, imperdiet quis, rhoncus a, turpis. Etiam ligula arcu, elementum a, venenatis quis, sollicitudin sed, metus. Donec nunc pede, tincidunt in, venenatis vitae, faucibus vel, nibh. Pelleentesque wisi. Nullam malesuada. Morbi ut tellus ut pede tincidunt porta. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam congue neque id dolor.

Donec et nisl at wisi luctus bibendum. Nam interdum tellus ac libero. Sed sem justo, laoreet vitae, fringilla at, adipiscing ut, nibh. Maecenas non sem quis tortor eleifend fermentum. Etiam id tortor ac mauris porta vulputate. Integer porta neque vitae massa. Maecenas tempus libero a libero posuere dictum. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Aenean quis mauris sed elit commodo placerat. Class aptent taciti sociosqu ad litora torquent per combi nostra, per incertos hymenaeos. Vivamus rhoncus tincidunt libero. Etiam elementum pretium justo. Vivamus est. Morbi a tellus eget pede tristique commodo. Nulla nisl. Vestibulum sed nisl eu sapien cursus rutrum.



Example

#### 1 Introduction

Ut ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placet ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pelleentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

#### 2 Main Part A

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante, Pelleentesque a nulla. Cum sociis natoque penatibus et magnis dis parturunt montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pelleentesque cursus luctus mauris.

- 1 -

Nulla malesuada porttitor diam. Donec felis erat, congue non, vulputate at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pelleentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pelleentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et nisl. Nam vulputate metus eu enim. Vestibulum et pelleentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habuisse platea dictumst. Integer tempus convallis augue. Etiam facilis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultrices tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pelleentesque, anguis quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero du cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consecetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu,

tincidunt sit amet, laoreet vitae, arcu. Aenean fau-

cibus pede eu ante. Praesent enim elit, rutrum at,

molestie non, nonummy vel, nisl. Ut lectus eros,

malesuada sit amet, fermentum eu, sodales cursus,

magna. Donec eu purus. Quisque vehicula, urna

sed ultricies auctor, pede lorem egestas dui, et convalis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio. Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habuisse platea dictumst. Pelleentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pelleentesque, erat ac sagittis semper, nunc dui lobortis purus quis congue purus metus ultrices tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per combi nostra, per incertos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus. Pelleentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Donec odio elit, dictum in, hendrerit sit amet, egestas sed, leo. Praesent feugiat sapien aliquet odio. Integer vitae justo. Aliquam vestibulum fringilla lorem. Sed neque lectus, consecetur at, consecetur sed, eleifend ac, lectus. Nulla facilisi. Pelleentesque eget lectus. Proin eu metus. Sed porttitor. In hac habuisse platea dictumst. Suspendisse ut lectus. Ut mi, lacinia sit amet, placerat et, mollis vitae, du. Sed ante tellus, tristique ut, iaculis eu, malesuada ac, du. Mauris nibh leo, facilisis non, adipiscing quis, ultrices a, du.

#### 3 Main Part B

Morbi luctus, wisi viverra faucibus pretium, nibh est placerat odio, nec commodo wisi enim eget quam. Quisque libero justo, consecetur a, feugiat vitae, porttitor eu, libero. Suspendisse sed mauris vitae elit sollicitudin malesuada. Maecenas ultricies eros sit amet ante. Ut venenatis velit. Maecenas sed mi eget dui varius euismod. Phasellus aliquet volutpat odio. Vestibulum ante ipsum primis in faucibus orci luctus et ultrices posuere cubilia Curae; Pelleentesque sit amet pede ac sem eleifend conse-

ctuer. Nullam elementum, urna vel imperdiet sodales, elit ipsum pharetra ligula, ac pretium ante justo a nulla. Curabitur tristique arcu eu metus. Vestibulum lectus. Proin mauris. Proin eu nunc eu urna hendrerit faucibus. Aliquam auctor, pede consequat laoreet varius, eros tellus scelerisque quam, pelleentesque hendrerit ipsum dolor sed augue. Nulla nec lacus.

Suspendisse vitae elit. Aliquam arcu neque, ornare in, ullamcorper quis, commodo eu, libero. Fusce sagittis erat at erat tristique mollis. Maecenas sapien libero, molestie et, lobortis in, sodales eg, dui. Morbi ultrices rutrum lorem. Nam elementum ullamcorper leo. Morbi dui. Aliquam sagittis. Nunc placet. Pelleentesque tristique sodales est. Maecenas imperdiet lacinia velit. Cras non urna. Morbi eros pede, suscipit ac, varius vel, egestas non, eros. Praesent malesuada, diam id pretium elementum, eros sem dictum tortor, vel consectetur odio sem sed wisi.

Sed feugiat. Cum sociis natoque penatibus et magnis dis parturunt montes, nascetur ridiculus mus. Ut pelleentesque augue sed urna. Vestibulum diam eros, fringilla et, consecetur eu, nonummy id, sapien. Nullam at lectus. In sagittis ultrices mauris. Curabitur malesuada erat sit amet massa. Fusce blandit. Aliquam erat volutpat. Aliquam euismod. Aenean vel lectus. Nunc imperdiet justo nec dolor. Etiam euismod. Fusce facilisis lacinia dui. Suspendisse potenti. In mi erat, cursus id, nonummy sed, ullamcorper eget, sapien. Praesent pretium, magna in eleifend egestas, pede pede pretium lorem, quis consectetur tortor sapien facilisis magna. Mauris quis magna varius nulla scelerisque imperdiet. Aliquam non quam. Aliquam porttitor quam a lacus. Praesent vel arcu ut tortor cursus volutpat. In vita pede quis diam bibendum placerat. Fusce elementum convallis neque. Sed dolor orci, scelerisque ac, dapibus nec, ultricies ut, mi. Duis nec dui quis leo sagittis commodo.

Aliquam lectus. Vivamus leo. Quisque ornare tellus ullamcorper nulla. Mauris porttitor pharetra tortor. Sed fringilla justo sed mauris. Mauris tellus. Sed non leo. Nullam elementum, magna in cursus sodales, augue est scelerisque sapien, venenatis con-

- 4 -

The main purpose of this library is to support creation of single page posters with `tcolorboxes`.

A `tcbposter`<sup>→ P. 444</sup> is a `tikzpicture` where `tcolorboxes` can be placed in a column oriented manner using `\posterbox`<sup>→ P. 449</sup> commands. This base concept is more or less copied from the great `baposter`<sup>→ CTAN</sup> package.

The  `raster` library, see Section 16 on page 311, can produce similar looking results and may be more appropriate depending on the actual project.

- The  `raster` library has a flow oriented concept, just like a conventional text flow. The text flow (box flow) is a merely endless ribbon which gets broken into lines (and paragraphs) and the lines are broken into pages.  `raster` shapes the boxes to convenient sizes to fill lines and pages in a pleasant way.
- The  `tcbposter` library supports a quite free placement of boxes inside a page. Basically, boxes are placed like `nodes` are placed inside a `tikzpicture`. In contrast to  `raster`, this is a *single* page and not a flow of pages. The poster is divided into columns and rows. There is a more or less gentle force to use the columns (or spans of columns) for positioning and sizing while the row placement is completely optional.

The creation of this library was motivated by Ignasi.



Inside a `tikzpicture` there should be no embedded `tikzpicture`s. This rule is violated by the  `poster` library. Be aware that there may be some unwanted interactions between the main `tikzpicture` and the embedded ones inside the `tcolorboxes`.

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{poster}
```

This also loads the libraries  `skins`, see Section 10 on page 172,  `breakable`, see Section 19 on page 406,  `magazine`, see Section 20 on page 433, and  `fitting`, see Section 22 on page 457.

### 21.1 Overview

[Click me to see the tutorial](#)

You get the best overview of the  `poster` library and its facilities, if you look at the **Poster Tutorial** which is part of the `tcolorbox` documentation:  
`tcolorbox-tutorial-poster.pdf`

## 21.2 Main Poster Environment


N 2017-07-03

```
\begin{tcbposter}[\langle options\rangle]
  \langle environment content\rangle
\end{tcbposter}
```

This creates a `tikzpicture` environment with suitable additional settings defined by the given `\langle options\rangle`. Basically, `\posterbox→ P. 449` and `\posterboxenv→ P. 449` are used to place `tcolorboxes` as nodes into the environment, but additional TikZ code can also be used. As `\langle options\rangle` all `/tcb/posterset/` keys may be applied, namely:

- `/tcb/posterset/poster→ P. 446`: poster settings like columns, rows, sizes...
- `/tcb/posterset/coverage→ P. 447` and `/tcb/posterset/no coverage→ P. 447`: settings for a surrounding `tcolorbox` for background and margins.
- `/tcb/posterset/boxes→ P. 448`: style of the `tcolorboxes` used for the poster.
- `/tcb/posterset/fontsize→ P. 448`: scaling of used fonts.

```
\begin{tcbposter}[
  poster = {showframe,height=10cm,spacing=2mm},
  boxes = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox[name=A,column=3,row=2]{My first box}
\posterbox[adjusted title=Second box]
  {name=B,column=2,span=2,below=A}{My second box}
\posterbox[adjusted title=Third box]
  {name=C,column=2,between=B and bottom}{My third box}
\end{tcbposter}
```

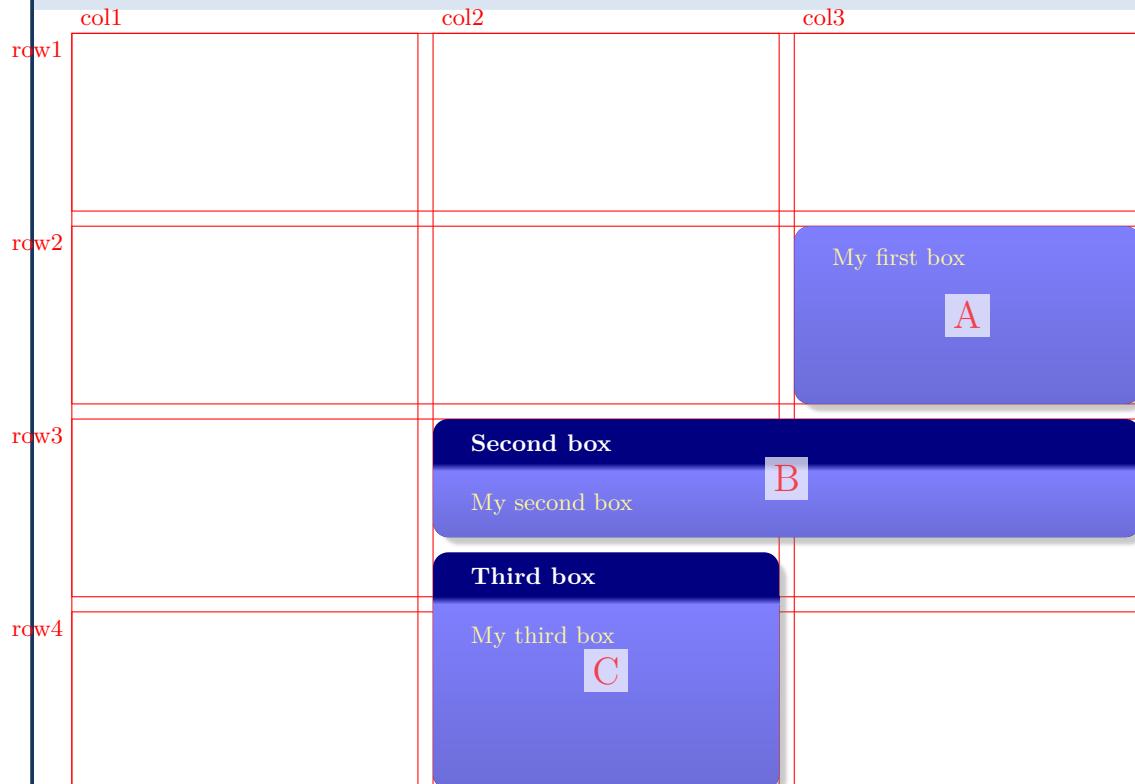

Inside `tcbposter`<sup>→ P. 444</sup>, there are several predefined TikZ nodes. These nodes share a common `/tcb/poster/prefix`<sup>→ P. 446</sup> which is `TCBPOSTER@` by default. This prefix is used to discriminate the poster nodes from local nodes of any embedded `tikzpicture` environment. You will never need this prefix using `\posterbox`<sup>→ P. 449</sup> and its placement options, but if you want to refer to a predefined node using pure TikZ code. The predefined nodes (shown without prefix) are:

- `poster`: defines the bounding box of the poster (without the coverage).
- `top`: top position plus row spacing
- `bottom`: bottom position minus row spacing
- `middle`: vertical middle position
- `col1, col2, ...`: bounding box of column 1, column 2, ...
- `row1, row2, ...`: bounding box of row 1, row 2, ...

Further nodes are defined using the `/tcb/posterloc/name`<sup>→ P. 450</sup> option.



Never use a `tcbposter`<sup>→ P. 444</sup> inside a `tcbposter`<sup>→ P. 444</sup>. But, if you do anyway, use a different `/tcb/poster/prefix`<sup>→ P. 446</sup> for the embedded poster or you surely get a total mess.

There are several properties inside a `tcbposter`<sup>→ P. 444</sup> which may be useful for advanced code (skip the following on first reading):

- `\tcbposterwidth`: Width of the poster (without margins).
- `\tcbposterheight`: Height of the poster (without margins).
- `\tcbpostercolspace`: Column distance.
- `\tcbposterrowspace`: Row distance.
- `\tcbpostercolumns`: Column quantity.
- `\tcbposterrows`: Row quantity.
- `\tcbpostercolwidth`: Width of a column.
- `\tcbposterrowheight`: Height of a row.

N 2017-07-03

### `\tcbposterset{<options>}`

Sets options for every following `tcbposter`<sup>→ P. 444</sup> inside the current TeX group. For example, the numbers for rows and columns may be defined for the whole document by this:

```
\tcbposterset{poster={columns=2,rows=3}}
```

See `tcbposter`<sup>→ P. 444</sup> for all feasible options.

### 21.3 Poster Settings

N 2017-07-03 `/tcb/posterset/poster={<option list>}` (style, no default)


This option can be applied inside `tcbposter`<sup>P. 444</sup> and `\tcbposterset`<sup>P. 445</sup> to set the given poster `<option list>`, e.g.

```
\tcbposterset{poster={width=20cm,height=15cm}}
```

For the `<option list>`, see the following keys.

N 2017-07-03 `/tcb/poster/columns=<number>` (no default, initially 3)

Sets the `<number>` of columns for a `tcbposter`.

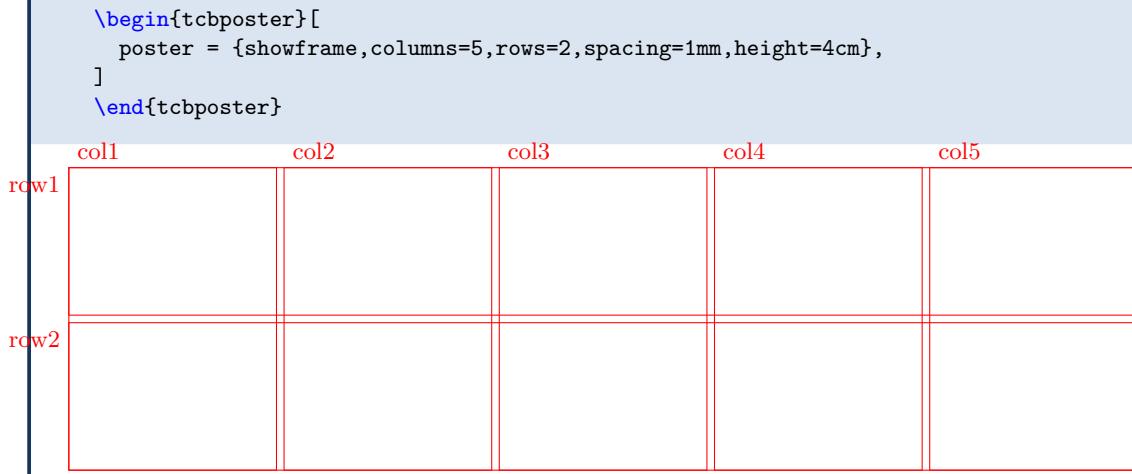

N 2017-07-03 `/tcb/poster/rows=<number>` (no default, initially 4)

Sets the `<number>` of rows for a `tcbposter`.

N 2017-07-03 `/tcb/poster/colspacing=<length>` (no default, initially 4mm)

Sets `<length>` as distance between columns.

N 2017-07-03 `/tcb/poster/rowspacing=<length>` (no default, initially 4mm)

Sets `<length>` as distance between rows.

N 2017-07-03 `/tcb/poster/spacing=<length>` (style, no default, initially 4mm)

Sets `<length>` as distance between columns and rows.

N 2017-07-03 `/tcb/poster/showframe=true|false` (default true, initially false)

Displays a red auxiliary mesh as optical support during poster creation. Also, every `/tcb/posterloc/name`<sup>P. 450</sup> is displayed.

N 2017-07-03 `/tcb/poster/width=<length>` (no default, initially \linewidth)

Sets `<length>` as width of the poster. For a typical poster, this has not to be set manually. Especially, if `/tcb/posterset/coverage`<sup>P. 447</sup> is present, use `coverage={width=<length>}` instead to change the overall width.

N 2017-07-03 `/tcb/poster/height=<length>` (no default, initially unset)

Sets `<length>` as height of the poster. For a typical poster, this has not to be set manually, but is set automatically to an appropriate value. If `/tcb/posterset/coverage`<sup>P. 447</sup> is present, use only one if any option `coverage={height=<length>}` or `poster={height=<length>}`.

N 2017-07-03 `/tcb/poster/prefix=<name>` (no default, initially TCBPOSTER@)

`<name>` is set as prefix for any TikZ node which is generated automatically by the `\tcbposterset` library. This encompasses predefined nodes like `top`, `bottom`, ..., and nodes defined by using `/tcb/posterloc/name`<sup>P. 450</sup>. Also, see Section 21.2 on page 444. For a typical poster, this value can stay as it is.

## 21.4 Coverage

N 2017-07-03


**/tcb/posterset/coverage={⟨option list⟩}** (style, no default)

This option can be applied inside `tcbposter`<sup>→ P. 444</sup> and `\tcbposterset`<sup>→ P. 445</sup> and it adds an optional coverage for the poster which is a surrounding `tcolorbox` with the given `⟨option list⟩`. Here, margins and background settings for the poster can be given. The *coverage* has several default `tcolorbox` settings suitable for the purpose:

```
enhanced, frame hidden, sharp corners, boxsep=0pt, boxrule=0pt,  
top=4mm, bottom=4mm, left=4mm, right=4mm,  
toptitle=2mm, bottomtitle=2mm, colback=white
```

The `⟨option list⟩` can contain any `tcolorbox` option.

```
\begin{tcbposter}[  
    poster = {showframe, spacing=1mm},  
    coverage = {height=5cm,  
               interior style={top color=yellow, bottom color=yellow!50!red},  
               watermark text={My Poster}, watermark color=white,  
               },  
]  
\end{tcbposter}
```

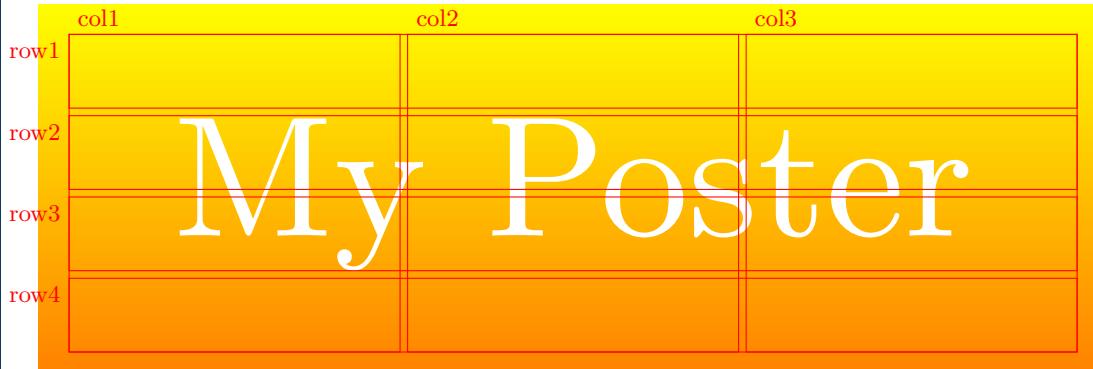

- For a typical poster, the option `/tcb/spread`<sup>→ P. 103</sup> will use the whole page for the poster coverage.
- Poster margins can be adapted by `/tcb/left`<sup>→ P. 46</sup>, `/tcb/right`<sup>→ P. 47</sup>, `/tcb/top`<sup>→ P. 49</sup>, `/tcb/bottom`<sup>→ P. 50</sup>.
- Poster background can be changed by `/tcb/colback`<sup>→ P. 34</sup>, `/tcb/interior style`<sup>→ P. 173</sup>, `/tcb/interior style image`<sup>→ P. 174</sup>, etc.
- Do not use `/tcb/poster/width`<sup>→ P. 446</sup> and `/tcb/poster/height`<sup>→ P. 446</sup> in combination with a *coverage*. Note that you may use `/tcb/width`<sup>→ P. 41</sup> and `/tcb/height`<sup>→ P. 60</sup> inside the *coverage* `⟨option list⟩`. Note that this also is not necessary when `/tcb/spread`<sup>→ P. 103</sup> is applied.

N 2017-07-03

**/tcb/posterset/no coverage** (style, no value, initially set)

Removes the surrounding `tcolorbox` completely.

## 21.5 Common Box Settings

N 2017-07-03

`/tcb/posterset/boxes={⟨option list⟩}` (style, no default)

This option can be applied inside `tcbposter`<sup>P. 444</sup> and `\tcbposterset`<sup>P. 445</sup> and it is used to set up the style of the `tcolorbox`s inside the poster. The `⟨option list⟩` can contain any `tcolorbox` option, but box size options are not assumed to be useful here, because the size will be determined by the placement options.

```
\begin{tcbposter}[
    poster   = {spacing=2mm,columns=3,rows=2},
    coverage = {height=5cm,
                interior style={top color=yellow,bottom color=yellow!50!red},
            },
    boxes    = {sharp corners=downhill,arc=3mm,boxrule=1mm,
                colback=white,colframe=cyan,
                title style={left color=black,right color=cyan},
                fonttitle=\bfseries
            }
]
\posterbox[adjusted title=First]{column=1,row=1,span=2}{First box}
\posterbox[adjusted title=Second]{column=1,row=2,span=2}{Second box}
\posterbox[adjusted title=Third]{column=3,row=1,rowspan=2}{Third box}
\end{tcbposter}
```



## 21.6 Font Scaling

N 2017-07-03

`/tcb/posterset/fontsize=⟨length⟩` (style, no default, initially unset)

This option can be applied inside `tcbposter`<sup>P. 444</sup> and `\tcbposterset`<sup>P. 445</sup>. It uses `/tcb/fit basedim`<sup>P. 463</sup> and `/tcb/fit fontsize macros`<sup>P. 464</sup> to redefine `\normalsize` to `⟨length⟩` and all other standard font size macros like `\small` and `\large` accordingly. This needs a freely scalable font family like `lmodern` to work. If `/tcb/posterset/fontsize` is not applied, there standard font size macros are not changed in any way.

```
\begin{tcbposter}[
    poster   = {spacing=2mm,columns=3,rows=2},
    coverage = {height=5cm,
                interior style={top color=yellow,bottom color=yellow!50!red},
            },
    fontsize = 15pt,    % <--- \normalsize is now 15pt
]
...
```


## 21.7 Box Placement

N 2017-07-03

`\posterbox[<options>]{<placement>}{<box content>}`

Inside a `tcbposter`<sup>→ P. 444</sup> environment, this places a `tcolorbox` with additional `tcolorbox` `<options>` and the given `<box content>` at a place determined by `<placement>`. All `<placement>` options are described in the following. Note that `<box content>` cannot contain *verbatim* material, see `posterboxenv`.

```
\begin{tcbposter}[
    poster = {showframe,height=4cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox[title=My title]{name=A,column=2,row=2}{My first box}
\end{tcbposter}
```

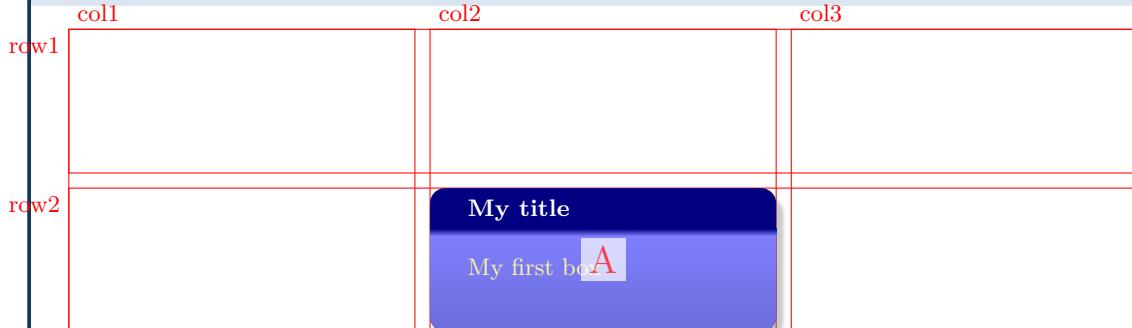

N 2017-07-03


`\begin{posterboxenv}[<options>]{<placement>}`

*<environment content>*

`\end{posterboxenv}`

This is the environment version of `\posterbox`, i.e. inside a `tcbposter`<sup>→ P. 444</sup> environment, this places a `tcolorbox` with additional `tcolorbox` `<options>` and the given `<environment content>` at a place determined by `<placement>`. In contrast to `\posterbox`, the `<environment content>` is allowed to contain *verbatim* material. Note that the implementation of `\posterbox` is more efficient than the implementation of `posterboxenv`.

```
\begin{tcbposter}[
    poster = {showframe,height=4cm,spacing=2mm,rows=2},
    boxes  = {size=small,beamer,
              colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\begin{posterboxenv}[title=My title]{name=A,column=2,between=top and bottom}
  My first box.
  \begin{tcblisting}{size=small,colback=yellow!10}
    My \textbf{first} poster listing.
  \end{tcblisting}
\end{posterboxenv}
\end{tcbposter}
```

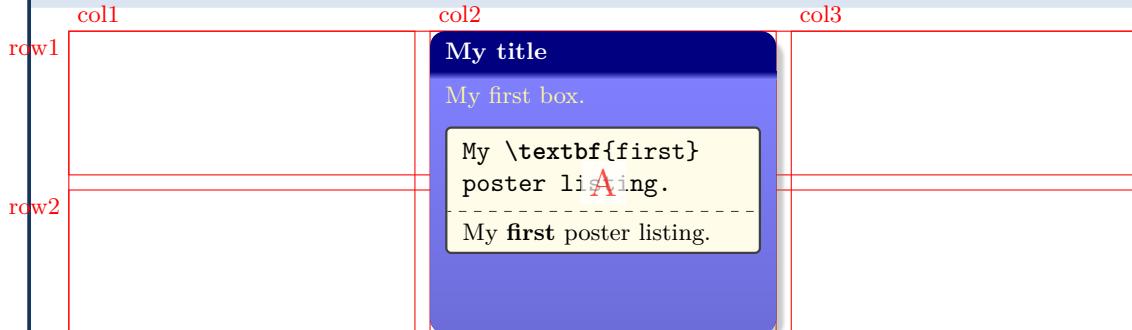


N 2017-07-03

**/tcb/posterloc/name=(*name*)**

(no default, initially @)

Sets *<name>* as reference for the current `\posterbox`<sup>P. 449</sup> or `\posterboxenv`<sup>P. 449</sup>. A TikZ shape name is constructed automatically as combination of `/tcb/poster/prefix`<sup>P. 446</sup> and *<name>*.

```
\begin{tcbposter}[
    poster = {showframe,height=2.5cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{name=A,column=2,row=2}{My first box}
\node[below right=4mm,fill=yellow] (X) at (TCBPOSTER@poster.north west) {Example A};
\draw[blue,very thick,->] (X) |- (TCBPOSTER@A);
\end{tcbposter}
```

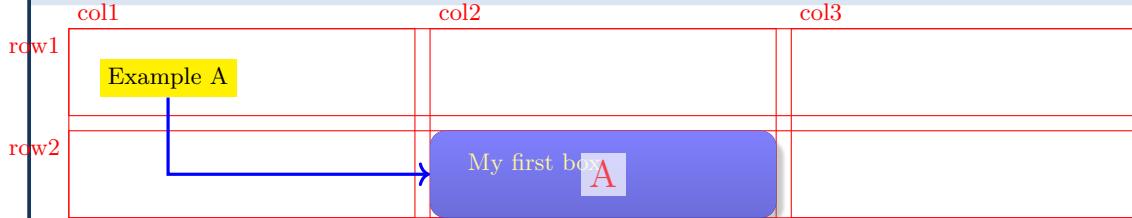


N 2017-07-03

**/tcb/posterloc/column=(*number*)**

(no default, initially 1)

Places the box at the column denoted by *<number>*. If `/tcb/posterloc/span`<sup>P. 451</sup> is not 1, the box is aligned to the left side of column *<number>*.

```
\begin{tcbposter}[
    poster = {showframe,height=2.5cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{row=1,column=2,span=2}{First box}
\posterbox{row=2,column=2,span=0.8}{Second box}
\end{tcbposter}
```

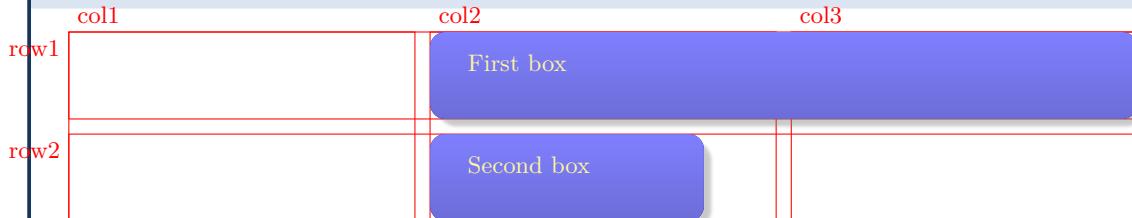

N 2017-07-03

**/tcb/posterloc/column\*=(*number*)**

(no default, initially unset)

Places the box at the column denoted by *<number>*. If `/tcb/posterloc/span`<sup>P. 451</sup> is not 1, the box is aligned to the right side of column *<number>*.

```
\begin{tcbposter}[
    poster = {showframe,height=2.5cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{row=1,column*=2,span=2}{First box}
\posterbox{row=2,column*=2,span=0.8}{Second box}
\end{tcbposter}
```



N 2017-07-03 **/tcb/posterloc/span=<number>** (no default, initially 1)

Sets the width of the current box to span *<number>* columns. *<number>* is also allowed to be a real number like 0.5 or 1.7. See */tcb/posterloc/column*<sup>→ P. 450</sup> and */tcb/posterloc/column\**<sup>→ P. 450</sup> for examples.

N 2017-07-03 **/tcb/posterloc/row=<number>** (no default, initially unset)

If this option is applied, the box is placed at the row denoted by *<number>*. Also, the height is set as fixed according to */tcb/posterloc/rowspan*.


```
\begin{tcbposter}[
    poster = {showframe,height=2.5cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{row=1,column=1}{First box}
\posterbox{row=1,column=2,rowspan=2}{Second box}
\posterbox[natural height]{row=1,column=3}{Third box}
\end{tcbposter}
```



N 2017-07-03 **/tcb/posterloc/rowspan=<number>** (no default, initially 1)

Sets the height of the current box to span *<number>* rows. *<number>* is also allowed to be a real number like 0.5 or 1.7.

```
\begin{tcbposter}[
    poster = {showframe,height=2.5cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{row=1,column=1,rowspan=0.9}{First box}
\posterbox{row=1,column=2,rowspan=1.5}{Second box}
\posterbox{row=1,column=3,rowspan=2}{Third box}
\end{tcbposter}
```

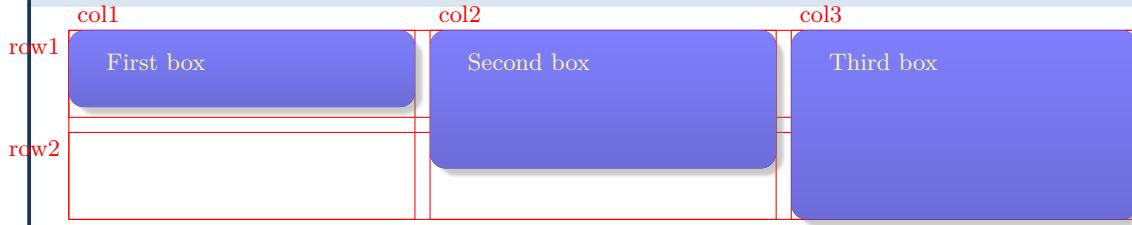

N 2017-07-03 **/tcb/posterloc/fixed height** (no value, initially 0pt)

Sets the height of the current box span rows as denoted by */tcb/posterloc/rowspan*. This can be used, if not */tcb/posterloc/row*, but another height placement option is applied.


N 2017-07-03

/tcb/posterloc/below=<name>

(no default, initially top)

The box is placed below another box with the given <name>. Also, <name> can be a predefined node, see Section 21.2 on page 444.

```
\begin{tcbposter}[
    poster = {showframe,height=3cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{name=A,column=1,below=top}{First box}
\posterbox{name=B,column=1,below=A}{Second box}
\posterbox{name=C,column=2,below=B}{Third box}
\posterbox{name=D,column=3,below=row1}{Fourth box}
\end{tcbposter}
```

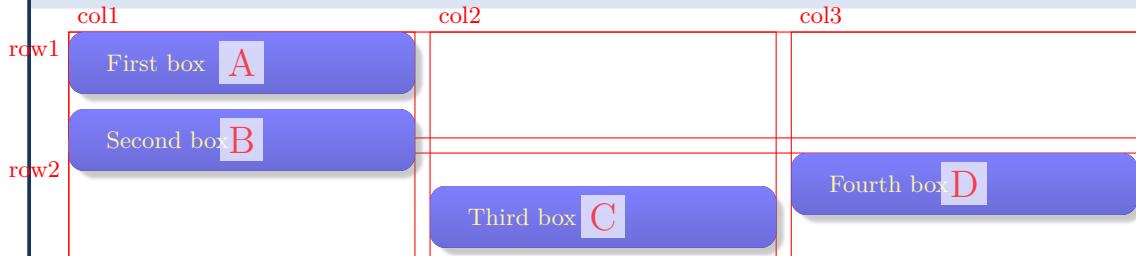


N 2017-07-03

/tcb/posterloc/above=<name>

(no default, initially unset)

The box is placed above another box with the given <name>. Also, <name> can be a predefined node, see Section 21.2 on page 444.

```
\begin{tcbposter}[
    poster = {showframe,height=3cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{name=A,column=1,above=bottom}{First box}
\posterbox{name=B,column=1,above=A}{Second box}
\posterbox{name=C,column=2,above=B}{Third box}
\posterbox{name=D,column=3,above=row2}{Fourth box}
\end{tcbposter}
```

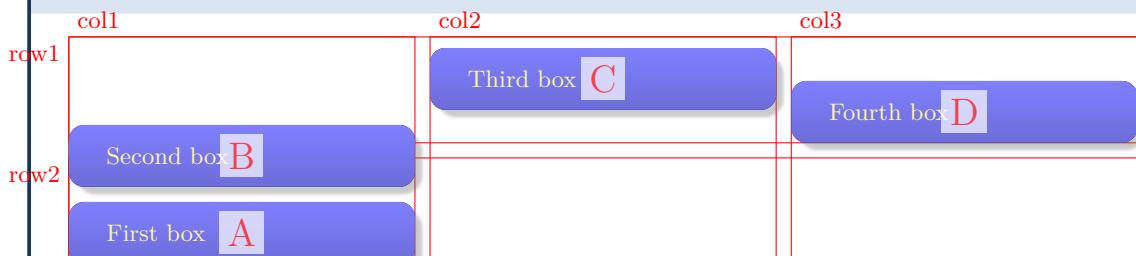


N 2017-07-03

### /tcb/posterloc/at=<name>

(no default, initially unset)

The box is placed at the position with the given <name>. This is quite likely a predefined node, see Section 21.2 on page 444.

```
\begin{tcbposter}[
    poster = {showframe,height=3cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{name=A,column=1,at=middle}{First box}
\posterbox{name=B,column=2,at=row1}{Second box}
```

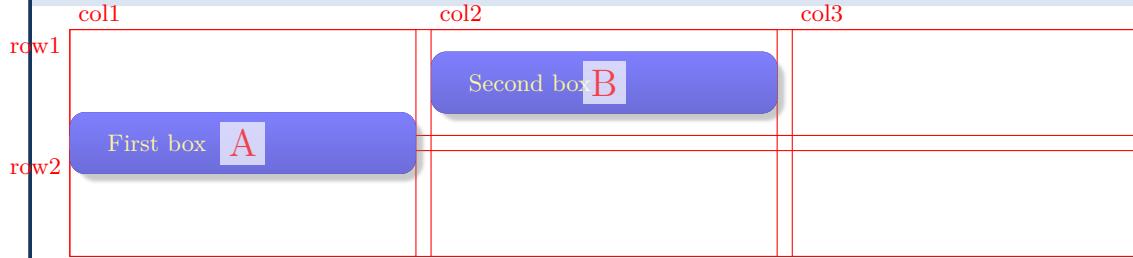


N 2017-07-03

### /tcb/posterloc/between=<name1> and <name2>

(no default, initially unset)

The box is placed below a box <name1> and above another box <name2>. Also, <name1> and <name2> can be predefined nodes, see Section 21.2 on page 444.

```
\begin{tcbposter}[
    poster = {showframe,height=3cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{name=A,column=1,below=top}{First box}
\posterbox{name=B,column=1,between=A and bottom}{Second box}
\posterbox{name=C,column=2,above=bottom}{Third box}
\posterbox{name=D,column=2,between=top and C,span=2}{Fourth box}
\posterbox{name=E,column=3,between=D and bottom}{Fifth box}
```

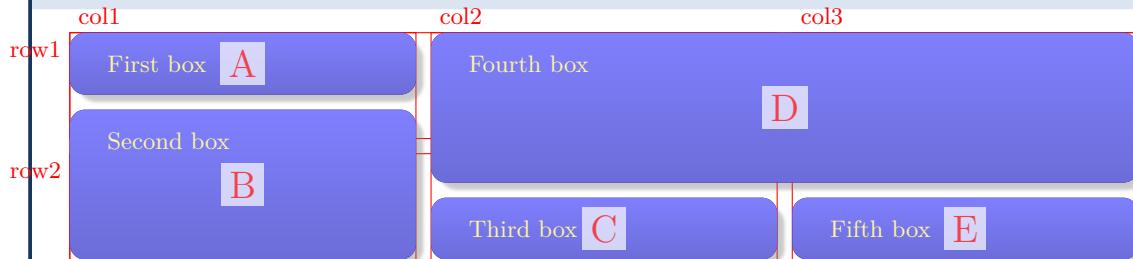

The box is broken into partial boxes. These partial boxes are placed following the given <sequence> of placements. The feasible syntax for the <sequence> is:

```
<column a> between <name a1> and <name a2> then
<column b> between <name b1> and <name b2> then
<column c> between <name c1> and <name c2> then...
```

Obviously, this places the first part box at <column a> between <name a2> and <name a2>. The second box part is placed at <column b> between <name b2> and <name b2>, and so on.

```
\begin{tcbposter}[
    poster = {showframe,height=6cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox[adjusted title=A]{name=A,column=1,below=top,span=2}{First box}
\posterbox{name=B,column=2,above=bottom,span=2}{Second box}
\posterbox[adjusted title=C,colframe=red!50!black,colback=red!50]{
    name=C, sequence=1 between A and bottom then
        2 between A and B then
        3 between top and B
    }{\lipsum[2]}
\end{tcbposter}
```




N 2017-07-03

**/tcb/placeholder**

(style, no value)

If the box content of a `/tcb/posterloc/sequence`<sup>→ P. 454</sup> is too short to fill all reserved box parts, the empty boxes are drawn with the `/tcb/placeholder` style. This style can be redefined, e.g. to `/tcb/blankest`<sup>→ P. 271</sup>, if nothing should be drawn for empty boxes.

```
\begin{tcbposter}[
    poster = {showframe,height=2.5cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{name=A,column=1,below=top,span=2}{First box}
\posterbox[colframe=red!50!black,colback=red!50]{
    name=B, sequence=1 between A and bottom then
        2 between A and bottom then
        3 between top and bottom
}{Second box followed by placeholder boxes}
\end{tcbposter}
```

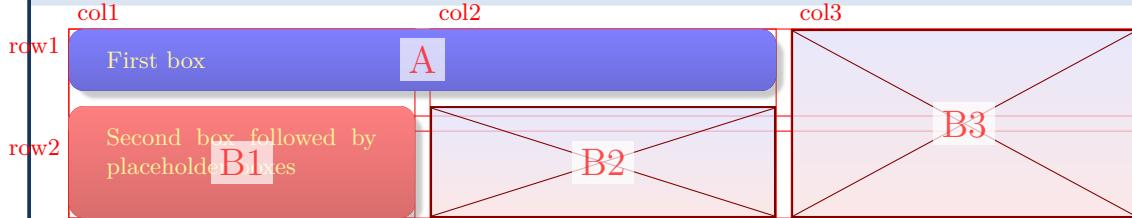


N 2017-07-03

**/tcb/posterloc/xshift=<length>**

(no default, initially Opt)


Horizontal shift of a box by `<length>`.

```
\begin{tcbposter}[
    poster = {showframe,height=3cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{name=A,column=1,row=1,xshift=6mm}{First box}
\posterbox{name=B,column=2,row=2,xshift=-6mm}{Second box}
\end{tcbposter}
```

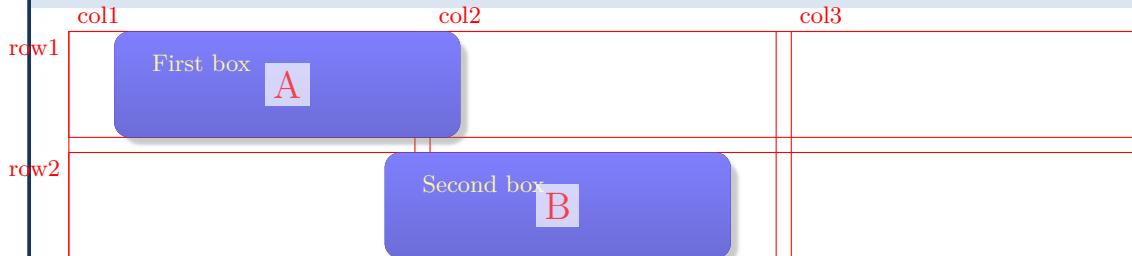

Vertical shift of a box by <length>.

```
\begin{tcbposter}[
    poster = {showframe,height=3cm,spacing=2mm,rows=2},
    boxes  = {beamer,colframe=blue!50!black,colback=blue!50,colupper=yellow!50},
]
\posterbox{name=A,column=1,row=1,yshift=-4mm}{First box}
\posterbox{name=B,column=2,row=2,yshift=4mm}{Second box}
\end{tcbposter}
```

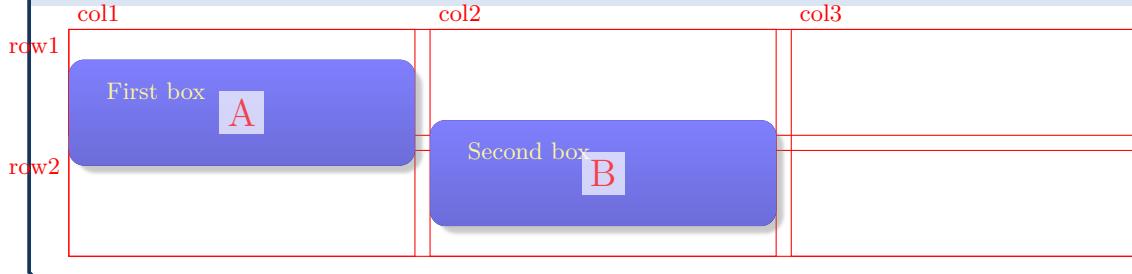

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{fitting}
```

### 22.1 Macros of the Library

`\tcbxboxfit [⟨options⟩] {⟨box content⟩}`

Creates a colored box where the given *⟨box content⟩* is fitted to the width and height of the box. A `tcbxboxfit` has to have a fixed height. If no fixed height is given, a square box is constructed. In principle, most *⟨options⟩* for a `tcolorbox`<sup>→ P. 12</sup> can be used for `\tcbxboxfit` with some restrictions. A `\tcbxboxfit` cannot have a lower part and cannot be broken.

```
% \usepackage{lipsum} \tcbuselibrary{raster}
\tcbset{colframe=blue!50!black,colback=red!10!white,
        boxsep=0pt,top=1mm,bottom=1mm,left=1mm,right=1mm,
        fit algorithm=hybrid*,raster equal skip=1mm}
\begin{tcbraster}[raster columns=3,raster valign=bottom]
    \tcbxboxfit[height=8cm]{\lipsum[1]}
    \tcbxboxfit[height=4cm]{\lipsum[1]}
    \tcbxboxfit[height=2cm]{\lipsum[1]}
\end{tcbraster}
\begin{tcbraster}[colback=green!10!white,boxsep=1mm]
    \tcbxboxfit[height=4cm]{\lipsum[2]}
    \tcbxboxfit[height=4cm,title=With a title]{\lipsum[2]}
\end{tcbraster}
```

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

With a title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

This is a L<sup>A</sup>T<sub>E</sub>X length adapted automatically by most variants of [/tcb/fit algorithm](#)<sup>P. 468</sup>. Therefore, it never is to be changed by the user, but may be applied read-only. The \tcbfitdim corresponds to the font size and may also be used to calculate box margins or other distances in dependency. The initial and maximum value for \tcbfitdim is set by [/tcb/fit basedim](#)<sup>P. 463</sup>.

### \tcbfontsize{\<factor>}

Selects a font size inside a tcolorbox which is scaled with the given *<factor>* relative to \tcbfitdim. Also see [/tcb/fit fontsize macros](#)<sup>P. 464</sup>

```
\tcbset{colback=red!5!white,size=small,
        colframe=red!75!black}
\begin{tcolorbox}[fit basedim=10pt]
  {\tcbfontsize{0.25} Very tiny,\}\
  {\tcbfontsize{0.5} Small,\}\
  {\tcbfontsize{1} Normal,\}\
  {\tcbfontsize{2} Large,\}\
  {\tcbfontsize{4} Huge.}
\end{tcolorbox}
```

Very tiny.  
Small,  
Normal,  
Large,  
**Huge.**

```
\tcbset{colback=red!5!white,size=small,
        colframe=red!75!black}
\begin{tcolorbox}[fit basedim=10pt,
                 fit to height=2cm]
  {\tcbfontsize{0.25} Very tiny,\}\
  {\tcbfontsize{0.5} Small,\}\
  {\tcbfontsize{1} Normal,\}\
  {\tcbfontsize{2} Large,\}\
  {\tcbfontsize{4} Huge.}
\end{tcolorbox}
```

Very tiny.  
Small,  
Normal,  
Large,  
**Huge.**

## 22.2 Producing \tcboxfit Commands

\newtcboxfit[*init options*]{\*name*} [*number*] [*default*] {\*options*}

Creates a new macro \*name* based on \tcboxfit<sup>→ P. 457</sup>. Basically, \newtcboxfit operates like \newcommand. The new macro \*name* optionally takes *number*+1 arguments, where *default* is the default value for the optional first argument. The *options* are given to the underlying tcboxfit. The *init options* allow setting up automatic numbering, see Section 5 from page 128.

```
\newtcboxfit{\mybox}{colback=red!5!white,
            colframe=red!75!black, width=4cm,
            height=1.5cm, halign=center}

\mybox{This is my own box.}\par
\mybox{This is my own box with more text
      to be written.}
```

This is my  
own box.

This is my own  
box with more  
text to be written.

```
% \usepackage{lipsum}
\newtcboxfit{\mybox}[2]{colback=red!5!white,
                    colframe=red!75!black, fonttitle=\bfseries,
                    boxsep=1mm, left=0mm, right=0mm, top=0mm,
                    bottom=0mm, halign=center, valign=center,
                    nobeforeafter, width=#1, height=#2}

\mybox{2.5cm}{1cm}{First box}%
\mybox{2.5cm}{1cm}{Second box with more text} \\
\mybox{5cm}{2cm}{Third box with text} \\
\mybox{5cm}{3cm}{\lipsum[1]}
```

First box      Second box  
with more text

Third box with text

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing elit, sed diam nonummy nibh euismod tincidunt ut laoreet dolore magna aliquam erat volutpat. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

```
% \usepackage{lipsum}
\newtcboxfit{\mybox}[2][]{colback=red!5!white,
                     colframe=red!75!black,
                     width=#2, height=#2/3*2, #1}

\mybox[colback=yellow]{5cm}%
{\lipsum[2]}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vietac ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

\renewtcboxfit[*init options*]{\*name*} [*number*] [*default*] {\*options*}

Operates like \newtcboxfit, but based on \renewcommand instead of \newcommand. An existing macro is redefined.

### \NewTCBoxFit [*init options*] {\*name*} {\*specification*} {\*options*}

Creates a new command  $\langle name \rangle$  based on  $\text{\tcboxfit}^{\rightarrow P.457}$ . Basically,  $\text{\NewTCBoxFit}$  operates like  $\text{\NewDocumentCommand}$ . This means, the new command  $\langle name \rangle$  is constructed with the given LATEX3 argument  $\langle specification \rangle$  following [25]. An error is issued if  $\langle name \rangle$  has already been defined. The  $\langle options \rangle$  are given to the underlying  $\text{\tcboxfit}^{\rightarrow P.457}$ . Note that  $/tcb/savedelimiter^{\rightarrow P.33}$  is set to the given  $\langle name \rangle$  automatically.

The  $\langle init options \rangle$  allow setting up automatic numbering, see Section 5 from page 128.

```
% \usepackage{lipsum}

\NewTCBoxFit{\mybox}{ O{} m !o }
  {colback=red!5!white,
   colframe=red!75!black,
   width=#2,height=#2/3*2,
   IfValueT={#3}{height=#3},
   #1}

\mybox[colback=yellow]{5cm}%
  {\lipsum[2]}

\mybox[colback=yellow]{5cm}[4cm]{\lipsum[2]}
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### \RenewTCBoxFit [*init options*] {\*name*} {\*specification*} {\*options*}

Operates like  $\text{\NewTCBoxFit}$ , but based on  $\text{\RenewDocumentCommand}$  instead of  $\text{\NewDocumentCommand}$ . An existing command is redefined.

### \ProvideTCBoxFit [*init options*] {\*name*} {\*specification*} {\*options*}

Operates like  $\text{\NewTCBoxFit}$ , but based on  $\text{\ProvideDocumentCommand}$  instead of  $\text{\NewDocumentCommand}$ . The command  $\langle name \rangle$  is only created if it is not already defined.

### \DeclareTCBoxFit [*init options*] {\*name*} {\*specification*} {\*options*}

Operates like  $\text{\NewTCBoxFit}$ , but based on  $\text{\DeclareDocumentCommand}$  instead of  $\text{\NewDocumentCommand}$ . The new command  $\langle name \rangle$  is always created, irrespective of an already existing command with the same name.

```
\NewTotalTCBoxFit [init options] {\i<name>i}{\i<specification>i}{\i<options>i}{\i<content>i}
```

Creates a new command  $\langle name \rangle$  based on  $\text{\tcboxfit}$ <sup>P. 457</sup>. In contrast to  $\text{\NewTCBoxFit}$ <sup>P. 460</sup>, also the  $\langle content \rangle$  of the  $\text{tcboxfit}$  is specified.

Basically, `\NewTotalTCBoxFit` operates like `\NewDocumentCommand`. This means, the new command `\langle name\rangle` is constructed with the given L<sup>A</sup>T<sub>E</sub>X3 argument `specification` following [25]. An error is issued if `\langle name\rangle` has already been defined. The `options` are given to the underlying `\tcboxfit`<sup>→ P. 457</sup> which is filled with the specified `content`.

Note that `/tcb/savedelimiter`<sup>→P.33</sup> is set to the given  $\langle name \rangle$  automatically.

The `<init options>` allow setting up automatic numbering, see Section 5 from page 128.

```
% \usepackage{lipsum}

\NewTotalTCBoxFit{\multibox}{ O{} m O{10} m }
{nobeforeafter,colback=red!5!white,colframe=red!75!black,width=#2,height=#2/3*2,
  valign=center,#1}
{ \foreach \n in {1,...,#3} { #4 } }

\multibox{5cm}{I shall not repeat.}
\multibox[colframe=blue!75!white]{5cm}[20]{I shall not repeat.} \\
\multibox[colback=yellow,height=5cm]{14cm}[100]{I shall not repeat.}
```

```
\RenewTotalTCBoxFit[<init options>]{\<name>}{\<specification>}{\<options>}{\<content>}]
```

Operates like `\NewTotalTCBoxFit`, but based on `\RenewDocumentCommand` instead of `\NewDocumentCommand`. An existing command is redefined.

```
\ProvideTotalTCBoxFit [⟨init options⟩] {⟨name⟩} {⟨specification⟩} {⟨options⟩} {⟨content⟩}
```

Operates like `\NewTotalTCBoxFit`, but based on `\ProvideDocumentCommand` instead of `\NewDocumentCommand`. The command `\<name>` is only created if it is not already defined.

```
\DeclareTotalTCBoxFit [⟨init options⟩] {⟨name⟩} {⟨specification⟩} {⟨options⟩} {⟨content⟩}
```

Operates like `\NewTotalTCBoxFit`, but based on `\DeclareDocumentCommand` instead of `\NewDocumentCommand`. The new command `\(name)` is always created, irrespective of an already existing command with the same name.

## 22.3 Option Keys of the Library

The font size for the content of a box with fixed width and fixed height can be adjusted automatically. This is called the *fitbox capture mode*. Note that the fit control algorithm constructs a series of versions for the box and selects the “best”. Therefore, the compilation time is quite longer than for a normal box. The algorithm will fail, if a different selected font size does not change the overall size of the box content. The `\tcboxfit→ P. 457` macro uses this algorithm by default.



The fit control keys are only applicable to unbreakable boxes without a lower part. The box content should not change counters.

### /tcb/**fit**

(style, initially unset)

Sets the `/tcb/capture→ P. 109` mode to **fitbox**, i.e. enables the font size adjustment algorithm. Thereby, a `tcolorbox→ P. 12` acts like `\tcboxfit→ P. 457` where the given `<box content>` is fitted to the width and height of the box. Therefore, the box has to have a fixed height. If no fixed height is given, a square box is constructed. The font dimension `\tcbfitdim→ P. 458` can also be used to adjust the margins of the box since a box with a tiny font may not need large margins. The number of constructed boxes is saved to the macro `\tcbfitsteps` for analysis.

```
% \usepackage{lipsum}
% \tcbuselibrary{skins}
\newtcolorbox{fitting}[2][] {fit,height=#2,boxsep=1pt,valign=center,opacityupper=0.5,
  top=0.4\tcbfitdim,bottom=0.4\tcbfitdim,left=0.75\tcbfitdim,right=0.75\tcbfitdim,
  enhanced,watermark text={\tcbfitsteps},colframe=blue!75!black,colback=white,#1}

\begin{fitting}{4cm}
\lipsum[1]
\end{fitting}

\begin{fitting}{2cm}
\lipsum[2]
\end{fitting}

\begin{fitting}{1cm}
\lipsum[3]
\end{fitting}
```

1  
Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

2  
Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

3  
Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

**/tcb/fit to=<width> and <height>** (style, initially unset)

Shortcut for using `/tcb/fit`<sup>P. 462</sup> and setting the `<width>` and `<height>` values separately.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[fit to=3cm and 2cm]
This box content is fitted to the given
dimensions.
\end{tcolorbox}
```

This box content is fitted to the given dimensions.

**/tcb/fit to height=<height>** (style, initially unset)

Shortcut for using `/tcb/fit`<sup>P. 462</sup> and setting the `<height>` value separately.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[fit to height=2cm]
This box content is fitted to the given
height.
\end{tcolorbox}
```

This box content is fitted to the given height.

**/tcb/fit basedim=<length>** (no default, initially 10pt)

Sets the starting font dimension for the font size adjustment algorithm to `<length>`. The algorithm never enlarges this dimension. Therefore, the final `\tcbsfitdim`<sup>P. 458</sup> is identical to or small than `<length>`.

```
\tcbset{colback=red!5!white,colframe=red!75!black}

\begin{tcolorbox}[fit to=4cm and 2cm]
Too few words for the box.
\end{tcolorbox}

\begin{tcolorbox}[fit to=4cm and 2cm,
fit basedim=50pt]
Enough words for the box.
\end{tcolorbox}
```

Too few words for the box.

Enough words for the box.

**/tcb/fit skip=<real value>** (no default, initially 1.2)

Sets the skip value of the selected font to `<real value>` times `\tcbsfitdim`<sup>P. 458</sup>.

```
% \usepackage{lipsum}
\tcbset{colback=red!5!white,
colframe=red!75!black, left=1mm,
right=1mm, boxsep=0mm}

\begin{tcolorbox}[fit to=5cm and 4cm,
fit skip=1.0 ]
\lipsum[1]
\end{tcolorbox}
```

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean fermentum dui donec dui. Malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Redefines the standard L<sup>A</sup>T<sub>E</sub>X font size macros `\tiny`, `\scriptsize`, `\footnotesize`, `\small`, `\normalsize`, `\large`, `\Large`, `\LARGE`, `\huge`, and `\Huge`, to set font sizes relative to the current `\tcbfitdim`<sup>P. 458</sup>. Note that the display skip values for mathematical formulas are respected by the redefined macros. Also see `\tcbfontsize`<sup>P. 458</sup>.

```
% \usepackage{lipsum}
\tcbset{colback=red!5!white,
colframe=red!75!black, left=1mm,
right=1mm, boxsep=0mm}

\begin{tcolorbox}[fit to height=4cm]
{\Large\bfseries This text is
not adapted:\par}
\lipsum[2]
\end{tcolorbox}

\begin{tcolorbox}[fit to height=4cm,
fit fontsize macros ]
{\Large\bfseries This text is adapted:\par}
\lipsum[2]
\end{tcolorbox}
```

### This text is not adapted:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### This text is adapted:

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

```
\tcbset{colback=red!5!white,
colframe=red!75!black, left=1mm,
right=1mm, boxsep=0mm}

\let\realHuge=\Huge

\begin{tcolorbox}[fit basedim=7pt,
fontupper=\normalsize,
fit fontsize macros]
The relative font size macros
are also usable without the
\textit{fit} algorithm.\par
{\Huge Adapted Huge} ---
{\realHuge Original Huge}
\end{tcolorbox}
```

The relative font size macros are also usable without the `fit` algorithm.

Adapted Huge –  
Original Huge

```
\tcbset{size=fbox,colback=red!5!white,
colframe=red!75!black}

\tcboxfit[height=5cm,
fit fontsize macros,
fonttitle=\normalsize\bfseries,
title=Adapted title]
{\lipsum[2]}
```

### Adapted title

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### /tcb/fit height plus=<dimension>

(no default, initially Opt)

The box is allowed to enlarge the fixed height up to the given <dimension>, before a font size fit is applied. An optional /tcb/fit width plus is tried after the height adaption.

```
% \usepackage{lipsum}
\tcbsset{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,bottom=1mm,
right=1mm,boxsep=0mm,width=3cm,height=3cm,nobeforeafter}

\begin{tcolorbox}[fit]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[fit,fit height plus=1cm]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[fit]
\lipsum[2]
\end{tcolorbox}
\begin{tcolorbox}[fit,fit height plus=1cm]
\lipsum[2]
\end{tcolorbox}
```

This is a tcolorbox.

This is a tcolorbox.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### /tcb/fit width plus=<dimension>

(no default, initially Opt)

The box is allowed to enlarge the fixed width up to the given <dimension>, before a font size fit is applied. An optional /tcb/fit height plus is tried before the width adaption.

```
% \usepackage{lipsum}
\tcbsset{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,bottom=1mm,
right=1mm,boxsep=0mm,width=3cm,height=3cm,nobeforeafter}

\begin{tcolorbox}[fit]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[fit,fit width plus=1cm]
This is a tcolorbox.
\end{tcolorbox}
\begin{tcolorbox}[fit]
\lipsum[2]
\end{tcolorbox}
\begin{tcolorbox}[fit,fit width plus=1cm]
\lipsum[2]
\end{tcolorbox}
```

This is a tcolorbox.

This is a tcolorbox.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

**!** Typically but not necessarily, the optional title of a `tcolorbox` is not part of the fit operation. If a `/tcb/fit width plus` is applied, the title is also adapted to the new width. If counters are increased inside the title text, they may be increased more than one time. To avoid this, you are encouraged to use `/tcb/phantom→ P. 114` or `/tcb/step and label→ P. 115` to set counters or use automatic numbering, see Subsection 5.1 from page 128.

`/tcb/fit width from=<min> to <max>`

(style, no default)

Sets the box width to  $\langle min \rangle$  and allows the width to grow up to  $\langle max \rangle$ .

```
% \usepackage{lipsum}
\tcbset{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,bottom=1mm,
right=1mm,boxsep=0mm,height=4cm}

\begin{tcolorbox}[fit,width=\ linewidth/2]
\lipsum[2]
\end{tcolorbox}\par
\begin{tcolorbox}[fit width from=\ linewidth/2 to \ linewidth]
\lipsum[2]
\end{tcolorbox}\par
```

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

/tcb/fit height from=<min> to <max>

(style, no default)

Sets the box height to <min> and allows the height to grow up to <max>.

```
% \usepackage{lipsum}
\newtcolorbox{mybox}{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,
bottom=1mm,right=1mm,boxsep=0mm,width=4cm,nobeforeafter,
fit height from=1cm to 8cm}

\begin{mybox}
This is a tcolorbox.
\end{mybox}
\begin{mybox}
This is a tcolorbox. This is a tcolorbox. This is a tcolorbox.
\end{mybox}
\begin{mybox}
\lipsum[2]
\end{mybox}
```

This is a tcolorbox.

This is a tcolorbox. This  
is a tcolorbox. This is a  
tcolorbox.

Nam dui ligula, fringilla a,  
euismod sodales, sollicitudin vel, wisi. Morbi auctor  
lorem non justo. Nam lacus libero, pretium at,  
lobortis vitae, ultricies et,  
tellus. Donec aliquet, tortor sed accumsan bibendum,  
erat ligula aliquet magna, vitae ornare odio  
metus a mi. Morbi ac orci  
et nisl hendrerit mollis. Suspendisse ut massa.  
Cras nec ante. Pellentesque a nulla. Cum sociis natoque  
penatibus et magnis dis parturient montes, nasce-  
tur ridiculus mus. Aliquam tincidunt urna. Nulla ullam-  
corper vestibulum turpis. Pellentesque cursus luctus  
mauris.

`/tcb/fit algorithm=<name>`

(no default, initially `fontsize`)

Sets the algorithm for the fitting process *after* optionally width and height are adapted. In the following, adapting the font size means adapting  $\text{\tcbfitdim}^{\rightarrow \text{P.458}}$ . Feasible values for `<name>` are:

- **`fontsize`** (initial): The algorithm is a bisection method that adapts the font size until certain stop conditions are fulfilled. This is the most time-consuming method but it is robust and gives pleasant results.

**!** The used font has to be freely scalable for this method! Other content than text is not scaled down. The aspect ratio is fully guaranteed.

- N 2014-10-29
- **`fontsize*`**: First, the `fontsize` algorithm is applied. If the font was scaled down and the resulting height is too small, the box is squeezed to fit the area.

**!** The used font has to be freely scalable for this method! Other content than text may be slightly rescaled. The aspect ratio cannot be fully guaranteed.

- **`areasize`**: The algorithm calculates the area size for the text without scaling the font. The text box is shaped for the needed aspect ratio in one or two steps. Finally, it is scaled down with a standard `\resizebox` macro.

**!** The used font has not to be scalable. Every box content is scaled down. The aspect ratio cannot be fully guaranteed.

- N 2014-10-29
- **`areasize*`**: The `areasize` algorithm is applied, but if the content was scaled down and the resulting height is too small, the box is squeezed to fit the area.

**!** The used font has not to be scalable. Every box content is scaled down. The aspect ratio cannot be fully guaranteed.

- **`hybrid`**: First, this algorithm estimates the needed font size in one or two steps. Then an `areasize` fitting as above is applied.

**!** The used font has to be freely scalable for this method! Other content than text may be slightly rescaled. The aspect ratio cannot be fully guaranteed.

- N 2014-10-29
- **`hybrid*`**: First, this algorithm estimates the needed font size in one or two steps. Then an `areasize*` fitting as above is applied.

**!** The used font has to be freely scalable for this method! Other content than text may be slightly rescaled. The aspect ratio cannot be fully guaranteed.

- **`squeeze`**: The text box is brutally scaled down to fit.

**!** The aspect ratio is very likely to be horrible. You should not use this method for final documents.

```
% \usepackage{lipsum}
\newtcboxfit{\mybox}[1]{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,
bottom=1mm,right=1mm,boxsep=0mm,width=3.5cm,height=7cm,nobeforeafter,
before upper=\textcolor{blue}{\rule{5mm}{5mm}}\ ,
enhanced,watermark text={\tcbfitsteps},
fonttitle=\bfseries,adjusted title=#1}

\mybox{fontsize}{\lipsum[2]}\hfill
\mybox{hybrid}{\lipsum[2]}\hfill
\mybox{areaise}{\lipsum[2]}\hfill
\mybox{squeeze}{\lipsum[2]}
```

Quality `\dotfill` versus `\dotfill` Speed

### fontsize

 Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### hybrid

 Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### areaise

 Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

### squeeze

 Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Quality ..... versus ..... Speed

```
% \usepackage{lipsum}
```

```
\newtcboxfit{\mybox}[2]{colback=red!5!white,colframe=red!75!black,left=1mm,top=1mm,
size=tight,width=7.2cm,height=5cm,nobeforeafter,
before upper=\textcolor{blue}{\rule{5mm}{5mm}}\ ,
enhanced,fonttitle=\bfseries,adjusted title=#2,fit algorithm=#1}
```

```
\mybox{hybrid}{hybrid (possible gap at end)}{\lipsum[1]}\hfill
\mybox{hybrid*}{hybrid* (no gap but possibly squeezed)}{\lipsum[1]}
```

### hybrid (possible gap at end)

 Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

### hybrid\* (no gap but possibly squeezed)

 Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.



The following options set control parameters for the fit algorithm. Mainly, they apply to the `fontsize` variant, see [/tcb/fit algorithm](#)<sup>→ P. 468</sup>. The options should be seen as experimental and are likely to change in future versions, if necessary.

`/tcb/fit maxstep=<number>` (no default, initially 20)

Sets the maximal step size for the font size adjustment algorithm. In normal situations, the algorithm stops before reaching the initial value of 20 steps. If the box content does not shrink, this value prevents an endless loop.

`/tcb/fit maxfontdiff=<dimension>` (no default, initially 0.1pt)

The algorithm stops, if the font size is determined within a deviation of `<dimension>`.

`/tcb/fit maxfontdiffgap=<dimension>` (no default, initially 1pt)

The algorithm stops, if the number of lines is determined and the font size is determined within a deviation of `<dimension>`.

`/tcb/fit maxwidthdiff=<dimension>` (no default, initially 1pt)

The algorithm stops, if the (optionally) flexible box width is determined within a deviation of `<dimension>`.

`/tcb/fit maxwidthdiffgap=<dimension>` (no default, initially 10pt)

The algorithm stops, if the number of lines is determined and the (optionally) flexible box width is determined within a deviation of `<dimension>`.

`/tcb/fit warning=<value>` (no default, initially off)

Typically, the fit control algorithm constructs several auxiliary boxes to determine the optimal one. If not switched off, the construction of the auxiliary boxes may produce many `\hbox` warnings. This option key changes the `\hbadness` value.

- **off**: Most of `Underfull \hbox' and `Overfull \hbox' warnings are switched off (including the ones for the finally used box).
- **on**: All warnings for all auxiliary boxes are displayed.
- **final**: Only warnings for the finally used box are displayed. Note that an additional box has to be constructed for these messages.

## 23 Library hooks

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{hooks}
```

For the skin related options, the library  skins has to be loaded separately.

### 23.1 Concept of Hooks

A hook is a placeholder in some L<sup>A</sup>T<sub>E</sub>X code where additional code can be added. For example, the L<sup>A</sup>T<sub>E</sub>X macro `\AtBeginDocument` adds code to a hook which is placed at the beginning of every document.

Several option keys of `tcolorbox` allow providing some code which is added to specific places of a colored box. For example, `/tcb/before upper`<sup>P. 72</sup> places code before the content of the upper part. A following usage of this key overwrites any prior settings.

The library  hooks extends `/tcb/before upper`<sup>P. 72</sup> and several more existing keys to “hookable” versions, e.g. `/tcb/before upper app`<sup>P. 472</sup> and `/tcb/before upper pre`<sup>P. 472</sup>. The “hookable” keys don’t overwrite prior settings but either *append* or *prepend* the newly given code to the existing code.

The general naming convention (with some small exceptions) is:

- `<option key> app`: works like `<option key>` but *appends* its code to the existing code.
- `<option key> pre`: works like `<option key>` but *prepends* its code to the existing code.

If the original `<option key>` is used (again), all code will be overwritten. Therefore, the order of the option key usage is crucial.

```
% \usepackage{array,tabularx}
\newcolumntype{Y}{>{\raggedleft\arraybackslash}X}% see tabularx
\tcbset{enhanced,fonttitle=\bfseries\large,fontupper=\normalsize\sffamily,
colback=yellow!10!white,colframe=red!50!black,colbacktitle=Salmon!30!white,
coltitle=black,center title,
tabularx={X||Y|Y|Y||Y},% this sets `before upper' and `after upper'
before upper app={Group & One & Two & Three & Four & Sum\\\hline\hline} }
```

```
\begin{tcolorbox}[title=My table]
Red  & 1000.00 & 2000.00 & 3000.00 & 4000.00 & 10000.00\\\hline
Green & 2000.00 & 3000.00 & 4000.00 & 5000.00 & 14000.00\\\hline
Blue  & 3000.00 & 4000.00 & 5000.00 & 6000.00 & 18000.00\\\hline\hline
Sum   & 6000.00 & 9000.00 & 12000.00 & 15000.00 & 42000.00
\end{tcolorbox}
```

My table

Group	One	Two	Three	Four	Sum
Red	1000.00	2000.00	3000.00	4000.00	10000.00
Green	2000.00	3000.00	4000.00	5000.00	14000.00
Blue	3000.00	4000.00	5000.00	6000.00	18000.00
Sum	6000.00	9000.00	12000.00	15000.00	42000.00

## 23.2 Box Content Additions

The following option keys extend the options given in Subsection 4.11 from page 71.

**/tcb/before title app=⟨code⟩** (no default)

Appends the given ⟨code⟩ to /tcb/before title<sup>→ P. 71</sup> after the color and font settings and before the content of the title.

**/tcb/before title pre=⟨code⟩** (no default)

Prepends the given ⟨code⟩ to /tcb/before title<sup>→ P. 71</sup> after the color and font settings and before the content of the title.

**/tcb/after title app=⟨code⟩** (no default)

Appends the given ⟨code⟩ to /tcb/after title<sup>→ P. 71</sup> after the content of the title.

**/tcb/after title pre=⟨code⟩** (no default)

Prepends the given ⟨code⟩ to /tcb/after title<sup>→ P. 71</sup> after the content of the title.

**/tcb/before upper app=⟨code⟩** (no default)

Appends the given ⟨code⟩ to /tcb/before upper<sup>→ P. 72</sup> or /tcb/before upper\*<sup>→ P. 72</sup> after the color and font settings and before the content of the upper part.

**/tcb/before upper pre=⟨code⟩** (no default)

Prepends the given ⟨code⟩ to /tcb/before upper<sup>→ P. 72</sup> or /tcb/before upper\*<sup>→ P. 72</sup> after the color and font settings and before the content of the upper part.

**/tcb/after upper app=⟨code⟩** (no default)

Appends the given ⟨code⟩ to /tcb/after upper<sup>→ P. 73</sup> or /tcb/after upper\*<sup>→ P. 73</sup> after the content of the upper part.

**/tcb/after upper pre=⟨code⟩** (no default)

Prepends the given ⟨code⟩ to /tcb/after upper<sup>→ P. 73</sup> or /tcb/after upper\*<sup>→ P. 73</sup> after the content of the upper part.

```
% \tcbuselibrary{theorems}

\begin{tcolorbox}[
  ams align,% this sets `before upper*' and `after upper*'
  colback=yellow!10!white,colframe=red!50!black,
  before upper app={\frac{2}{\sqrt{2}}\sqrt{2}.\\},
  after upper pre={\sin(\frac{\pi}{2})=1.},
]
\sum_{n=1}^{\infty} \frac{1}{n} = \infty.
\int x^2 dx = \frac{1}{3}x^3 + c.
\end{tcolorbox}
```

$$\frac{2}{\sqrt{2}} = \sqrt{2}. \quad (22)$$

$$\sum_{n=1}^{\infty} \frac{1}{n} = \infty. \quad (23)$$

$$\int x^2 dx = \frac{1}{3}x^3 + c. \quad (24)$$

$$\sin\left(\frac{\pi}{2}\right) = 1. \quad (25)$$

**/tcb/before lower app=⟨code⟩** (no default)

Appends the given ⟨code⟩ to /tcb/before lower<sup>→ P. 74</sup> or /tcb/before lower\*<sup>→ P. 74</sup> *after* the color and font settings and *before* the content of the lower part.

**/tcb/before lower pre=⟨code⟩** (no default)

Prepends the given ⟨code⟩ to /tcb/before lower<sup>→ P. 74</sup> or /tcb/before lower\*<sup>→ P. 74</sup> *after* the color and font settings and *before* the content of the lower part.

**/tcb/after lower app=⟨code⟩** (no default)

Appends the given ⟨code⟩ to /tcb/after lower<sup>→ P. 75</sup> or /tcb/after lower\*<sup>→ P. 75</sup> *after* the content of the lower part.

**/tcb/after lower pre=⟨code⟩** (no default)

Prepends the given ⟨code⟩ to /tcb/after lower<sup>→ P. 75</sup> or /tcb/after lower\*<sup>→ P. 75</sup> *after* the content of the lower part.

N 2023-11-13 `/tcb/environment title app=<name>` (style)  
N 2023-11-13 `/tcb/environment title args app={<name>}{{<code>}}` (style)

This shortcut style sets `/tcb/before title app`<sup>→ P. 472</sup> to `\begin{<name>}` and `/tcb/after title pre`<sup>→ P. 472</sup> to `\end{<name>}`, i.e. the title text is enclosed by the environment `<name>`. The second variant also places `<code>` after `\begin{<name>}`. Note that you may need *additional* brackets around `<code>`, if `<code>` contains some parameter(s) for the environment `<name>`.

N 2023-11-13 `/tcb/environment title pre=<name>` (style)  
N 2023-11-13 `/tcb/environment title args pre={<name>}{{<code>}}` (style)

This shortcut style sets `/tcb/before title pre`<sup>→ P. 472</sup> to `\begin{<name>}` and `/tcb/after title app`<sup>→ P. 472</sup> to `\end{<name>}`, i.e. the title text is enclosed by the environment `<name>`. The second variant also places `<code>` after `\begin{<name>}`. Note that you may need *additional* brackets around `<code>`, if `<code>` contains some parameter(s) for the environment `<name>`.

N 2023-11-13 `/tcb/environment upper app=<name>` (style)  
N 2023-11-13 `/tcb/environment upper args app={<name>}{{<code>}}` (style)

This shortcut style sets `/tcb/before upper app`<sup>→ P. 472</sup> to `\begin{<name>}` and `/tcb/after upper pre`<sup>→ P. 472</sup> to `\end{<name>}`, i.e. the upper part is enclosed by the environment `<name>`. The second variant also places `<code>` after `\begin{<name>}`. Note that you may need *additional* brackets around `<code>`, if `<code>` contains some parameter(s) for the environment `<name>`.

N 2023-11-13 `/tcb/environment upper pre=<name>` (style)  
N 2023-11-13 `/tcb/environment upper args pre={<name>}{{<code>}}` (style)

This shortcut style sets `/tcb/before upper pre`<sup>→ P. 472</sup> to `\begin{<name>}` and `/tcb/after upper app`<sup>→ P. 472</sup> to `\end{<name>}`, i.e. the upper part is enclosed by the environment `<name>`. The second variant also places `<code>` after `\begin{<name>}`. Note that you may need *additional* brackets around `<code>`, if `<code>` contains some parameter(s) for the environment `<name>`.

N 2023-11-13 `/tcb/environment lower app=<name>` (style)  
N 2023-11-13 `/tcb/environment lower args app={<name>}{{<code>}}` (style)

This shortcut style sets `/tcb/before lower app`<sup>→ P. 473</sup> to `\begin{<name>}` and `/tcb/after lower pre`<sup>→ P. 473</sup> to `\end{<name>}`, i.e. the lower part is enclosed by the environment `<name>`. The second variant also places `<code>` after `\begin{<name>}`. Note that you may need *additional* brackets around `<code>`, if `<code>` contains some parameter(s) for the environment `<name>`.

N 2023-11-13 `/tcb/environment lower pre=<name>` (style)  
N 2023-11-13 `/tcb/environment lower args pre={<name>}{{<code>}}` (style)

This shortcut style sets `/tcb/before lower pre`<sup>→ P. 473</sup> to `\begin{<name>}` and `/tcb/after lower app`<sup>→ P. 473</sup> to `\end{<name>}`, i.e. the lower part is enclosed by the environment `<name>`. The second variant also places `<code>` after `\begin{<name>}`. Note that you may need *additional* brackets around `<code>`, if `<code>` contains some parameter(s) for the environment `<name>`.

### 23.3 Embedding into the Surroundings

The following option keys extend the options given in Subsection 4.14 from page 90.

! The “hookable” versions are usable inside the document. In the preamble, they can only be used after explicit setting of `/tcb/before→ P. 90` and `/tcb/after→ P. 90` or by e.g. `/tcb/parskip→ P. 94`.

`/tcb/before app=<code>` (no default)

Appends the given `<code>` to `/tcb/before→ P. 90` before the colored box.

`/tcb/before pre=<code>` (no default)

Prepends the given `<code>` to `/tcb/before→ P. 90` before the colored box.

`/tcb/after app=<code>` (no default)

Appends the given `<code>` to `/tcb/after→ P. 90` after the colored box.

`/tcb/after pre=<code>` (no default)

Prepends the given `<code>` to `/tcb/after→ P. 90` after the colored box.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[title=My title,before app={The box follows:\\[4pt]},%
  after app={This is the end.}]
This is a \textbf{tcolorbox}.
\end{tcolorbox}
```

The box follows:

My title

This is a **tcolorbox**.

This is the end.

`/tcb/before float app=<code>` (no default)

Appends the given `<code>` to `/tcb/before float→ P. 89` before the colored box.

`/tcb/before float pre=<code>` (no default)

Prepends the given `<code>` to `/tcb/before float→ P. 89` before the colored box.

`/tcb/after float app=<code>` (no default)

Appends the given `<code>` to `/tcb/after float→ P. 89` after the colored box.

`/tcb/after float pre=<code>` (no default)

Prepends the given `<code>` to `/tcb/after float→ P. 89` after the colored box.

## 23.4 Overlays

The following option keys extend the options given in Subsection 4.12 from page 83.


`/tcb/overlay app=<graphical code>` (no default)

Appends the given `<graphical code>` to `/tcb/overlay`<sup>P.83</sup>.

```
% \usetikzlibrary{patterns} % preamble
% \tcbsuselibrary{skins} % preamble
\tcbsset{frogbox/.style={enhanced,colback=green!10,colframe=green!65!black,
enlarge top by=5.5mm,
overlay={\foreach \x in {2cm,3.5cm} {
\begin{scope}[shift={[xshift=\x]frame.north west}]}
\path[draw=green!65!black,fill=green!10,line width=1mm] (0,0) arc (0:180:5mm);
\path[fill=black] (-0.2,0) arc (0:180:1mm);
\end{scope}}}}
\tcbsset{ribbon/.style={overlay app={%
\path[fill=blue!75!white,draw=blue,double=white!85!blue,
preaction={opacity=0.6,fill=blue!75!white},
line width=0.1mm,double distance=0.2mm,
pattern=fivepointed stars,pattern color=white!75!blue]
([xshift=-0.2mm,yshift=-1.02cm]frame.north east)
-- ++(-1,1) -- ++(-0.5,0) -- +(1.5,-1.5) -- cycle;}}}

\begin{tcolorbox}[frogbox,title=My title]
This is a \textbf{tcolorbox}.
\end{tcolorbox}

\begin{tcolorbox}[frogbox,ribbon,title=My title]
This is a \textbf{tcolorbox}. \par
Here, we apply a second overlay.
\end{tcolorbox}
```

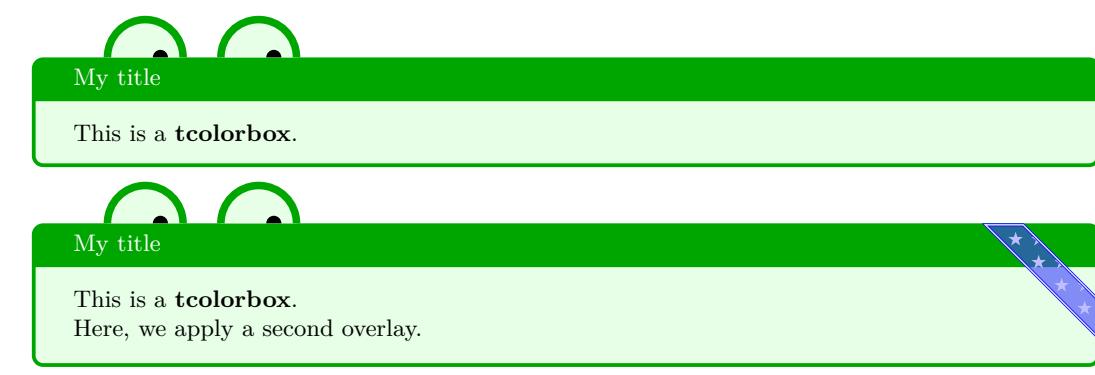

`/tcb/overlay pre=<graphical code>` (no default)

Prepends the given `<graphical code>` to `/tcb/overlay`<sup>P.83</sup>.

`/tcb/overlay unbroken app=<graphical code>` (no default)

Appends the given `<graphical code>` to `/tcb/overlay unbroken`<sup>P.84</sup>.

`/tcb/overlay unbroken pre=<graphical code>` (no default)

Prepends the given `<graphical code>` to `/tcb/overlay unbroken`<sup>P.84</sup>.

`/tcb/overlay first app=<graphical code>` (no default)

Appends the given `<graphical code>` to `/tcb/overlay first`<sup>P.84</sup>.

`/tcb/overlay first pre=<graphical code>` (no default)

Prepends the given `<graphical code>` to `/tcb/overlay first`<sup>P.84</sup>.

<code>/tcb/overlay middle app=&lt;graphical code&gt;</code>	(no default)
Appends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay middle</code> <sup>→P.84</sup> .	
<code>/tcb/overlay middle pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay middle</code> <sup>→P.84</sup> .	
<code>/tcb/overlay last app=&lt;graphical code&gt;</code>	(no default)
Appends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay last</code> <sup>→P.84</sup> .	
<code>/tcb/overlay last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay last</code> <sup>→P.84</sup> .	
<code>/tcb/overlay broken app=&lt;graphical code&gt;</code>	(no default)
Appends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay broken</code> <sup>→P.84</sup> .	
<code>/tcb/overlay broken pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay broken</code> <sup>→P.84</sup> .	
<code>/tcb/overlay unbroken and first app=&lt;graphical code&gt;</code>	(no default)
Appends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay unbroken and first</code> <sup>→P.84</sup> .	
<code>/tcb/overlay unbroken and first pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay unbroken and first</code> <sup>→P.84</sup> .	
<code>/tcb/overlay middle and last app=&lt;graphical code&gt;</code>	(no default)
Appends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay middle and last</code> <sup>→P.84</sup> .	
<code>/tcb/overlay middle and last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay middle and last</code> <sup>→P.84</sup> .	
<code>/tcb/overlay unbroken and last app=&lt;graphical code&gt;</code>	(no default)
Appends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay unbroken and last</code> <sup>→P.84</sup> .	
<code>/tcb/overlay unbroken and last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay unbroken and last</code> <sup>→P.84</sup> .	
<code>N 2014-09-19 /tcb/overlay first and middle app=&lt;graphical code&gt;</code>	(no default)
Appends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay first and middle</code> <sup>→P.84</sup> .	
<code>N 2014-09-19 /tcb/overlay first and middle pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/overlay first and middle</code> <sup>→P.84</sup> .	

## 23.5 Watermarks

The following option keys extend the options given in Subsection 10.3 from page 191.

! Watermarks are special overlays. The `LIB hooks` library allows the combination of several watermarks and overlays.

`/tcb/watermark text app=<text>` (no default)

Appends a `/tcb/watermark text`<sup>→ P. 191</sup> to the colored box.

```
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries}

\begin{tcolorbox}[enhanced,title=My title,watermark graphics=Basilica_5.png,
  watermark opacity=0.25,
  watermark text app=Basilica,watermark color=Navy
]
\lipsum[1-2]
\tcblower
This example uses a public domain picture from\
\url{http://commons.wikimedia.org/wiki/File:Basilica_5.png}
\end{tcolorbox}
```

My title

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

This example uses a public domain picture from  
[http://commons.wikimedia.org/wiki/File:Basilica\\_5.png](http://commons.wikimedia.org/wiki/File:Basilica_5.png)

`/tcb/watermark text pre=<text>` (no default)

Prepends a `/tcb/watermark text`<sup>→ P. 191</sup> to the colored box.

`/tcb/watermark text app on=<part> is <text>` (no default)

Appends a `/tcb/watermark text on`<sup>→ P. 191</sup> the named `<part>` of a break sequence.

`/tcb/watermark text pre on=<part> is <text>` (no default)

Prepends a `/tcb/watermark text on`<sup>→ P. 191</sup> the named `<part>` of a break sequence.

**/tcb/watermark graphics app=**<file name> (no default)

Appends a /tcb/watermark graphics<sup>→ P. 192</sup> referenced by <file name> to the colored box.

**/tcb/watermark graphics pre=**<file name> (no default)

Prepends a /tcb/watermark graphics<sup>→ P. 192</sup> referenced by <file name> to the colored box.

**/tcb/watermark graphics app on=**<part> **is** <file name> (no default)

Appends a /tcb/watermark graphics on<sup>→ P. 192</sup> the named <part> of a break sequence. The picture is referenced by <file name>.

**/tcb/watermark graphics pre on=**<part> **is** <file name> (no default)

Prepends a /tcb/watermark graphics on<sup>→ P. 192</sup> the named <part> of a break sequence. The picture is referenced by <file name>.

**/tcb/watermark tikz app=**<graphical code> (no default)

Appends a /tcb/watermark tikz<sup>→ P. 193</sup> with the given tikz <graphical code> to the colored box.

**/tcb/watermark tikz pre=**<graphical code> (no default)

Prepends a /tcb/watermark tikz<sup>→ P. 193</sup> with the given tikz <graphical code> to the colored box.

```
% \tcbuselibrary{skins}
\tcbset{colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,
watermark color=Navy,watermark opacity=0.25,
smiley/.style={watermark tikz pre={%
\path[fill=yellow,draw=yellow!75!red] (0,0) circle (1cm);
\fill[red] (45:5mm) circle (1mm);
\fill[red] (135:5mm) circle (1mm);
\draw[line width=1mm,red] (215:5mm) arc (215:325:5mm);}}}

\begin{tcolorbox}[enhanced,title=My title, watermark text=Watermark,
smiley]
\lipsum[1-2]
\end{tcolorbox}
```

### My title

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

**/tcb/watermark tikz app on=**<part> **is** <graphical code> (no default)

Appends a /tcb/watermark tikz on<sup>→ P. 193</sup> the named <part> of a break sequence.

**/tcb/watermark tikz pre on=**<part> **is** <graphical code> (no default)

Prepends a /tcb/watermark tikz on<sup>→ P. 193</sup> the named <part> of a break sequence.

## 23.6 Underlays

The following option keys extend the options given in 10.8 on page 221. There are no `app` type keys since underlays are stackable by default.

<code>/tcb/underlay pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay</code> <sup>→ P. 221</sup> .	
<code>/tcb/underlay unbroken pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay unbroken</code> <sup>→ P. 222</sup> .	
<code>/tcb/underlay first pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay first</code> <sup>→ P. 222</sup> .	
<code>/tcb/underlay middle pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay middle</code> <sup>→ P. 222</sup> .	
<code>/tcb/underlay last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay last</code> <sup>→ P. 222</sup> .	
<code>/tcb/underlay boxed title pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay boxed title</code> <sup>→ P. 222</sup> .	
<code>/tcb/underlay broken pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay broken</code> <sup>→ P. 222</sup> .	
<code>/tcb/underlay unbroken and first pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay unbroken and first</code> <sup>→ P. 222</sup> .	
<code>/tcb/underlay middle and last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay middle and last</code> <sup>→ P. 222</sup> .	
<code>/tcb/underlay unbroken and last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay unbroken and last</code> <sup>→ P. 222</sup> .	
<code>/tcb/underlay first and middle pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/underlay first and middle</code> <sup>→ P. 222</sup> .	

N 2014-09-19

## 23.7 Finishes

The following option keys extend the options given in 10.9 on page 223. There are no `app` type keys since finishes are stackable by default.

<code>/tcb/finish pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish</code> <sup>→ P. 223</sup> .	
<code>/tcb/finish unbroken pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish unbroken</code> <sup>→ P. 224</sup> .	
<code>/tcb/finish first pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish first</code> <sup>→ P. 224</sup> .	
<code>/tcb/finish middle pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish middle</code> <sup>→ P. 224</sup> .	
<code>/tcb/finish last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish last</code> <sup>→ P. 224</sup> .	
<code>/tcb/finish broken pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish broken</code> <sup>→ P. 224</sup> .	
<code>/tcb/finish unbroken and first pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish unbroken and first</code> <sup>→ P. 224</sup> .	
<code>/tcb/finish middle and last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish middle and last</code> <sup>→ P. 224</sup> .	
<code>/tcb/finish unbroken and last pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish unbroken and last</code> <sup>→ P. 224</sup> .	
<code>/tcb/finish first and middle pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/finish first and middle</code> <sup>→ P. 224</sup> .	

## 23.8 Skin Code

The following option keys extend the options given in Subsection 9.2 from page 161.

<code>/tcb/frame code app=&lt;graphical code&gt;</code>	(no default)
Appends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/frame code</code> <sup>→ P. 161</sup> .	
<code>/tcb/frame code pre=&lt;graphical code&gt;</code>	(no default)
Prepends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/frame code</code> <sup>→ P. 161</sup> .	
<code>/tcb/interior titled code app=&lt;graphical code&gt;</code>	(no default)
Appends the given <code>&lt;graphical code&gt;</code> to <code>/tcb/interior titled code</code> <sup>→ P. 161</sup> .	

N 2014-09-19

```
\begin{tcolorbox}[title=My title,enhanced,colframe=Navy,
  frame code app={\draw[yellow,line width=1cm] (
    frame.south west)--(frame.north east);},
  interior titled code app={\draw[red,line width=1cm]
  (frame.north west)--(frame.south east);},
]
\lipsum[1]
\end{tcolorbox}
```

My title

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetuer id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

**/tcb/interior titled code pre=<graphical code>** (no default)

Prepends the given *<graphical code>* to /tcb/interior titled code<sup>→ P. 161</sup>.

**/tcb/interior code app=<graphical code>** (no default)

Appends the given *<graphical code>* to /tcb/interior code<sup>→ P. 162</sup>.

**/tcb/interior code pre=<graphical code>** (no default)

Prepends the given *<graphical code>* to /tcb/interior code<sup>→ P. 162</sup>.

**/tcb/segmentation code app=<graphical code>** (no default)

Appends the given *<graphical code>* to /tcb/segmentation code<sup>→ P. 162</sup>.

**/tcb/segmentation code pre=<graphical code>** (no default)

Prepends the given *<graphical code>* to /tcb/segmentation code<sup>→ P. 162</sup>.

**/tcb/title code app=<graphical code>** (no default)

Appends the given *<graphical code>* to /tcb/title code<sup>→ P. 163</sup>.

**/tcb/title code pre=<graphical code>** (no default)

Prepends the given *<graphical code>* to /tcb/title code<sup>→ P. 163</sup>.

## 23.9 Extras

The following option keys extend the options given in 19.5 on page 415. There are no `app` type keys since extras are stackable by default.

N 2015-07-16	<code>/tcb/extras pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras</code> <sup>→ P. 415</sup> .	
N 2015-07-16	<code>/tcb/extras unbroken pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras unbroken</code> <sup>→ P. 415</sup> .	
N 2015-07-16	<code>/tcb/extras first pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras first</code> <sup>→ P. 415</sup> .	
N 2015-07-16	<code>/tcb/extras middle pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras middle</code> <sup>→ P. 415</sup> .	
N 2015-07-16	<code>/tcb/extras last pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras last</code> <sup>→ P. 415</sup> .	
N 2015-07-16	<code>/tcb/extras broken pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras broken</code> <sup>→ P. 415</sup> .	
N 2015-07-16	<code>/tcb/extras unbroken and first pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras unbroken and first</code> <sup>→ P. 415</sup> .	
N 2015-07-16	<code>/tcb/extras middle and last pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras middle and last</code> <sup>→ P. 415</sup> .	
N 2015-07-16	<code>/tcb/extras unbroken and last pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras unbroken and last</code> <sup>→ P. 415</sup> .	
N 2015-07-16	<code>/tcb/extras first and middle pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/extras first and middle</code> <sup>→ P. 416</sup> .	

## 23.10 Listings

The following option keys extend the options given in Section 17 from page 333.

N 2019-07-11	<code>/tcb/listing options app={⟨options⟩}</code>	(no default)
	Appends the given <code>⟨options⟩</code> to <code>/tcb/listing options</code> <sup>→ P. 343</sup> .	
N 2019-07-11	<code>/tcb/listing options pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/listing options</code> <sup>→ P. 343</sup> .	
N 2019-07-11	<code>/tcb/minted options app={⟨options⟩}</code>	(no default)
	Appends the given <code>⟨options⟩</code> to <code>/tcb/minted options</code> <sup>→ P. 346</sup> .	
N 2019-07-11	<code>/tcb/minted options pre={⟨options⟩}</code>	(no default)
	Prepends the given <code>⟨options⟩</code> to <code>/tcb/minted options</code> <sup>→ P. 346</sup> .	

## 24 Library

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{xparse}
```

This loads the package `xparse` <sup>→ CTAN</sup> [14].

Note that up to version 5.0.2 this library contained code which needed the `xparse` <sup>→ CTAN</sup> package. Since nowadays this package has become basically a part of the L<sup>A</sup>T<sub>E</sub>X kernel, the code of the library was migrated to other parts of the `tcolorbox` package. So, the remaining library is nearly a stub which only loads `xparse`.

Instead of including the `xparse` library, it is recommended to include the `xparse` <sup>→ CTAN</sup> package directly, **if really needed** (the L<sup>A</sup>T<sub>E</sub>X kernel contains essentially everything needed). The library is kept for compatibility.

The library is loaded by a package option or inside the preamble by:

```
\tcbuslibrary{external}
```

The purpose of this library is to support externalization of document snippets like graphics or boxes which can be compiled stand-alone. These snippets are written to external files, compiled and the resulting pdf files are included to the main document as images. The whole procedure saves compilation time, if such a snippet is costly to compile but needs to compile just once or very seldom.

There are very good alternatives to this library. One should consider the `standalone`<sup>→ CTAN</sup> package or the TikZ externalization library instead. The  `external` library is something in between and can be seen as poor man variant of the TikZ externalization library.

The main differences between TikZ externalization and  `external` are:

- TikZ `external` compiles the whole original document in a sophisticated way while  `external` uses only the preamble or a part of the preamble of the original document.
- TikZ `external` can automatically externalize all `tikzpicture` environments while  `external` externalizes marked snippets only.
- Code snippets to be externalized by  `external` are not restricted to `tikzpicture` environments. But these snippets have to be stand-alone without dependencies to the rest of the document.

Why should somebody use  `external` instead of the more powerful TikZ `external`? One reason could be compilation speed, but the main reason for creating the library at all was that TikZ `external` tends to choke on complicated documents where the sophisticated mechanism stumbles. Since  `external` does not use the original document body for compilation, this cannot happen.



Source snippets are compiled, if their `md5` checksum has changed. They are not compiled automatically, if option settings are changed or anything outside the snippet is changed. Use `/tcb/external/force remake`<sup>→ P. 486</sup> to force compilation in this case or simply delete the externalized pdf oder md5 files.



To use the externalization options, the compiler has to be called with the `-shell-escape` permission to authorize potentially dangerous system calls. Be warned that this is a security risk.

## 25.1 Preparation of a Document for Externalization

The preamble of the main document has to contain the `\tcbEXTERNALIZE` command. Without this command, no externalization operation will be executed.

N 2015-03-11

### \tcbEXTERNALIZE

It is mandatory for externalization that this command is used once in the preamble of the main document. Every setting *before* `\tcbEXTERNALIZE` will also be used for compiling an external snippet. Every setting *after* `\tcbEXTERNALIZE` will be ignored for compiling an external snippet. Place this command right before `\begin{document}`, if you are not absolutely sure about another place.

The main document has to look like the following:

```
\documentclass[a4paper]{book}%
% for example
\usepackage{...}%
%
% ...
% Typically, all or the very most settings for the document.

\tcbEXTERNALIZE% Typically, just before \begin{document}

% Additional settings which are ABSOLUTELY irrelevant for the
% stand-alone snippets.
%
\begin{document}
% The document.
% This also contains the marked snippets for externalization.
\end{document}
```

During compilation, a `/tcb/external/runner` file is dynamically created (several times). This is the actual main file for compiling an externalized snippet.

N 2015-03-11

`/tcb/external/runner=<file name>` (no default, initially `\jobname_run.tex`)

Sets the `<file name>` for dynamically created `runner` file. This is the actual main file for a document snippet. Typically, the initial setting is not needed to be changed.

```
\tcbset{external/runner=myrunner.tex}
```

N 2015-03-11

`/tcb/external/prefix=<text>` (no default, initially `external/`)

The `<text>` is prefixed to any `/tcb/external/name`<sup>P. 488</sup> for an externalization snippet. The initial setting implies saving all snippets into an `external/` subdirectory. Depending on the operation system, the subdirectory may have to be created manually once.

```
% Use a 'real' prefix instead of writing into a subdirectory:
\tcbset{external/prefix=ext_}
```

N 2015-03-11

`/tcb/external/externalize=true|false` (default `true`, initially `true`)

If set to `true`, the marked snippets are compiled if necessary. If set to `false`, the marked snippets are not compiled but included as text. `/tcb/external/externalize` can only be used after `\tcbEXTERNALIZE`.

N 2015-03-11

`/tcb/external/force remake=true|false` (default `true`, initially `false`)

If set to `true`, the marked snippets are always compiled. If set to `true`, the marked snippets are compiled only if necessary. The necessity is given, if a compiled pdf file is missing or the `md5` checksum of the source snippet has changed.

N 2015-03-11

`/tcb/external/!` (style)

Shortcut for setting `/tcb/external/force remake` to `true`.

U 2017-02-24

`/tcb/external/-` (style)

Shortcut for setting `/tcb/external/externalize` to `false`.


## 25.2 Marking Externalization Snippets

N 2015-03-11

```
\begin{tcbexternal}[(options)]{name}  
  <environment content>  
\end{tcbexternal}
```

Marks the environment content as a snippet for externalization. Typically, the content is a `tikzpicture` or something similar. It is important to note that the snippet should not have any dependencies with the rest of the document, e.g. referencing counters or setting counters is not possible. The `<name>` is automatically prefixed with `/tcb/external/prefix`<sup>P. 486</sup>. In combination, this has to be a unique file name. It is advised to not use spaces or umlauts for the name. The `<options>` are keys from the `/tcb/external/` key tree.

```
\begin{tcbexternal}{example_tikzpicture}  
  \begin{tikzpicture}  
    \path[fill=yellow!50!white] (0,0) circle (11mm);  
    \path[fill=white] (0,0) circle (9mm);  
    \foreach \w/\c in {90/red,210/green,330/blue}  
      {\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}  
  \end{tikzpicture}  
\end{tcbexternal}
```



If a `tcolorbox`<sup>P. 12</sup> is externalized, one should use `/tcb/nobeforeafter`<sup>P. 90</sup> for the box. Indention and distances to the text before and after have to be given separately outside the `tcbexternal` environment.

```
\noindent%  
\begin{tcbexternal}[minipage]{example_tcolorbox}  
  \begin{tcolorbox}[nobeforeafter,enhanced,  
    fonttitle=\bfseries,title=Externalized Box,  
    colframe=red!50!black,drop fuzzy shadow,  
    interior style={fill overzoom image=goldshade.png}]  
    This complete tcolorbox is externalized. One cannot use numbered  
    boxes here. Note the \texttt{minipage} option which tells the  
    current line width to the external snippet.  
  \end{tcolorbox}  
\end{tcbexternal}
```

### Externalized Box

This complete tcolorbox is externalized. One cannot use numbered boxes here. Note the `minipage` option which tells the current line width to the external snippet.

```

\begin{tcolorbox}[nobeforeafter,enhanced,
  fonttitle=\bfseries,title=Externalized Box,
  colframe=blue!50!black,
  interior style={fill overzoom image=blueshade.png}]
\begin{tcbexternal}[minipage]{example_tcolorbox2}
\color{white}%
The interior of the tcolorbox is externalized.
One can use numbered boxes without problems.
Note that the text color has to be set for the text manually
since it is converted into an image.
\end{tcbexternal}
\end{tcolorbox}

```

### Externalized Box

The interior of the tcolorbox is externalized. One can use numbered boxes without problems.  
Note that the text color has to be set for the text manually since it is converted into an image.

```

\begin{tcbexternal}[minipage]{example_tabularx}
\newcolumntype{Y}{>{\raggedleft\arraybackslash}X}%
\begin{tabularx}{\linewidth}{|l|Y|Y|Y||Y|}\hline
Group & One & Two & Three & Four & Sum\\\hline\hline
Red & 1000.00 & 2000.00 & 3000.00 & 4000.00 & 10000.00\\\hline
Green & 2000.00 & 3000.00 & 4000.00 & 5000.00 & 14000.00\\\hline
Blue & 3000.00 & 4000.00 & 5000.00 & 6000.00 & 18000.00\\\hline\hline
Sum & 6000.00 & 9000.00 & 12000.00 & 15000.00 & 42000.00\\\hline
\end{tabularx}
\end{tcbexternal}

```

Group	One	Two	Three	Four	Sum
Red	1000.00	2000.00	3000.00	4000.00	10000.00
Green	2000.00	3000.00	4000.00	5000.00	14000.00
Blue	3000.00	4000.00	5000.00	6000.00	18000.00
Sum	6000.00	9000.00	12000.00	15000.00	42000.00

N 2015-03-11

`/tcb/external/name=<name>` (no default, initially `unnamed`)

The `<name>` is automatically prefixed with `/tcb/external/prefix`<sup>P. 486</sup>. In combination, this has to be a unique file name for externalization. Typically, this key is not used directly but is set indirectly as mandatory parameter, see `tcbexternal`<sup>P. 487</sup>.

```
\begin{extcolorbox}[(options)]{<name>}[(tcolorbox options)]
  <environment content>
\end{extcolorbox}
```

This is an externalized version of `tcolorbox`<sup>→ P. 12</sup> created using `\newtcbexternalizetcolorbox`<sup>→ P. 494</sup>:

```
\newtcbexternalizetcolorbox{extcolorbox}{tcolorbox}{}{}
```

`<options>` and `<name>` are given to the underlying `tcbexternal`<sup>→ P. 487</sup> environment, while `<tcolorbox options>` are given to `tcolorbox`<sup>→ P. 12</sup>.

! Note that you should not redefine `/tcb/before`<sup>→ P. 90</sup> and `/tcb/after`<sup>→ P. 90</sup> inside the `<tcolorbox options>`, since the externalized version would not be identical to the non-externalized otherwise.

```
\begin{extcolorbox}[minipage]{example_extcolorbox}
  [ enhanced,colframe=red!50!black,colback=yellow!10,
    fonttitle=\bfseries,drop fuzzy shadow,
    title=My external box ]
```

This box is completely externalized.

```
\begin{tcolorbox}[colframe=blue,colback=blue!5,before skip=6pt]
  Inner box.
\end{tcolorbox}
\end{extcolorbox}
```

### My external box

This box is completely externalized.

Inner box.

- !
- **Never** externalize numbered boxes.
  - **Never** externalize boxes which contain references to other things, e.g. using `\ref` or `\cite`.
  - **Never** externalize breakable boxes.

N 2015-03-11


```
\begin{extikzpicture}[\langle options \rangle]{\langle name \rangle}[\langle tikz options \rangle]
  <environment content>
\end{extikzpicture}
```

This is an externalized version of `tikzpicture` created using  
`\newtcbexternalizeenvironment`<sup>→ P. 494</sup>:

```
\newtcbexternalizeenvironment{extikzpicture}{tikzpicture}{}{}{}
```

`\langle options \rangle` and `\langle name \rangle` are given to the underlying `tcbexternal`<sup>→ P. 487</sup> environment, while `\langle tikz options \rangle` are given to `tikzpicture`.

```
\begin{center}
\begin{extikzpicture}[
  preamble={\usepackage{pgfplots}}, % add package for external graph
  input source on error=false, % do not load source on error
]{example_pgfplots}
\pgfplotsset{width=12cm}
\begin{axis}[3d box=background,grid=major,
  xlabel=$x$, ylabel=$y$, zlabel=$z$, view/h=40,
  mesh/interior colormap name=hot,
  colormap/blackwhite,
  z buffer=sort,domain=0:90,y domain=0:60,
  zmin=0,zmax=2,z post scale=1.2,
]
\addplot3[surf,mesh/interior colormap name=blackwhite,
  colormap/hot,] ( {cos(x)},{sin(x)},{2*sin(y)} );
\addplot3[surf] ( {2*cos(x)*cos(y)},{2*sin(x)*cos(y)},{2*sin(y)} );
\end{axis}
\end{extikzpicture}
\end{center}
```

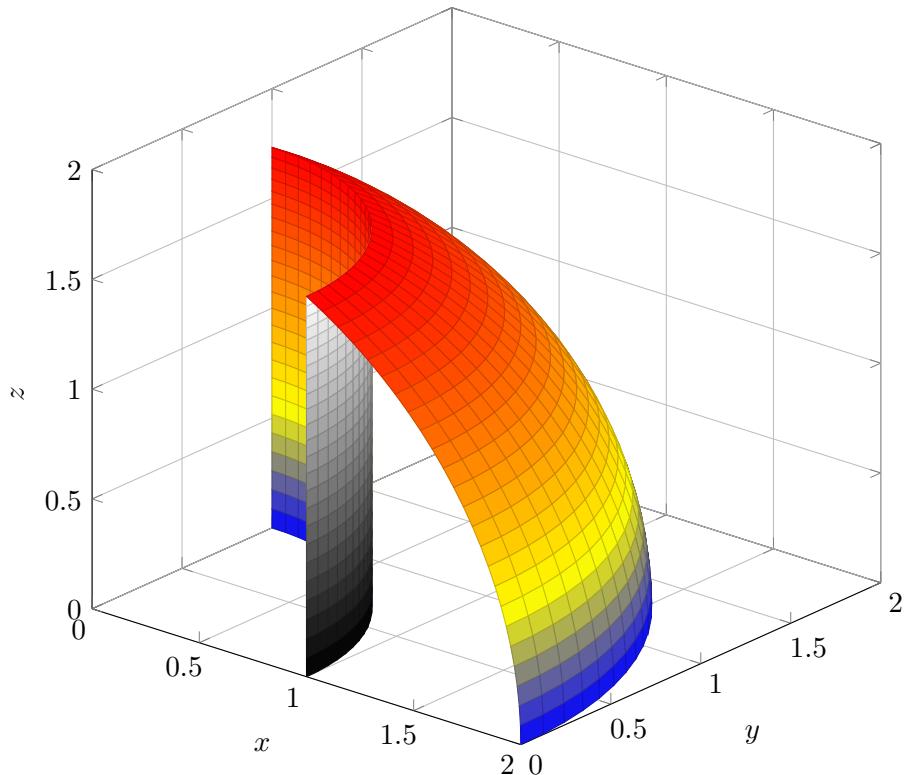


N 2015-03-11

/tcb/externalize listing=<name> (style, no default)

The text content of a `tcblisting`<sup>→ P. 334</sup> is externalized with the given <name>. Note that the listing part is not externalized.

```
\begin{tcblisting}{externalize listing=example_listing,
  bicolor,colback=yellow!10,colframe=yellow!50!black,
  colbacklower=white,center lower}
\begin{tikzpicture}
  \path[fill=yellow!50!white] (0,0) circle (11mm);
  \path[fill=white] (0,0) circle (9mm);
  \foreach \w/\c in {90/red,210/green,330/blue}
    {\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}
\end{tcblisting}
```

```
\begin{tikzpicture}
  \path[fill=yellow!50!white] (0,0) circle (11mm);
  \path[fill=white] (0,0) circle (9mm);
  \foreach \w/\c in {90/red,210/green,330/blue}
    {\path[shading=ball,ball color=\c] (\w:1cm) circle (7mm);}
\end{tikzpicture}
```



N 2015-03-11

/tcb/externalize listing!=<name> (style, no default)

Combination of /tcb/externalize listing and /tcb/external/force remake<sup>→ P. 486</sup>.

N 2015-03-11

/tcb/externalize example=<name> (style, no default)

The text content of a `dispExample*`<sup>→ P. 505</sup> is externalized with the given <name>. Note that the listing part is not externalized.

```
\begin{dispExample*}{sidebyside,externalize example=example_example}
\tikz\path[shading=ball,
  ball color=red] circle (7mm);
\end{dispExample*}
```

```
\tikz\path[shading=ball,
  ball color=red] circle (7mm);
```



N 2015-03-11

/tcb/externalize example!=<name> (style, no default)

Combination of /tcb/externalize example and /tcb/external/force remake<sup>→ P. 486</sup>.

### 25.3 Customization

N 2015-03-11 **/tcb/external/safety=⟨length⟩** (no default, initially 2mm)

The snippet box is surrounded with a safety border with a thickness of ⟨length⟩. This border is automatically trimmed during picture inclusion. The reason for this mechanism is to catch box content which extrudes over the bounding box. For example, shadows of a **tcolorbox** are painted outside the bounding box and would be lost otherwise.

N 2015-03-11 **/tcb/external/environment=⟨env⟩** (no default, initially unset)

Surrounds the exported snippet text with an environment ⟨env⟩ without parameters. Note that this option is ignored for **/tcb/externalize listing** →<sup>P. 491</sup>.

N 2015-05-05 **/tcb/external/environment with percent=true|false** (default true, initially true)

If set to **true**, the **\begin** and **\end** code of **/tcb/external/environment** is appended with a percent sign. For verbatim environments, this option typically has to be set to **false**.

N 2015-03-11 **/tcb/external/minipage=⟨length⟩** (default \linewidth, initially unset)

Surrounds the exported snippet text with a minipage. The optional ⟨length⟩ parameter sets the width of the minipage. Note that the default width is the current line width of the main document. See **tcbexternal** →<sup>P. 487</sup> for examples. Note that this option is ignored for **/tcb/externalize listing** →<sup>P. 491</sup>.

N 2015-03-11 **/tcb/external/plain** (no value, initially set)

Removes any text which was set to surround the snippet. This removes the setting of **/tcb/external/minipage**, but is independent of **/tcb/external/safety**.

N 2015-03-11 **/tcb/external/compiler=⟨text⟩** (no default, initially pdflatex)

Sets the name of the compiler for the snippets.

N 2015-03-11 **/tcb/external/runs=⟨number⟩** (no default, initially 1)

Sets the number of compiler runs for the snippet.

```
\begin{tcbexternal}[minipage,runs=2]{example_raster}
  \begin{tcbitemize}[raster equal height,
    size=small,colframe=red!50!black,colback=red!10!white]
    \tcbitem One
    \tcbitem \Huge Two
    \tcbitem Three
    \tcbitem Four
  \end{tcbitemize}
\end{tcbexternal}
```

One

TWO

Three

Four

N 2015-03-11 **/tcb/external/input source on error=true|false** (default true, initially true)

If set to **true**, the source code of the snippet is loaded instead of the failed pdf picture. Typically, this will lead to an error stop at the faulty place of the source and such helps detecting the cause. If the source input compiles without error, the document setup may be incorrect, see [Section 25.1](#) on page 486. Maybe, the **external/** subdirectory has to be created manually in this case, see **/tcb/external/prefix** →<sup>P. 486</sup>.

If the option is set to **false**, the compilation stops immediately on an error. The log file of the external snippet has to be consulted for error messages in this case.

N 2015-05-05 `/tcb/external/preclass=<code>` (no default, initially unset)

The given `<code>` is added before the snippet document. Typically, this means before `\documentclass`. This is not used for compilation of the main document.

N 2015-05-05 `/tcb/external/PassOptionsToPackage={<options>}{{<package>}}` (no default, initially unset)

The given `<options>` are passed to the given `<package>` for the snippet document. This is a shortcut for using `/tcb/external/preclass` with `\PassOptionsToPackage`. This not used for compilation of the main document.

N 2015-05-05 `/tcb/external/PassOptionsToClass={<options>}{{<class>}}` (no default, initially unset)

The given `<options>` are passed to the given `<class>` for the snippet document. This is a shortcut for using `/tcb/external/preclass` with `\PassOptionsToClass`. This not used for compilation of the main document.

N 2015-05-05 `/tcb/external/clear preclass` (no value)

Removes all additional `/tcb/external/preclass` settings.

N 2015-03-11 `/tcb/external/preamble=<code>` (no default, initially unset)

The given `<code>` is added to the preamble of the snippet document. This is not used for compilation of the main document.

N 2015-05-05 `/tcb/external/preamble tcbset=<options>` (no default, initially unset)

The given `<options>` are added as parameter for `\tcbset`<sup>P. 13</sup> to the preamble of the snippet document. This are not used for compilation of the main document.

N 2015-03-16 `/tcb/external/clear preamble` (no value)

Removes all additional `/tcb/external/preamble` settings.

N 2015-03-11 `\tcbifexternal{<true>}{{<false>}}`

Expands to `<true>`, if executed during snippet compilation, and to `<false>`, if executed during main document compilation. This can be used *before* `\tcbEXTERNALIZE`<sup>P. 486</sup> to give different setting to snippet and main document.

```
\tcbifexternal{
  \usepackage{onlyforexternal}
}[
  \usepackage{onlyformain}
]
```

N 2015-03-11

### \newtcbexternalizeenvironment{⟨newenv⟩}{⟨env⟩}{⟨options⟩}{⟨begin⟩}{⟨end⟩}

Creates a new environment ⟨newenv⟩ which is based on `tcbexternal`<sup>→ P. 487</sup>. This environment takes *at least* one optional parameter and one mandatory parameter. These two parameters are passed to `tcbexternal`<sup>→ P. 487</sup>. Further, the given ⟨options⟩ are always added to the option list of `tcbexternal`<sup>→ P. 487</sup>.

The environment content is externalized and the external snippet is surrounded by an environment ⟨env⟩. All further parameters of ⟨newenv⟩ are given to ⟨env⟩ as parameters. The included image is prepended by ⟨begin⟩ and appended by ⟨end⟩.

`extikzpicture`<sup>→ P. 490</sup> is an example application for `\newtcbexternalizeenvironment`.

```
\newtcbexternalizeenvironment{extabular}{tabular}{}{\par\centering}{\par}
\begin{extabular}{example_table}{|l|p{6cm}|r|}\hline
A & B & C\\\hline
a & This table is externalized as snippet. Obviously,
    this only makes sense for highly complex tables.
& b\\\hline
\end{extabular}
```

A	B	C
a	This table is externalized as snippet. Obviously, this only makes sense for highly complex tables.	b

N 2015-03-11

### \renewtcbexternalizeenvironment{⟨newenv⟩}{⟨env⟩}{⟨options⟩}{⟨begin⟩}{⟨end⟩}

Identical to `\newtcbexternalizeenvironment`, but the environment ⟨newenv⟩ is created by `\renewenvironment` instead of `\newenvironment`.

N 2015-03-11

### \newtcbexternalizetcolorbox{⟨newenv⟩}{⟨env⟩}{⟨options⟩}{⟨begin end options⟩}

Creates a new environment ⟨newenv⟩ which is based on `tcbexternal`<sup>→ P. 487</sup>. This environment takes *at least* one optional parameter and one mandatory parameter. These two parameters are passed to `tcbexternal`<sup>→ P. 487</sup>. Further, the given ⟨options⟩ are always added to the option list of `tcbexternal`<sup>→ P. 487</sup>.

The environment content is externalized and the external snippet is surrounded by an environment ⟨env⟩. All further parameters of ⟨newenv⟩ are given to ⟨env⟩ as parameters.

**In contrast to `\newtcbexternalizeenvironment`, the environment ⟨env⟩ is intended to be based on `tcolorbox`<sup>→ P. 12</sup> or `tcblisting`<sup>→ P. 334</sup>.**

The ⟨begin end options⟩ are options for settings the space before and after the included image using `/tcb/before`<sup>→ P. 90</sup>, `/tcb/before skip`<sup>→ P. 92</sup>, `/tcb/after`<sup>→ P. 90</sup>, or `/tcb/after skip`<sup>→ P. 92</sup>.

!

Use the exact identical values for `/tcb/before`<sup>→ P. 90</sup> and `/tcb/after`<sup>→ P. 90</sup> inside ⟨begin end options⟩ as they where used for definition of ⟨env⟩! Otherwise, externalized and non-externalized version will have different spacings.

`extcolorbox`<sup>→ P. 489</sup> is an example application for `\newtcbexternalizetcolorbox`.

*Definition in the preamble:*

```
\newtcblisting{myownlisting}[2][]{  
    enhanced,colback=red!5!white,colframe=red!75!black,fonttitle=\bfseries,  
    colbacktitle=red!50!yellow,before skip=6pt,after skip=6pt,  
    title={#2},#1}  
  
\newtcbexternalizetcolorbox{exmyownlisting}{myownlisting}%  
{minipage,environment with percent=false}%  
{before skip=6pt,after skip=6pt}% same values as for mylisting
```

```
\begin{exmyownlisting}[example_mylisting]{% <- name for the external file  
    {My externalized example box}  
This is my \LaTeX\ box.  
\end{exmyownlisting}
```

My externalized example box

This is my \LaTeX\ box.

This is my L<sup>A</sup>T<sub>E</sub>X box.

N 2015-03-11

**\renewtcbexternalizetcolorbox**{<newenv>}{{<env>}}{<options>}{<begin end options>}

Identical to **\newtcbexternalizetcolorbox**<sup>→ P. 494</sup>, but the environment <newenv> is created by **\renewenvironment** instead of **\newenvironment**.

N 2016-07-14

**\tcbiffleprocess**{<condition>}{{<source>}}{<md5-file>}{{<target>}}{<true>}{<false>}

This is a low-level macro which is internally used. The MD5 digest of a <source> file is compared with a stored MD5 digest from an auxiliary <md5-file>. If they are not equal, the auxiliary <md5-file> is updated to store the current MD5 digest. Further,

- if <condition> equals 0, <true> is executed.
- if <condition> equals 1:
  - If the current and stored MD5 digests were different, <true> is executed.
  - Otherwise, if the <target> file is not existing, <true> is executed.
  - Otherwise, if the <target> file is older than the <md5-file>, <true> is executed.
  - Otherwise, <false> is executed.
- if <condition> equals 2, <false> is executed.

The intended processing purpose of the <true> code is to produce a <target> file from the given <source> file.

## 25.4 Troubleshooting and FAQ

- I use the default settings, but the external subdirectory is not created.

Depending on operating system and compiler, an external subdirectory is automatically created or not. If not, create such a directory manually or add the following to your document:

```
\ExplSyntaxOn
\sys_shell_now:n { mkdir~external }
\ExplSyntaxOff
```

or

```
\ExplSyntaxOn
\sys_shell_now:n { mkdir~-p~external }
\ExplSyntaxOff
```

If the combination of `/tcb/external/prefix`<sup>→ P. 486</sup> and chosen snippet name points to another subdirectory than `external`, this has to be adapted.

- I use the `minted`<sup>→ CTAN</sup> package and I get a cache directory for every externalized snippet.

To avoid this problem, there are several ways.

- If you do not need `minted` inside the snippet code, you may use `\usepackage{minted}` after `\tcbEXTERNALIZE`<sup>→ P. 486</sup> or use `\tcbifexternal`<sup>→ P. 493</sup> to switch `minted` off for the external code. If `minted`<sup>→ CTAN</sup> is already included by another package, add the following to your preamble:

```
\tcbset{external/PassOptionsToPackage={draft}{minted}}
```

- If `minted` is needed for the snippet code, caching can be switched off by adding the following to your preamble:

```
\tcbset{external/PassOptionsToPackage={cache=false}{minted}}
```

Alternatively, the `cachedir` option of `minted` may be used to redirect the cache.

This library has the single purpose to support LATEX package documentations like this one. Actually, the visual nature follows the approach from Till Tantau's [pgf](#)<sup>→ CTAN</sup> [23] documentation. Typically, this library is assumed to be used in conjunction with the class [ltxdoc](#)<sup>→ CTAN</sup> or alike. Denis Bitouzé, Muzimuzhi, and many others provided very valuable input for this library.

The library is loaded by a package option or inside the preamble by:

```
\tcbuselibrary{documentation}
```

This also loads the library [skins](#), see 10 on page 172, the library [raster](#), see 16 on page 311, the library [listings](#), see 17 on page 333, and a bunch of packages, namely [makeidx](#)<sup>→ CTAN</sup>, [marginnote](#)<sup>→ CTAN</sup>, [refcount](#)<sup>→ CTAN</sup>, and [hyperref](#)<sup>→ CTAN</sup>. The packages [pifont](#)<sup>→ CTAN</sup> and [marvosym](#)<sup>→ CTAN</sup> should be installed for some symbols, but need not to be loaded.

! The package [makeidx](#)<sup>→ CTAN</sup> is loaded only, if [\printindex](#) is *not* already defined. Therefore, one can include an alternative to [makeidx](#)<sup>→ CTAN</sup> like [\imakeidx](#)<sup>→ CTAN</sup> before the library documentation is used.

! The package [marginnote](#)<sup>→ CTAN</sup> is loaded only, if [\marginnote](#) is *not* already defined.

! In contrast to other [tcolorbox](#) options, the option settings for [LIB documentation](#) are typically not getting reset by [/tcb/reset](#)<sup>→ P. 123</sup>, i.e. they keep their values for embedded boxes.

! In combination with DocStrip, [/tcb/verbatim ignore percent](#)<sup>→ P. 149</sup> may be helpful.

For UTF-8 support load (ignore this when using XeLATEX):

```
\tcbuselibrary{listingsutf8,documentation}
```

For [minted](#)<sup>→ CTAN</sup> [13] support, load:

```
\tcbuselibrary{documentation,minted}
\tcbset{listing engine=minted}
```

### 26.1 Macros of the Library

U 2020-04-22

```
\begin{docCommand}[\langle options \rangle]{\langle name \rangle}{\langle parameters \rangle}
  \langle command description \rangle
\end{docCommand}
```

Documents a LATEX macro with given *⟨name⟩* where *⟨name⟩* is written without backslash. The given *⟨options⟩* are set with [\tcbset](#)<sup>→ P. 13</sup>. This macro takes mandatory or optional *⟨parameters⟩*. It is automatically indexed and can be referenced with [\refCom](#)<sup>→ P. 508</sup>{⟨name⟩}.

```
\begin{docCommand}{foomakedocSubKey}{\marg{name}\marg[key path]}
  Creates a new environment \meta{name} based on \refEnv{docKey} for the
  documentation of keys with the given \meta{key path}.
\end{docCommand}
```

**\foomakedocSubKey{<name>}{<key path>}**

Creates a new environment *<name>* based on *docKey*<sup>P. 501</sup> for the documentation of keys with the given *<key path>*.

```
\begin{docCommand}[doc no index,color definition=blue]{section}%
  {\sarg\marg{title}}
  Starts a section. The star variant is unnumbered.
\end{docCommand}
```

**\section\*{<title>}**

Starts a section. The star variant is unnumbered.

**U** 2020-04-22

```
\begin{docCommand*}[\langle options\rangle]{<name>}{<parameters>}
  {command description}
\end{docCommand*}
```

Identical to *docCommand*<sup>P. 497</sup>, but without index entry.

**N** 2020-04-22

```
\begin{docCommands}[\langle options\rangle]{<variant1>},{<variant2>},...
  {command description}
\end{docCommands}
```

Documents several (similar) L<sup>A</sup>T<sub>E</sub>X macro variants simultaneously. The given *<options>* are set with *tcbset*<sup>P. 13</sup> and are valid for all variants and the documentation text. Every variant is described by an option set *<variant1>*, *<variant2>*, and so on. The most crucial options are */tcb/doc name*<sup>P. 511</sup> and */tcb/doc parameter*<sup>P. 511</sup>.

```
\begin{docCommands}[
  doc no index, % no index entries for this example
  doc name      = newtheorem
]
{
  { doc parameter = \sarg\marg{envname} },
  { doc parameter = \marg{envname}\oarg{numbered within} },
  { doc parameter = \oarg{numbered like}\marg{envname} }
}
example
\end{docCommands}
```

```
\newtheorem*{<envname>}
\newtheorem{<envname>}[<numbered within>]
\newtheorem[<numbered like>]{<envname>}
```

example

U 2020-04-22

```
\begin{docEnvironment}[\langle options \rangle]{\langle name \rangle}{\langle parameters \rangle}
  \langle environment description \rangle
\end{docEnvironment}
```

Documents a L<sup>A</sup>T<sub>E</sub>X environment with given *⟨name⟩*. The given *⟨options⟩* are set with `\tcbset`<sup>→ P. 13</sup>. This environment takes mandatory or optional *⟨parameters⟩*. It is automatically indexed and can be referenced with `\refEnv`<sup>→ P. 508</sup>{⟨name⟩}.

```
\begin{docEnvironment}{foocolorbox}{\oarg{options}}
  This is the main environment to create an accentuated colored text box with
  rounded corners and, optionally, two parts.
\end{docEnvironment}
```

```
\begin{foocolorbox}[\langle options \rangle]
  \langle environment description \rangle
\end{foocolorbox}
```

This is the main environment to create an accentuated colored text box with rounded corners and, optionally, two parts.

```
\begin{docEnvironment}%
  [doclang/environment content=My content text]%
  {foocolorbox*}{\oarg{options}}
  This is the main environment to create an accentuated colored text box with
  rounded corners and, optionally, two parts.
\end{docEnvironment}
```

```
\begin{foocolorbox*}[\langle options \rangle]
  \langle My content text \rangle
\end{foocolorbox*}
```

This is the main environment to create an accentuated colored text box with rounded corners and, optionally, two parts.

```
\begin{docEnvironment*}[\langle options \rangle]{\langle name \rangle}{\langle parameters \rangle}
  \langle environment description \rangle
\end{docEnvironment*}
```

Identical to `docEnvironment`, but without index entry.

```
\begin{docEnvironments}[\langle options \rangle]{\langle variant1 \rangle}, {\langle variant2 \rangle}, ...}
  <environment description>
\end{docEnvironments}
```

Documents several (similar) L<sup>A</sup>T<sub>E</sub>X environment variants simultaneously. The given *<options>* are set with `\tcbset`<sup>P. 13</sup> and are valid for all variants and the documentation text. Every variant is described by an option set *<variant1>*, *<variant2>*, and so on. The most crucial options are `/tcb/doc name`<sup>P. 511</sup> and `/tcb/doc` parameter<sup>P. 511</sup>.

```
\begin{docEnvironments}[
  doc no index,    % no index entries for this example
  doc parameter = \oarg{options}\marg{title},
  doclang/environment content = box content,
]
{
  {
    doc name      = redbox,
    doc description = a red colored box,
  },
  {
    doc name      = greenbox,
    doc description = a green colored box,
  },
  {
    doc name      = bluebox,
    doc description = a blue colored box,
  },
  {
    doc name      = custombox,
    doc parameter  = \oarg{options}\marg{color}\marg{title},
    doc description = a colored box,
  },
}
example
\end{docEnvironments}
```

\begin{redbox}[\langle options \rangle]{\langle title \rangle}	(a red colored box)
\begin{greenbox}[\langle options \rangle]{\langle title \rangle}	(a green colored box)
\begin{bluebox}[\langle options \rangle]{\langle title \rangle}	(a blue colored box)
\begin{custombox}[\langle options \rangle]{\langle color \rangle}{\langle title \rangle}	(a colored box)

example

**U** 2020-04-22

```
\begin{docKey}[\langle key path\rangle][\langle options\rangle]{\langle name\rangle}{\langle parameters\rangle}{\langle description\rangle}
  \langle key description\rangle
\end{docKey}
```

Documents a key with given  $\langle name \rangle$  and an optional  $\langle key path \rangle$ . The given  $\langle options \rangle$  are set with  $\text{\tcbset}^{\rightarrow P.13}$ . This key takes mandatory or optional  $\langle parameters \rangle$  as value with a short  $\langle description \rangle$ . It is automatically indexed and can be referenced with  $\text{\refKey}^{\rightarrow P.508}\{\langle name \rangle\}$ .

```
\begin{docKey}[foo]{footitle}{=\text{\meta{text}}}{no default, initially empty}
  Creates a heading line with \text{\meta{text}} as content.
\end{docKey}
```

$/\text{foo}/\text{footitle}=\langle text \rangle$	(no default, initially empty)
Creates a heading line with $\langle text \rangle$ as content.	

**U** 2020-04-22

```
\begin{docKey*}[\langle key path\rangle][\langle options\rangle]{\langle name\rangle}{\langle parameters\rangle}{\langle description\rangle}
  \langle key description\rangle
\end{docKey*}
```

Identical to `docKey`, but without index entry.

**N** 2020-04-22

```
\begin{docKeys}[\langle options\rangle]{\langle variant1\rangle}, {\langle variant2\rangle}, \dots
  \langle key description\rangle
\end{docKeys}
```

Documents several (similar) key variants simultaneously. The given  $\langle options \rangle$  are set with  $\text{\tcbset}^{\rightarrow P.13}$  and are valid for all variants and the documentation text. Every variant is described by an option set  $\langle variant1 \rangle$ ,  $\langle variant2 \rangle$ , and so on. The most crucial options are  $\text{/tcb/doc keypath}^{\rightarrow P.511}$ ,  $\text{/tcb/doc name}^{\rightarrow P.511}$ ,  $\text{/tcb/doc parameter}^{\rightarrow P.511}$ , and  $\text{/tcb/doc description}^{\rightarrow P.513}$ .

```
\begin{docKeys}[
  doc no index,    % no index entries for this example
  doc keypath      = mykeyroot,
  doc parameter   = {=\text{\meta{length}}},
]
{
  {
    doc name       = width,
    doc description = initially \text{\texttt{10cm}},
  },
  {
    doc name       = height,
    doc description = initially \text{\texttt{7cm}},
  },
}
example
\end{docKeys}
```

$/\text{mykeyroot}/\text{width}=\langle length \rangle$	(initially 10cm)
$/\text{mykeyroot}/\text{height}=\langle length \rangle$	(initially 7cm)
example	

N 2019-09-18  
U 2020-04-22

```
\begin{docPathOperation}[\langle options \rangle]{\langle name \rangle}{\langle parameters \rangle}
  \langle operation description \rangle
\end{docPathOperation}
```

Documents a TikZ path operation with given  $\langle name \rangle$ . The given  $\langle options \rangle$  are set with  $\tcbset^{\rightarrow P.13}$ . This TikZ path operation takes mandatory or optional  $\langle parameters \rangle$ . It is automatically indexed and can be referenced with  $\ref{PathOperation}\langle name \rangle$ .

```
\begin{docPathOperation}{fooop}{\oarg{opt}(\meta{name})\colOpt{at(\meta{coord})}}
  Imaginary path operation for illustration.
\end{docPathOperation}
```

```
\path ... \textcolor{red}{fooop}[\textcolor{green}{opt}](\textcolor{blue}{name})\textcolor{red}{at}(\textcolor{blue}{coord}) ...;
```

Imaginary path operation for illustration.

N 2019-09-18  
U 2020-04-22

```
\begin{docPathOperation*}[\langle options \rangle]{\langle name \rangle}{\langle parameters \rangle}
  \langle command description \rangle
\end{docPathOperation*}
```

Identical to `docPathOperation`, but without index entry.

N 2020-04-22

```
\begin{docPathOperations}[\langle options \rangle]{\{\langle variant1 \rangle\},\{\langle variant2 \rangle\},...}
  \langle command description \rangle
\end{docPathOperations}
```

Documents several (similar) TikZ path operation variants simultaneously. The given  $\langle options \rangle$  are set with  $\tcbset^{\rightarrow P.13}$  and are valid for all variants and the documentation text. Every variant is described by an option set  $\langle variant1 \rangle$ ,  $\langle variant2 \rangle$ , and so on. The most crucial options are `/tcb/doc name`  $\rightarrow P.511$  and `/tcb/doc parameter`  $\rightarrow P.511$ .

```
\begin{docPathOperations}[
  doc no index, % no index entries for this example
]
{
  {
    doc name      = rectangle,
    doc parameter = \meta{corner or cycle},
  },
  {
    doc name      = circle,
    doc parameter = \oarg{options},
  },
  {
    doc name      = ellipse,
    doc parameter = \oarg{options},
  },
}
example
\end{docPathOperations}
```

```
\path ... \textcolor{red}{rectangle}(\textcolor{blue}{corner or cycle}) ...;
\path ... \textcolor{red}{circle}[\textcolor{green}{options}] ...;
\path ... \textcolor{red}{ellipse}[\textcolor{green}{options}] ...;
```

example

U 2020-04-23

`\docValue[⟨options⟩]{⟨name⟩}`  
`\docValue*[⟨options⟩]{⟨name⟩}`

Documents a value with given *⟨name⟩*. Typically, this is a value for a key. The given *⟨options⟩* are set with  $\tcbset^{\rightarrow P.13}$ . This value is automatically indexed for `\docValue` and has no index entry for `\docValue*`.

A feasible value for `\refKey{/foo/footitle}` is `\docValue*{foovalue}`.

A feasible value for `/foo/footitle` $^{\rightarrow P.501}$  is `foovalue`.

U 2020-04-23

`\docAuxCommand[⟨options⟩]{⟨name⟩}`  
`\docAuxCommand*[⟨options⟩]{⟨name⟩}`

Documents an auxiliary or minor L<sup>A</sup>T<sub>E</sub>X macro with given *⟨name⟩* where *⟨name⟩* is written without backslash. The given *⟨options⟩* are set with  $\tcbset^{\rightarrow P.13}$ . This macro is automatically indexed for `\docAuxCommand` and has no index entry for `\docAuxCommand*`.

The macro `\docAuxCommand{fooaux}` holds some interesting data.

The macro `\fooaux` holds some interesting data.

U 2020-04-23

`\docAuxEnvironment[⟨options⟩]{⟨name⟩}`  
`\docAuxEnvironment*[⟨options⟩]{⟨name⟩}`

Documents an auxiliary or minor L<sup>A</sup>T<sub>E</sub>X environment with given *⟨name⟩*. The given *⟨options⟩* are set with  $\tcbset^{\rightarrow P.13}$ . This macro is automatically indexed for `\docAuxEnvironment` and has no index entry for `\docAuxEnvironment*`.

The environment `\docAuxEnvironment{fooauxenv}` holds some interesting data.

The environment `fooauxenv` holds some interesting data.

U 2020-04-23

`\docAuxKey[⟨key path⟩][⟨options⟩]{⟨name⟩}`  
`\docAuxKey*[⟨key path⟩][⟨options⟩]{⟨name⟩}`

Documents an auxiliary key with given *⟨name⟩* and an optional *⟨key path⟩*. The given *⟨options⟩* are set with  $\tcbset^{\rightarrow P.13}$ . It is automatically indexed for `\docAuxKey` and has no index entry for `\docAuxKey*`.

The key `\docAuxKey[foo]{fooaux}` holds some interesting data.

The key `/foo/fooaux` holds some interesting data.

U 2020-04-23

`\docCounter[⟨options⟩]{⟨name⟩}`  
`\docCounter*[⟨options⟩]{⟨name⟩}`

Documents a counter with given *⟨name⟩*. The given *⟨options⟩* are set with  $\tcbset^{\rightarrow P.13}$ . The counter is automatically indexed for `\docCounter` and has no index entry for `\docCounter*`.

The counter `\docCounter{foocounter}` can be used for computation.

The counter `foocounter` can be used for computation.

U 2020-04-23

`\docLength[⟨options⟩]{⟨name⟩}`  
`\docLength*[⟨options⟩]{⟨name⟩}`

Documents a length with given *⟨name⟩*. The given *⟨options⟩* are set with `\tcbset`<sup>→ P. 13</sup>. The length is automatically indexed for `\docLength` and has no index entry for `\docLength*`.

The length `\docLength{foolength}` can be used for computation.

The length `\foolength` can be used for computation.

U 2020-04-23

`\docColor[⟨options⟩]{⟨name⟩}`  
`\docColor*[⟨options⟩]{⟨name⟩}`

Documents a color with given *⟨name⟩*. The given *⟨options⟩* are set with `\tcbset`<sup>→ P. 13</sup>. The color is automatically indexed for `\docColor` and has no index entry for `\docColor*`.

The color `\docColor{foocolor}` is available.

The color `foocolor` is available.

`\cs{⟨name⟩}`

Macro from `ltxdoc` [4] to typeset a command word *⟨name⟩* where the backslash is prefixed. The library overwrites the original macro.

This is a `\cs{foocommand}`.

This is a `\foocommand`.

`\meta{⟨text⟩}`

Macro from `doc` [8] to typeset a meta *⟨text⟩*. The library overwrites the original macro.

This is a `\meta{text}`.

This is a *⟨text⟩*.

`\marg{⟨text⟩}`

Macro from `ltxdoc` [4] to typeset a *⟨text⟩* with curly brackets as a mandatory argument. The library overwrites the original macro.

This is a mandatory `\marg{argument}`.

This is a mandatory `{⟨argument⟩}`.

`\oarg{⟨text⟩}`

Macro from `ltxdoc` [4] to typeset a *⟨text⟩* with square brackets as an optional argument. The library overwrites the original macro.

This is an optional `\oarg{argument}`.

This is an optional `⟨argument⟩`.

N 2025-05-28

## \pbarg{<text>}

Renamed macro from the [24] documentation to typeset a *<text>* with pointed brackets as a mandatory argument.

```
This is a beamer \pbarg{argument}.
```

```
This is a beamer <argument>.
```

N 2023-02-16

## \sarg

Macro to typeset \* as an optional star.

```
This is an optional \sarg.
```

```
This is an optional *.
```

## \brackets{<text>}

Sets the given *<text>* with curly brackets.

```
Here we use \brackets{some text}.
```

```
Here we use {some text}.
```

U 2014-10-10

## \begin{dispExample}   *environment content* \end{dispExample}

Creates a colored box based on a `tcolorbox`<sup>P. 12</sup>. It displays the environment content as source code in the upper part and as compiled text in the lower part of the box. The appearance is controlled by `/tcb/documentation listing style`<sup>P. 520</sup> and the style `/tcb/docexample`<sup>P. 520</sup>. It may be changed by redefining this style.

```
\begin{dispExample}  
This is a \LaTeX\ example.  
\end{dispExample}
```

```
This is a \LaTeX\ example.
```

```
This is a LATEX example.
```

U 2014-10-10

## \begin{dispExample\*}{<options>}   *environment content* \end{dispExample\*}

The starred version of `dispExample` takes `tcolorbox`<sup>P. 12</sup> *<options>* as parameter. These *<options>* are executed after `/tcb/docexample`<sup>P. 520</sup>.

```
\begin{dispExample*}{sidebyside}  
This is a \LaTeX\ example.  
\end{dispExample*}
```

```
This is a \LaTeX\ example.
```

```
This is a LATEX example.
```

```
\begin{dispListing}
  <environment content>
\end{dispListing}
```

Creates a colored box based on a `tcolorbox`<sup>→ P. 12</sup>. It displays the environment content as source code. The appearance is controlled by `/tcb/documentation listing style`<sup>→ P. 520</sup> and the style `/tcb/doceexample`<sup>→ P. 520</sup>. It may be changed by redefining this style.

```
\begin{dispListing}
This is a \LaTeX\ example.
\end{dispListing}
```

This is a `\LaTeX\ example.`

```
\begin{dispListing*}{<options>}
  <environment content>
\end{dispListing*}
```

The starred version of `dispListing` takes `tcolorbox`<sup>→ P. 12</sup> `<options>` as parameter. These `<options>` are executed after `/tcb/doceexample`<sup>→ P. 520</sup>.

```
\begin{dispListing*}{title=My listing}
This is a \LaTeX\ example.
\end{dispListing*}
```

My listing

This is a `\LaTeX\ example.`

```
\begin{absquote}
  <environment content>
\end{absquote}
```

Used to typeset an abstract as quoted and small text.

```
\begin{absquote}
|tcolorbox| provides an environment for colored and framed text boxes with a
heading line. Optionally, such a box can be split in an upper and a lower part.
\end{absquote}
```

`tcolorbox` provides an environment for colored and framed text boxes with a heading line. Optionally, such a box can be split in an upper and a lower part.

U 2023-12-01

## \tcbmakedocSubKey [*options*] {\i{name}}{\i{key path}}

Creates a new environment *name* based on *docKey*<sup>→ P. 501</sup> for the documentation of keys with the given *key path* as root. The new environment *name* takes the same parameters as *docKey*<sup>→ P. 501</sup> itself. The given *options* are prepended to options of the *name* environment. A second starred environment *name* is also created, which is identical to *name* but without index entry.

```
\tcbmakedocSubKey{docFooKey}{foo}

\begin{docFooKey}{foodummy}{=\meta{nothing}}{no default, initially empty}
Some key.
\end{docFooKey}

\begin{docFooKey*}{foo another dummy}{=\meta{nothing}}{no default, initially empty}
Some key (not indexed).
\end{docFooKey*}

/foodummy=<nothing>                                (no default, initially empty)
Some key.

/foo/foodummy=<nothing>                            (no default, initially empty)
Some key (not indexed).
```

N 2020-04-22  
U 2023-12-01

## \tcbmakedocSubKeys [*options*] {\i{name}}{\i{key path}}

Creates a new environment *name* based on *docKeys*<sup>→ P. 501</sup> for the documentation of keys with the given *key path* as root. The new environment *name* takes the same parameters as *docKeys*<sup>→ P. 501</sup> itself. The given *options* are prepended to options of the *name* environment (see */tcb/index key formatter*<sup>→ P. 512</sup> for an example).

```
\tcbmakedocSubKeys{docFooKeys}{foo}

\begin{docFooKeys}[
  doc parameter = {=\meta{nothing}},
  doc description = {no default, initially empty},
]
{
  {
    doc name = foodummy 2,
  },
  {
    doc name = foo another dummy 2,
    doc no index,
  }
}
Some description.
\end{docFooKeys}

/foodummy 2=<nothing>                                (no default, initially empty)
/foo/another dummy 2=<nothing>                      (no default, initially empty)
Some description.
```

### \refCom{<name>}

References a documented L<sup>A</sup>T<sub>E</sub>X macro with given <name> where <name> is written without backslash. The page reference is suppressed if it links to the same page.

We have created \refCom{foomakedocSubKey} as an example.

We have created \foomakedocSubKey<sup>→ P. 498</sup> as an example.

### \refCom\*{<name>}

References a documented L<sup>A</sup>T<sub>E</sub>X macro with given <name> where <name> is written without backslash. There is no page reference.

We have created \refCom\*{foomakedocSubKey} as an example.

We have created \foomakedocSubKey as an example.

### \refEnv{<name>}

References a documented L<sup>A</sup>T<sub>E</sub>X environment with given <name>. The page reference is suppressed if it links to the same page.

We have created \refEnv{foocolorbox} as an example.

We have created \foocolorbox<sup>→ P. 499</sup> as an example.

### \refEnv\*{<name>}

References a documented L<sup>A</sup>T<sub>E</sub>X environment with given <name>. There is no page reference.

We have created \refEnv\*{foocolorbox} as an example.

We have created \foocolorbox as an example.

### \refKey{<name>}

References a documented key with given <name> where <name> is the full path name of the key. The page reference is suppressed if it links to the same page.

We have created \refKey{/foo/footitle} as an example.

We have created /foo/footitle<sup>→ P. 501</sup> as an example.

### \refKey\*{<name>}

References a documented key with given <name> where <name> is the full path name of the key. There is no page reference.

We have created \refKey\*{/foo/footitle} as an example.

We have created /foo/footitle as an example.

N 2019-09-17

### \refPathOperation{\<name>}

References a documented TikZ path operation with given *<name>*. The page reference is suppressed if it links to the same page.

We have created \refPathOperation{fooop} as an example.

We have created fooop<sup>→ P. 502</sup> as an example.

N 2019-09-17

### \refPathOperation\*{\<name>}

References a documented TikZ path operation with given *<name>*. There is no page reference.

We have created \refPathOperation\*{fooop} as an example.

We have created fooop as an example.

U 2020-02-11

### \refAux{\<name>}

References some auxiliary environment, key, value, or color. The *<name>* is colored according to /tcb/color hyperlink<sup>→ P. 523</sup>, if hyperref colorlinks are set, but there is no real link.

Some pages back, one can see \refAux{/foo/footitle} as an example.

Some pages back, one can see /foo/footitle as an example.

U 2020-02-11

### \refAuxcs{\<name>}

References some auxiliary macro *<name>* where *<name>* is written without backslash. The *<name>* is colored according to /tcb/color hyperlink<sup>→ P. 523</sup>, if hyperref colorlinks are set, but there is no real link.

Some pages back, one can see \refAuxcs{fooaux} as an example.

Some pages back, one can see \fooaux as an example.

N 2024-09-18

U 2024-11-29

### \refPkg[{\<ctanname>}]{\<name>}

References a package *<name>* on CTAN with hyperlink <https://ctan.org/pkg/\<name>>. Using the option *<ctanname>* creates the hyperlink <https://ctan.org/pkg/\<ctanname>>. The appearance of the CTAN text can be customized by /tcb/ctan formatter<sup>→ P. 521</sup>.

\tcbset{ctan formatter=\texttt{}}

Hyperlinks are created with help of the \refPkg{hyperref} package.\par

The package \refPkg[frankenstein]{dialogue} is part of the  
\refPkg{frankenstein} bundle of packages.

Hyperlinks are created with help of the hyperref<sup>→ CTAN</sup> package.

The package dialogue<sup>→ CTAN</sup> is part of the frankenstein<sup>→ CTAN</sup> bundle of packages.

### \colDef{\text{}}

Sets `\text` with the command color, see `/tcb/color` command<sup>→ P. 523</sup>.

This is my `\colDef{\text{}}`.

This is my `text`.

### \colOpt{\text{}}

Sets `\text` with the option color, see `/tcb/color` option<sup>→ P. 523</sup>.

This is my `\colOpt{\text{}}`.

This is my `text`.

N 2019-09-18

### \colFade{\text{}}

Sets `\text` with the fade color, see `/tcb/color` fade<sup>→ P. 523</sup>.

This is my `\colFade{\text{}}`.

This is my `text`.

N 2014-09-19

### \tcbdocmarginnote[options]{text}

Creates a `tcolorbox` note with the given `\text` inside the margin using the `marginnote`<sup>→ CTAN</sup> package. The style of the `tcolorbox` is predefined and can be altered by `/tcb/doc` `marginnote`<sup>→ P. 514</sup> and the given `options`.

Some text `\tcbdocmarginnote{Note A}`  
which is commented by a note inside the margin.  
Alternatively to `\tcbdocmarginnote`, you can always use  
`\marginnote` with a `tcolorbox` directly. `\par`  
This is further text%  
`\tcbdocmarginnote[colframe=blue!50!white,colback=blue!5!white]{Note B}`  
with another note.

Note A

Note B

Some text which is commented by a note inside the margin. Alternatively to `\tcbdocmarginnote`, you can always use `\marginnote` with a `tcolorbox` directly.

This is further text with another note.

N 2014-09-19

### \tcbdocnew{\date{}}

Auxiliary macro which typesets the `/tcb/doclang/new`<sup>→ P. 524</sup> text with the given `\date`. It may be redefined for customization.

New:  
1978-02-09

`\tcbdocnew{1981-10-29}.`  
*% Next one is displayed in the margin:*  
`\tcbdocmarginnote{\tcbdocnew{1978-02-09}}`

New: 1981-10-29.

N 2014-09-19

### \tcbdocupdated{\date{}}

Auxiliary macro which typesets the `/tcb/doclang/updated`<sup>→ P. 524</sup> text with the given `\date`. It may be redefined for customization.

`\tcbdocupdated{2014-09-19}.`

Updated: 2014-09-19.

## 26.2 Entry Content Option Keys

N 2020-04-22

**/tcb/doc name=⟨name⟩** (no default, initially empty)

Sets the ⟨name⟩ of the entry to document, i.e. the ⟨name⟩ of the command, environment, key, etc. For `docCommand`<sup>→ P. 497</sup>, `docEnvironment`<sup>→ P. 499</sup>, etc. the ⟨name⟩ is set by a mandatory parameter, but can also be set by `/tcb/doc name`. `/tcb/doc name` also sets ⟨name⟩ to `/tcb/doc label`<sup>→ P. 513</sup>, `/tcb/doc index`<sup>→ P. 513</sup>, and `/tcb/doc sort index`<sup>→ P. 513</sup>.

```
\begin{docCommands}[
    doc no index, % no index entries for this example
    doc name      = bfseries,
] {}
Font setting to bold face.
\end{docCommands}
```

**\bfseries**

Font setting to bold face.

N 2020-04-22

**/tcb/doc parameter=⟨parameters⟩** (no default, initially empty)

Sets the ⟨parameters⟩ of the entry to document, i.e. the ⟨parameters⟩ of the command, environment, key, etc. For `docCommand`<sup>→ P. 497</sup>, `docEnvironment`<sup>→ P. 499</sup>, etc. the ⟨parameters⟩ is set by a mandatory option, but can also be set by `/tcb/doc parameter`.

```
\begin{docCommands}[
    doc no index, % no index entries for this example
    doc name      = textbf,
    doc parameter = \marg{text},
] {}
Sets \meta{text} in bold face.
\end{docCommands}
```

**\textbf{⟨text⟩}**

Sets ⟨text⟩ in bold face.

N 2020-04-22

**/tcb/doc keypath=⟨key path⟩** (no default, initially empty)

Sets the ⟨key path⟩ of the key to document. For `docKey`<sup>→ P. 501</sup> and `docKey*`<sup>→ P. 501</sup> the ⟨key path⟩ is set by a specialized option, but can also be set by `/tcb/doc keypath`.

```
\begin{docKeys}[
    doc no index, % no index entries for this example
    doc keypath   = tikz,
    doc name     = fill,
    doc parameter = \colOpt{=\meta{color}},
    doc description = default is scope's color setting,
] {}
This option causes the path to be filled.
\end{docKeys}
```

**/tikz/fill=⟨color⟩**

(default is scope's color setting)

This option causes the path to be filled.

N 2023-12-01

**/tcb/doc key prefix=<key prefix>** (no default, initially /)

Sets the *<key prefix>* (root path) of the key to document. This prefix is prepended to */tcb/doc keypath<sup>P.511</sup>*, if */tcb/doc keypath<sup>P.511</sup>* is not empty. The default / setting is intended for pgfkeys. For 13keys, setting */tcb/doc key prefix* to be empty is more appropriate, since their path starts with a module name without /.

```
\begin{docKeys}[  
    doc no index, % no index entries for this example  
    doc key prefix = ,  
    doc keypath = tcbbox,% module name  
    doc name = my_13_key,  
    doc parameter = {\meta{some value}},  
    doc description = example,  
] {}  
Documentation of a key using |13keys|.  
\end{docKeys}
```

**tcbbox/my\_13\_key=<some value>** (example)

Documentation of a key using 13keys.

N 2023-12-01

**/tcb/index key formatter=<macro>** (no default, initially empty)

N 2023-12-01

**/tcb/index keys formatter=<macro>** (no default, initially empty)

Sets *<macro>* as formatter for the text given by */tcb/doclang/key<sup>P.524</sup>* or */tcb/doclang/keys<sup>P.524</sup>* inside the index. The *<macro>* has to take one mandatory argument (the language text). The intended purpose is to differentiate between different sorts of keys, if necessary, e.g. between pgfkeys and 13keys. If these options are used without value, the formatters are reset to their standard behavior.

```
% See index of this documentation to recognize the effect  
\newcommand{\myFormatPgfkeysIndex}[1]{\#1 (\textsf{pgfkeys})}  
\newcommand{\myFormatExplkeysIndex}[1]{\#1 (\textsf{13keys})}  
  
\tcbmakedocSubKey[  
    index key formatter=\myFormatPgfkeysIndex,  
    index keys formatter=\myFormatExplkeysIndex  
]{docFooPgfkey}{foopgf}  
\tcbmakedocSubKey[  
    doc key prefix=,  
    index key formatter=\myFormatExplkeysIndex,  
    index keys formatter=\myFormatExplkeysIndex  
]{docFooExplkey}{fooexpl}  
  
\begin{docFooPgfkey}{foo pgf}{}{no default, initially empty}  
    content  
\end{docFooPgfkey}  
  
\begin{docFooExplkey}{foo expl}{}{no default, initially empty}  
    content  
\end{docFooExplkey}
```

**/foopgf/foo pgf=<name>** (no default, initially empty)  
content

**fooexpl/foo expl=<name>** (no default, initially empty)  
content

**/tcb/doc description=***<description>* (no default, initially empty)

Sets a (short!) additional *<description>* for `docCommand`<sup>P. 497</sup>, `docEnvironment`<sup>P. 499</sup>, or `docPathOperation`<sup>P. 502</sup>. Such a description is mandatory for `docKey`<sup>P. 501</sup>.

```
\begin{docCommand*}[doc description=my description]{myCommandF}{\marg{argument}}
  This is the documentation of \refCom{myCommandF} which takes one \meta{argument}.
  \refCom{myCommandF} does some funny things with its \meta{argument}.
\end{docCommand*}
```

**\myCommandF{<argument>}** (my description)

This is the documentation of `\myCommandF` which takes one *<argument>*. `\myCommandF` does some funny things with its *<argument>*.

! Note that the description *<text>* may overlap with the text on the left hand side if too long. Linebreaks can be used inside the *<text>*.

N 2019-09-18

**/tcb/doc label=***<text>* (no default, initially unset)

If used inside the option list of `docCommand`<sup>P. 497</sup>, `docEnvironment`<sup>P. 499</sup>, `docKey`<sup>P. 501</sup>, etc, then *<text>* is used for labeling instead of the name of the definition.

```
\begin{docPathOperation*}[doc label=pathline]{-\{}{\}\meta{coordinate or cycle}}
  This is the documentation of \refPathOperation{pathline}.
\end{docPathOperation*}
```

**\path ... --<coordinate or cycle> ...;**

This is the documentation of --.

N 2020-01-07

**/tcb/doc index=***<text>* (no default, initially unset)

If used inside the option list of `docCommand`<sup>P. 497</sup>, `docEnvironment`<sup>P. 499</sup>, `docKey`<sup>P. 501</sup>, etc, then *<text>* is used for the index instead of the name of the definition.

```
\begin{docPathOperation}[doc index=foo path (horizontal then vertical),
  doc label=pathline2]{-\textbar}{\meta{coordinate or cycle}}
  This is the documentation of \refPathOperation{pathline2}.
\end{docPathOperation}
```

**\path ... -|<coordinate or cycle> ...;**

This is the documentation of -|.

N 2020-04-23

**/tcb/doc sort index=***<text>* (no default, initially unset)

If used inside the option list of `docCommand`<sup>P. 497</sup>, `docEnvironment`<sup>P. 499</sup>, `docKey`<sup>P. 501</sup>, etc, then *<text>* is used as sort key for the index instead of the name of the definition.

```
\begin{docCommands}[
  doc name      = l_tcobox_example_t1,
  doc sort index = example_t1, % sorted under e like example
]
\end{docCommands}
```

`/tcb/doc into index=true|false` (default `true`, initially `true`)

If set to `false`, no index entries are written for the main documentation environments. The same effect is achieved by using e.g. `docCommand*`<sup>→ P. 498</sup> instead of `docCommand`<sup>→ P. 497</sup>.

N 2020-04-22 `/tcb/doc no index` (style, initially unset)

If set, no index entries are written for the main documentation environments. This is a shortcut for using `/tcb/doc into index=false`.

N 2014-09-19 `/tcb/doc marginnote=<options>` (no default, initially empty)

Sets style `<options>` for the displayed box of the `\tcbdocmarginnote`<sup>→ P. 510</sup> command.

```
\tcbset{doc marginnote={colframe=blue!50!white,colback=blue!5!white}}%
This is some text\tcbdocmarginnote{Note A}
which is commented by a note inside the margin.
```

Note A

This is some text which is commented by a note inside the margin.

N 2014-09-19 `/tcb/doc new=<date>` (style, no default)

Adds a marginnote with a “New: `<date>`” message at the beginning of the upper box part. The intended use is inside the option list of `docCommand`<sup>→ P. 497</sup>, `docEnvironment`<sup>→ P. 499</sup>, etc.

```
\begin{docCommand}[doc new=2000-01-01]{foosomething}{\marg{text}}
Some command for something.
\end{docCommand}
```

New:

2000-01-01

Some command for something.

N 2014-09-19 `/tcb/doc updated=<date>` (style, no default)

Adds a marginnote with a “Updated: `<date>`” message at the beginning of the upper box part. See `/tcb/doc new`.

N 2014-09-19 `/tcb/doc new and updated=<new date>{<update date>}` (style, no default)

Adds a marginnote with “New: `<new date>`” and “Updated: `<update date>`” messages at the beginning of the upper box part. See `/tcb/doc new`.

## 26.3 Entry Customization Option Keys

`/tcb/doc left=<length>` (no default, initially 2em)

Sets the left hand offset of the documentation texts from `docCommand`<sup>P. 497</sup>, `docEnvironment`<sup>P. 499</sup>, `docKey`<sup>P. 501</sup>, etc, to `<length>`.

```
\begin{docCommand*}[doc left=2cm,doc left indent=-2cm]{myCommandA}{\marg{argument}}
This is the documentation of \refCom{myCommandA} which takes one \meta{argument}.
\refCom{myCommandA} does some funny things with its \meta{argument}.
\end{docCommand*}
```

`\myCommandA{<argument>}`

This is the documentation of `\myCommandA` which takes one `<argument>`. `\myCommandA` does some funny things with its `<argument>`.

`/tcb/doc right=<length>` (no default, initially 0em)

Sets the right hand offset of the documentation texts from `docCommand`<sup>P. 497</sup>, `docEnvironment`<sup>P. 499</sup>, `docKey`<sup>P. 501</sup>, etc, to `<length>`.

```
\begin{docCommand*}[doc right=2cm]{myCommandB}{\marg{argument}}
This is the documentation of \refCom{myCommandB} which takes one \meta{argument}.
\refCom{myCommandB} does some funny things with its \meta{argument}.
\end{docCommand*}
```

`\myCommandB{<argument>}`

This is the documentation of `\myCommandB` which takes one `<argument>`. `\myCommandB` does some funny things with its `<argument>`.

`/tcb/doc left indent=<length>` (no default, initially -2em)

Sets the left hand indent of documentation heads from `docCommand`<sup>P. 497</sup>, `docEnvironment`<sup>P. 499</sup>, `docKey`<sup>P. 501</sup>, etc, to `<length>`.

```
\begin{docCommand*}[doc left indent=2cm]{myCommandC}{\marg{argument}}
This is the documentation of \refCom{myCommandC} which takes one \meta{argument}.
\refCom{myCommandC} does some funny things with its \meta{argument}.
\end{docCommand*}
```

`\myCommandC{<argument>}`

This is the documentation of `\myCommandC` which takes one `<argument>`. `\myCommandC` does some funny things with its `<argument>`.

`/tcb/doc right indent=<length>` (no default, initially 0pt)

Sets the right hand indent of documentation heads from `docCommand`<sup>P. 497</sup>, `docEnvironment`<sup>P. 499</sup>, `docKey`<sup>P. 501</sup>, etc, to `<length>`.

```
\begin{docCommand*}[doc right indent=-10mm,doc right=10mm,
doc description=test value]{myCommandD}{\marg{argument}}
This is the documentation of \refCom{myCommandD} which takes one \meta{argument}.
\refCom{myCommandD} does some funny things with its \meta{argument}.
\end{docCommand*}
```

`\myCommandD{<argument>}`

(test value)

This is the documentation of `\myCommandD` which takes one `<argument>`. `\myCommandD` does some funny things with its `<argument>`.

The head lines of the main documentation environments `docCommand`<sup>→ P. 497</sup>, `docEnvironment`<sup>→ P. 499</sup>, `docKey`<sup>→ P. 501</sup>, etc, are `tcolorboxes` inside a `tcbraster`<sup>→ P. 313</sup>. Options to the surrounding `tcbrasters` and the embedded `tcolorboxes` can be given using the following keys.

N 2020-04-24

`/tcb/doc raster command=<options>` (no default, initially empty)

Sets `<options>` for the surrounding `tcbraster`<sup>→ P. 313</sup> of `docCommand`<sup>→ P. 497</sup>, `docCommand*`<sup>→ P. 498</sup>, and `docCommands`<sup>→ P. 498</sup>.

```
\tcbset{doc raster command={raster before skip=7mm,raster after skip=0mm}}
```

The is an example text.

```
\begin{docCommand*}{myCommandI}{\marg{argument}}
```

This is the documentation of `\refCom{myCommandI}` which takes one `\meta{argument}`.

`\refCom{myCommandI}` does some funny things with its `\meta{argument}`.

```
\end{docCommand*}
```

The is an example text.

```
\myCommandI{<argument>}
```

This is the documentation of `\myCommandI` which takes one `<argument>`. `\myCommandI` does some funny things with its `<argument>`.

N 2020-04-24

`/tcb/doc raster environment=<options>` (no default, initially empty)

Sets `<options>` for the surrounding `tcbraster`<sup>→ P. 313</sup> of `docEnvironment`<sup>→ P. 499</sup>, `docEnvironment*`<sup>→ P. 499</sup>, and `docEnvironments`<sup>→ P. 500</sup>.

N 2020-04-24

`/tcb/doc raster key=<options>` (no default, initially empty)

Sets `<options>` for the surrounding `tcbraster`<sup>→ P. 313</sup> of `docKey`<sup>→ P. 501</sup>, `docKey*`<sup>→ P. 501</sup>, and `docKeys`<sup>→ P. 501</sup>.

N 2020-04-24

`/tcb/doc raster path=<options>` (no default, initially empty)

Sets `<options>` for the surrounding `tcbraster`<sup>→ P. 313</sup> of `docPathOperation`<sup>→ P. 502</sup>, `docPathOperation*`<sup>→ P. 502</sup>, and `docPathOperations`<sup>→ P. 502</sup>.

N 2020-04-24

`/tcb/doc raster=<options>` (no default, initially empty)

Shortcut for setting the same `<options>` for `/tcb/doc raster command`, `/tcb/doc raster environment`, `/tcb/doc raster key`, and `/tcb/doc raster path`.

`/tcb/doc head command=<options>` (no default, initially empty)

Sets `<options>` for the head line of `docCommand`<sup>→ P. 497</sup>, `docCommand*`<sup>→ P. 498</sup>, and `docCommands`<sup>→ P. 498</sup>.

```
\tcbset{doc head command={interior style={fill,left color=red!20!white,right color=blue!20!white}}}
```

```
\begin{docCommand*}{myCommandE}{\marg{argument}}
```

This is the documentation of `\refCom{myCommandE}` which takes one `\meta{argument}`.

`\refCom{myCommandE}` does some funny things with its `\meta{argument}`.

```
\end{docCommand*}
```

```
\myCommandE{<argument>}
```

This is the documentation of `\myCommandE` which takes one `<argument>`. `\myCommandE` does some funny things with its `<argument>`.

**/tcb/doc head environment**=*<options>* (no default, initially empty)

Sets *<options>* for the head line of `docEnvironment`<sup>→ P. 499</sup>, `docEnvironment*`<sup>→ P. 499</sup>, and `docEnvironments`<sup>→ P. 500</sup>.

```
\tcbset{doc head environment={beamer,boxsep=2pt,arc=2pt,colback=green!20!white}}
```

```
\begin{docEnvironment*}{myEnvironment}{\margin{argument}}
  This is the documentation of \refEnv{myEnvironment} which
  takes one \meta{argument}.
\end{docEnvironment*}
```

```
\begin{myEnvironment}{<argument>}
  <environment content>
\end{myEnvironment}
```

This is the documentation of `myEnvironment` which takes one *<argument>*.

**/tcb/doc head key**=*<options>* (no default, initially empty)

Sets *<options>* for the head line of `docKey`<sup>→ P. 501</sup>, `docKey*`<sup>→ P. 501</sup>, and `docKeys`<sup>→ P. 501</sup>.

```
\tcbset{doc head key={boxsep=4pt,arc=4pt,boxrule=0.6pt,
  frame style=fill,interior style=fill,colframe=green!50!black}}

\begin{docKey}[foo]{myKey}{}{no value}
  This is the documentation of \refKey{/foo/myKey}.
\end{docKey}
```

```
/foo/myKey (no value)
```

This is the documentation of `/foo/myKey`.

**N 2019-09-18 /tcb/doc head path**=*<options>* (no default, initially empty)

Sets *<options>* for the head line of `docPathOperation`<sup>→ P. 502</sup>, `docPathOperation*`<sup>→ P. 502</sup>, and `docPathOperations`<sup>→ P. 502</sup>.

```
\tcbset{doc head command={interior style={fill,left color=red!7!white,
  right color=blue!7!white}}}

\begin{docPathOperation*}{-{}-}{\meta{coordinate or cycle}}
  This is the documentation of \refPathOperation{-{}-}.
\end{docPathOperation*}
```

```
\path ... --<coordinate or cycle> ...;
```

This is the documentation of `--`.

**U 2019-09-18 /tcb/doc head**=*<options>* (no default, initially empty)

Shortcut for setting the same *<options>* for `/tcb/doc head command`<sup>→ P. 516</sup>, `/tcb/doc head environment`, `/tcb/doc head key`, and `/tcb/doc head path`.

The description texts of the main documentation environments `docCommand`<sup>→ P. 497</sup>, `docEnvironment`<sup>→ P. 499</sup>, `docKey`<sup>→ P. 501</sup>, etc, are set in a compact form without indentation and `parskip=0pt`. This settings can overruled by using the following keys to insert code before (or after) the description texts.

N 2015-10-09

**/tcb/before doc body command=**<code> (no default, initially empty)

Executes <code> before the description texts of `docCommand`<sup>→ P. 497</sup> and `docCommand*`<sup>→ P. 498</sup>.

```
\tcbset{before doc body command={%
  \setlength{\parindent}{2.5em}%
  \setlength{\parskip}{1ex plus 0.75ex minus 0.25ex}%
}%

\begin{docCommand*}{myCommandG}{\marg{argument}}
  This is the documentation of \refCom{myCommandG} which takes one \meta{argument}.
  \refCom{myCommandG} does some funny things with its \meta{argument}.
\end{docCommand*}

\myCommandG{<argument>}
```

This is the documentation of `\myCommandG` which takes one <argument>. `\myCommandG` does some funny things with its <argument>.

N 2015-10-09

**/tcb/after doc body command=**<code> (no default, initially empty)

Executes <code> after the description texts of `docCommand`<sup>→ P. 497</sup> and `docCommand*`<sup>→ P. 498</sup>.

```
\tcbset{after doc body command={%
  \hfill\nolinebreak[1]\hspace*{\fill}\textcolor{red}{$\diamondsuit$}%
}%

\begin{docCommand*}{myCommandH}{\marg{argument}}
  This is the documentation of \refCom{myCommandH} which takes one \meta{argument}.
  \refCom{myCommandH} does some funny things with its \meta{argument}.
\end{docCommand*}

\myCommandH{<argument>}
```

This is the documentation of `\myCommandH` which takes one <argument>. `\myCommandH` does some funny things with its <argument>. ◇

N 2015-10-09

**/tcb/before doc body environment=**<code> (no default, initially empty)

Executes <code> before the description texts of `docEnvironment`<sup>→ P. 499</sup> and `docEnvironment*`<sup>→ P. 499</sup>.

N 2015-10-09

**/tcb/after doc body environment=**<code> (no default, initially empty)

Executes <code> after the description texts of `docEnvironment`<sup>→ P. 499</sup> and `docEnvironment*`<sup>→ P. 499</sup>.

N 2015-10-09

**/tcb/before doc body key=**<code> (no default, initially empty)

Executes <code> before the description texts of `docKey`<sup>→ P. 501</sup> and `docKey*`<sup>→ P. 501</sup>.

N 2015-10-09

**/tcb/after doc body key=**<code> (no default, initially empty)

Executes <code> after the description texts of `docKey`<sup>→ P. 501</sup> and `docKey*`<sup>→ P. 501</sup>.

<b>N</b> 2019-09-18	<b>/tcb/before doc body path=</b> <i>&lt;code&gt;</i>	(no default, initially empty)
	Executes <i>&lt;code&gt;</i> before the description texts of <b>docPathOperation</b> <sup>→ P. 502</sup> and <b>docPathOperation*</b> <sup>→ P. 502</sup> .	
<b>N</b> 2019-09-18	<b>/tcb/after doc body path=</b> <i>&lt;code&gt;</i>	(no default, initially empty)
	Executes <i>&lt;code&gt;</i> after the description texts of <b>docPathOperation</b> <sup>→ P. 502</sup> and <b>docPathOperation*</b> <sup>→ P. 502</sup> .	
<b>N</b> 2015-10-09 <b>U</b> 2019-09-18	<b>/tcb/before doc body=</b> <i>&lt;options&gt;</i>	(no default, initially empty)
	Shortcut for setting the same <i>&lt;options&gt;</i> for <b>/tcb/before doc body command</b> <sup>→ P. 518</sup> , <b>/tcb/before doc body environment</b> <sup>→ P. 518</sup> , <b>/tcb/before doc body key</b> <sup>→ P. 518</sup> , and <b>/tcb/before doc body path</b> .	
<b>N</b> 2015-10-09 <b>U</b> 2019-09-18	<b>/tcb/after doc body=</b> <i>&lt;options&gt;</i>	(no default, initially empty)
	Shortcut for setting the same <i>&lt;options&gt;</i> for <b>/tcb/after doc body command</b> <sup>→ P. 518</sup> , <b>/tcb/after doc body environment</b> <sup>→ P. 518</sup> , <b>/tcb/after doc body key</b> <sup>→ P. 518</sup> , and <b>/tcb/after doc body path</b> .	

## 26.4 General Customization Option Keys

U 2015-03-16

**/tcb/docexample** (style, no value)

Sets the style for `dispExample`<sup>→ P. 505</sup> and `dispListing`<sup>→ P. 506</sup> with the colors `ExampleBack` and `ExampleFrame`. To change the appearance of the examples, this style can be redefined.

```
% Predefined style:  
\tcbset{  
    docexample/.style={colframe=ExampleFrame,colback=ExampleBack,  
        before skip=\medskipamount,after skip=\medskipamount,  
        fontlower=\footnotesize}  
}
```

**/tcb/documentation listing options**=⟨key list⟩ (no default, initially `style=tcbdocumentation`)

Sets the options from the package `listings`<sup>→ CTAN</sup> [6]. They are used inside `dispExample`<sup>→ P. 505</sup> and `dispListing`<sup>→ P. 506</sup> to typeset the listings. Note that this is not identical to the key `/tcb/listing options`<sup>→ P. 343</sup> which is used for “normal” listings. Used for `/tcb/listing engine`<sup>→ P. 348</sup>=`listings` only.

**/tcb/documentation listing style**=⟨listing style⟩ (no default, initially `tcbdocumentation`)

Abbreviation for `documentation listing options={style=...}`. This key sets a ⟨style⟩ for the `listings`<sup>→ CTAN</sup> package, see [6]. Note that this is not identical to the key `/tcb/listing style`<sup>→ P. 343</sup> which is used for “normal” listings.

Used for `/tcb/listing engine`<sup>→ P. 348</sup>=`listings` only.

**/tcb/documentation minted options**=⟨key list⟩ (no default, initially `tabsize=2,fontsize=\small`)

Sets the options from the package `minted`<sup>→ CTAN</sup> [13] which are used during typesetting of the listing, if used. Note that this is not identical to the key `/tcb/minted options`<sup>→ P. 346</sup> which is used for “normal” listings.

Used for `/tcb/listing engine`<sup>→ P. 348</sup>=`minted` only.

**/tcb/documentation minted style**=⟨key list⟩ (no default, initially unset)

Sets a ⟨style⟩ known to Pygments [15] for the package `minted`<sup>→ CTAN</sup> [13], if used. Note that this is not identical to the key `/tcb/minted style`<sup>→ P. 347</sup> which is used for “normal” listings.

Used for `/tcb/listing engine`<sup>→ P. 348</sup>=`minted` only.

N 2017-04-24 **/tcb/documentation minted language**=⟨programming language⟩ (no default, initially `latex`)

Sets a ⟨programming language⟩ known to Pygments [15] for the package `minted`<sup>→ CTAN</sup> [13], if used. Note that this is not identical to the key `/tcb/minted language`<sup>→ P. 346</sup> which is used for “normal” listings.

Used for `/tcb/listing engine`<sup>→ P. 348</sup>=`minted` only.

N 2017-04-25

**/tcb/keywords bold=true|false** (default true, initially true)

Keyword used in `docEnvironment`<sup>→ P. 499</sup>, `docCommand`<sup>→ P. 497</sup>, etc. are printed boldface (or not). Since the typewriter font is used, the effect may be invisible with Computer Modern fonts or similar which do not have a bold variant. Note that references to keywords are not printed boldface at all.

```
\LARGE  
\docAuxCommand{fooaux}, \refCom{tcbset}  
  
\tcbset{keywords bold=false}  
\docAuxCommand{fooaux}, \refCom{tcbset}
```

**\fooaux, \tcbset**<sup>→ P. 13</sup>  
**\fooaux, \tcbset**<sup>→ P. 13</sup>

N 2024-03-13

**/tcb/page ref formatter=<macro>** (no default, initially `\textsuperscript`)

Sets `<macro>` as formatter for page references like the reference to `tcolorbox`<sup>→ P. 12</sup>. The default setting puts the page reference in a `\textsuperscript`. It may be changed to `\fakesuperscript` to cope with superiors problems in combination with the `realscripts`<sup>→ CTAN</sup> package or just otherwise for user customization.

N 2024-11-29

**/tcb/ctan formatter=<macro>** (no default, initially empty)

Sets `<macro>` as formatter for the string CTAN inside `\refPkg`<sup>→ P. 509</sup>. The `<macro>` has to take one mandatory argument (the string CTAN) and is typically some font setting.

```
\tcbset{ctan formatter=\textsf}  
Images are included using the \refPkg{graphicx} package.\par  
\newcommand{\myformatter}[1]{\textbf{\ttfamily\color{red}\TeX-Archive}}  
\tcbset{ctan formatter=\myformatter}  
Draw your own picture with help of the \refPkg{tikz} package.
```

Images are included using the `graphicx`<sup>→ CTAN</sup> package.  
Draw your own picture with help of the `tikz`<sup>→ TeX-Archive</sup> package.

N 2015-01-09

**/tcb/index command=<macro>** (no default, initially `\index`)

Replaces the internally used `\index` macro by the given `<macro>`. The `<macro>` has to take one mandatory argument like `\index`. This option is mutually exclusive with `/tcb/index command name`.

```
\tcbset{index command=\myindexcommand}
```

N 2015-01-09

**/tcb/index command name=<name>** (no default, initially unset)

Replaces the internally used `\index` macro by `\index[<name>]`, i.e. `\index{...}` is replaced by `\index[<name>]{...}`. This option is intended to be used with `imakeidx` and is mutually exclusive with `/tcb/index command`.

```
\tcbset{index command name=mydoc}
```

`/tcb/index format=<format>` (no default, initially `pgf`)

Determines the basic `<format>` of the generated index. Feasible values are:

- `pgfsection`: The index is formatted like in the `pgf` documentation (as a section).
- `pgfchapter`: The index is formatted like in the `pgf` documentation (as a chapter).
- `pgf`: Alias for `pgfsection`.
- `doc`: The index is assumed to be formatted by `doc` or `ltxdoc`. The usage of `makeindex` with `-s gind.ist` is assumed. The package `hypdoc`<sup>→ CTAN</sup> has to be loaded before `tcolorbox`. Only a limited set of customizations will work! This option cannot be unset when used!
- `off`: The index is not formatted by `tcolorbox`. Use this, if the index is formatted by other package like `imakeidx`<sup>→ CTAN</sup>.

`/tcb/index actual=<character>` (no default, initially `@`)

Sets the character for “actual” in automatic indexing.

`/tcb/index quote=<character>` (no default, initially `"`)

Sets the character for “quote” in automatic indexing.

`/tcb/index level=<character>` (no default, initially `!`)

Sets the character for “level” in automatic indexing.

`/tcb/index default settings` (style, no value)

Sets the `makeindex` default values for `/tcb/index actual`, `/tcb/index quote`, and `/tcb/index level`.

`/tcb/index german settings` (style, no value)

Sets the `makeindex` values recommended for German language texts. This is identical to setting the following:

```
\tcbset{index actual={=},index quote={!},index level={>}}
```

`/tcb/index annotate=true|false` (default `true`, initially `true`)

If set to `true`, the index entries are annotated with short descriptions given by `/tcb/doclang/environment`<sup>→ P. 524</sup>, `/tcb/doclang/key`<sup>→ P. 524</sup>, and others.

`/tcb/index colorize=true|false` (default `true`, initially `false`)

If set to `true`, the index entries colorized according to the color settings given by `/tcb/color environment`<sup>→ P. 523</sup>, `/tcb/color key`<sup>→ P. 523</sup>, and others.

`N 2022-06-20 /tcb/index gather colors=true|false` (default `true`, initially `true`)

`N 2022-06-20 /tcb/index gather commands=true|false` (default `true`, initially `true`)

`N 2022-06-20 /tcb/index gather counters=true|false` (default `true`, initially `true`)

`N 2022-06-20 /tcb/index gather environments=true|false` (default `true`, initially `true`)

`N 2022-06-20 /tcb/index gather keys=true|false` (default `true`, initially `true`)

`N 2022-06-20 /tcb/index gather lengths=true|false` (default `true`, initially `true`)

`N 2022-06-20 /tcb/index gather paths=true|false` (default `true`, initially `true`)

`N 2022-06-20 /tcb/index gather values=true|false` (default `true`, initially `true`)

If set to `true`, an additional index grouping is created where entries are gathered, e.g. `/tcb/index gather counters` creates an index entry ‘Colors’, see `/tcb/doclang/colors`<sup>→ P. 524</sup>, which gets all colors as sub entries.

`N 2022-06-20 /tcb/index gather all` (style, initially set)

`N 2022-06-20 /tcb/index gather none` (style)

Switches all index gather options from above to `true` (all) or `false` (none).

`/tcb/color command=<color>` (no default, initially Definition)

Sets the highlight color used by macro definitions.

`/tcb/color environment=<color>` (no default, initially Definition)

Sets the highlight color used by environment definitions.

`/tcb/color key=<color>` (no default, initially Definition)

Sets the highlight color used by key definitions.

**N** 2019-09-18 `/tcb/color path=<color>` (no default, initially Definition)

Sets the highlight color used by TikZ path operation definitions.

`/tcb/color value=<color>` (no default, initially Definition)

Sets the highlight color used by value definitions.

**N** 2015-01-08 `/tcb/color counter=<color>` (no default, initially Definition)

Sets the highlight color used by counter definitions.

**N** 2015-01-08 `/tcb/color length=<color>` (no default, initially Definition)

Sets the highlight color used by length definitions.

`/tcb/color color=<color>` (no default, initially Definition)

Sets the highlight color used by color definitions.

**U** 2019-09-18 `/tcb/color definition=<color>` (no default, initially Definition)

Sets the highlight color for `/tcb/color command`, `/tcb/color environment`, `/tcb/color key`, `/tcb/color path`, `/tcb/color value`, `/tcb/color counter`, `/tcb/color length`, and `/tcb/color color`.

`/tcb/color option=<color>` (no default, initially Option)

Sets the color used for optional arguments.

`/tcb/color fade=<color>` (no default, initially Fade)

Sets the color used for faded text like `\path` in [docPathOperation](#)<sup>P.502</sup>.

`/tcb/color hyperlink=<color>` (no default, initially Hyperlink)

Sets the color for all hyper-links, i. e. all internal and external links.

## 26.5 Language Option Keys

The following keys are provided for language specific settings. The English language is predefined.

	<code>/tcb/english language</code>	(style, no value)
	Sets all language specific settings to English.	
	<code>/tcb/doclang/color=&lt;text&gt;</code>	(no default, initially <code>color</code> )
	Text used in the index for colors.	
	<code>/tcb/doclang/colors=&lt;text&gt;</code>	(no default, initially <code>Colors</code> )
	Heading text in the index for colors.	
N 2022-06-20	<code>/tcb/doclang/commands=&lt;text&gt;</code>	(no default, initially <code>Commands</code> )
	Heading text in the index for commands.	
N 2015-01-08	<code>/tcb/doclang/counter=&lt;text&gt;</code>	(no default, initially <code>counter</code> )
	Text used in the index for counters.	
N 2015-01-08	<code>/tcb/doclang/counters=&lt;text&gt;</code>	(no default, initially <code>Counters</code> )
	Heading text in the index for counters.	
	<code>/tcb/doclang/environment=&lt;text&gt;</code>	(no default, initially <code>environment</code> )
	Text used in the index for environments.	
	<code>/tcb/doclang/environments=&lt;text&gt;</code>	(no default, initially <code>Environments</code> )
	Heading text in the index for environments.	
	<code>/tcb/doclang/environment content=&lt;text&gt;</code>	(no default, initially <code>environment content</code> )
	Text used in <code>docEnvironment</code> <sup>→ P. 499</sup> .	
	<code>/tcb/doclang/index=&lt;text&gt;</code>	(no default, initially <code>Index</code> )
	Heading text for the index.	
	<code>/tcb/doclang/key=&lt;text&gt;</code>	(no default, initially <code>key</code> )
	Text used in the index for keys.	
	<code>/tcb/doclang/keys=&lt;text&gt;</code>	(no default, initially <code>Keys</code> )
	Heading text used in the index for keys.	
N 2015-01-08	<code>/tcb/doclang/length=&lt;text&gt;</code>	(no default, initially <code>length</code> )
	Text used in the index for lengths.	
N 2015-01-08	<code>/tcb/doclang/lengths=&lt;text&gt;</code>	(no default, initially <code>Lengths</code> )
	Heading text in the index for lengths.	
N 2014-09-19	<code>/tcb/doclang/new=&lt;text&gt;</code>	(no default, initially <code>New</code> )
	Announcement text for new content.	
N 2019-09-18	<code>/tcb/doclang/path=&lt;text&gt;</code>	(no default, initially <code>path operation</code> )
	Text used in the index for path operations.	
N 2019-09-18	<code>/tcb/doclang(paths=&lt;text&gt;)</code>	(no default, initially <code>Path operations</code> )
	Heading text in the index for path operations.	
	<code>/tcb/doclang/pageshort=&lt;text&gt;</code>	(no default, initially <code>P.</code> )
	Short text for page references.	
N 2014-09-19	<code>/tcb/doclang/updated=&lt;text&gt;</code>	(no default, initially <code>Updated</code> )
	Announcement text for updated content.	

`/tcb/doclang/value=<text>` (no default, initially `value`)

Text used in the index for values.

`/tcb/doclang/values=<text>` (no default, initially `Values`)

Heading text in the index for values.

## 26.6 Predefined Colors of the Library


The following colors are predefined. They are used as default colors in some library commands.

`Option`  , `Definition`  , `ExampleFrame`  , `ExampleBack`  , `Hyperlink`  , `Fade`  .

## A Picture Credits

The following pictures were used inside this documentation.

Basilica\_5.png

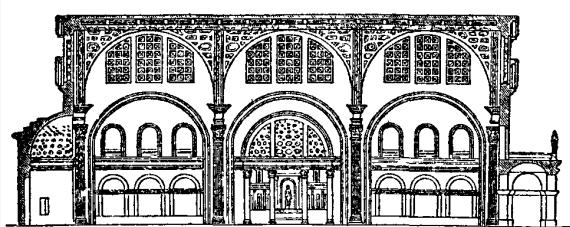

[http://commons.wikimedia.org/wiki/File:Basilica\\_5.png](http://commons.wikimedia.org/wiki/File:Basilica_5.png)

lichtspiel.jpg



Photograph taken by Thomas F. Sturm.

crinklepaper.png




Created with GIMP.  
<http://www.gimp.org>

pink\_marble.png




Created with GIMP.  
<http://www.gimp.org>

blueshade.png



Created with GIMP.  
<http://www.gimp.org>

goldshade.png



Created with GIMP.  
<http://www.gimp.org>

## References

- [1] Donald Arseneau. *The varwidth package*. Sept. 26, 2011.  
<https://mirrors.ctan.org/macros/latex/contrib/varwidth/varwidth-doc.pdf>.
- [2] Gustavo Barros. *The zref-clever package*. Nov. 28, 2024.  
<https://mirrors.ctan.org/macros/latex/contrib/zref-clever/zref-clever-doc.pdf>.
- [3] David Carlisle. *The tabularx package*. Dec. 11, 2023.  
<https://mirror.ctan.org/macros/latex/required/tools/tabularx.pdf>.
- [4] David Carlisle. *The file ltxdoc.dtx for use with L<sup>A</sup>T<sub>E</sub>X 2<sub>E</sub>*. Feb. 28, 2024.  
<https://mirror.ctan.org/macros/latex/base/ltxdoc.pdf>.
- [5] Toby Cubitt. *The cleveref Package*. Mar. 27, 2018.  
<https://mirror.ctan.org/macros/latex/contrib/cleveref/cleveref.pdf>.
- [6] Carsten Heinz, Brooks Moses, and Jobst Hoffmann. *The Listings Package*. Version 1.9. Sept. 23, 2024.  
<https://mirror.ctan.org/macros/latex/contrib/listings/listings.pdf>.
- [7] Philipp Lehman and Joseph Wright. *The etoolbox Package*. Feb. 11, 2025.  
<https://mirror.ctan.org/macros/latex/contrib/etoolbox/etoolbox.pdf>.
- [8] Frank Mittelbach. *The doc and shortvrb Packages*. Dec. 25, 2024.  
<https://mirror.ctan.org/macros/latex/base/doc.dtx>.
- [9] Frank Mittelbach. *An environment for multicolumn output*. May 31, 2025.  
<https://mirror.ctan.org/macros/latex/required/tools/multicol.pdf>.
- [10] Heiko Oberdiek. *The listingsutf8 package*. Dec. 10, 2019.  
<http://mirrors.ctan.org/macros/latex/contrib/listingsutf8/listingsutf8.pdf>.
- [11] Heiko Oberdiek. *The bookmark package*. Dec. 10, 2023.  
<https://mirrors.ctan.org/macros/latex/contrib/bookmark/bookmark.pdf>.
- [12] Heiko Oberdiek. *The zref package*. Sept. 14, 2023.  
<https://mirrors.ctan.org/macros/latex/contrib/zref/zref.pdf>.
- [13] Geoffrey M. Poore. *The minted package. Highlighted source code in L<sup>A</sup>T<sub>E</sub>X*. May 14, 2025.  
<https://mirror.ctan.org/macros/latex/contrib/minted/minted.pdf>.
- [14] The L<sup>A</sup>T<sub>E</sub>X3 Project. *The xparses Package*. Aug. 16, 2024.  
<https://mirror.ctan.org/macros/latex/contrib/l3packages/xpares.pdf>.
- [15] Pygments. *Python syntax highlighter*. 2025.  
<https://pygments.org/>.
- [16] Sebastian Rahtz and Heiko Oberdiek. *Hypertext marks in L<sup>A</sup>T<sub>E</sub>X: a manual for hyperref*. May 20, 2025.  
<https://mirrors.ctan.org/macros/latex/contrib/hyperref/doc/hyperref-doc.pdf>.
- [17] Will Robertson. *A couple of things involving environments*. May 4, 2014.  
<https://mirror.ctan.org/macros/latex/contrib/environ/environ.pdf>.
- [18] Rainer Schöpf, Bernd Raichle, and Chris Rowley. *A New Implementation of L<sup>A</sup>T<sub>E</sub>X's verbatim and verbatim\* Environments*. Nov. 6, 2023.  
<https://mirror.ctan.org/macros/latex/required/tools/verbatim.pdf>.
- [19] Thomas F. Sturm. *L<sup>A</sup>T<sub>E</sub>X- Einführung in das Textsatzsystem*. 12th edition. IT-Handbücher. Hannover: Leibnitz Universität Hannover IT Services (LUIIS), July 2019.  
<https://www.luis.uni-hannover.de/de/services/kurse-beratung-und-support/handbuecher/it-handbuecher-und-ebooks/details/manuals/latex>.
- [20] Thomas F. Sturm. *Höhere Mathematik: Fortgeschrittene mathematische Methoden (M.Eng.)* Vorlesungs-Skriptum. Neubiberg: Universität der Bundeswehr München, 2019.  
<https://www.unibw.de/bw/professuren/thomas-sturm>.

- [21] Thomas F. Sturm. *Mathematik 1 (B.Eng.)* Vorlesungs-Skriptum. Neubiberg: Universität der Bundeswehr München, 2019.  
<https://www.unibw.de/bw/professuren/thomas-sturm>.
- [22] Thomas F. Sturm. *Mathematik 2 (B.Eng.)* Vorlesungs-Skriptum. Neubiberg: Universität der Bundeswehr München, 2019.  
<https://www.unibw.de/bw/professuren/thomas-sturm>.
- [23] Till Tantau. *The TikZ and PGF Packages. Manual for version 3.1.10.* Jan. 15, 2023.  
<https://mirrors.ctan.org/graphics/pgf/base/doc/pgfmanual.pdf>.
- [24] Till Tantau, Joseph Wright, and Vedran Miletic. *The Beamer Class. User Guide for version 3.72.* Feb. 4, 2025.  
<https://mirrors.ctan.org/macros/latex/contrib/beamer/doc/beameruserguide.pdf>.
- [25] The L<sup>A</sup>T<sub>E</sub>X Project Team. *L<sup>A</sup>T<sub>E</sub>X for authors — current version.* May 1, 2025.  
<https://mirrors.ctan.org/macros/latex/base/usrguide.pdf>.

# Index

- key, 486  
**foo path (horizontal then vertical)** path operation, 513  
! key, 486  
  
0 value, 171  
1 value, 171  
2 value, 171  
  
above key, 452  
**absquote** environment, 506  
add to height key, 62  
add to list key, 137  
add to natural height key, 62  
add to width key, 41  
adjust text key, 24  
adjusted title key, 24  
adjusted title after break key, 409  
after key, 90  
after app key, 475  
after doc body key, 519  
after doc body command key, 518  
after doc body environment key, 518  
after doc body key key, 518  
after doc body path key, 519  
after float key, 89  
after float app key, 475  
after float pre key, 475  
after lower key, 75  
after lower app key, 473  
after lower pre key, 473  
after lower\* key, 75  
after pre key, 475  
after skip key, 92  
after skip balanced key, 91  
after title key, 71  
after title app key, 472  
after title pre key, 472  
after title\* key, 71  
after upper key, 73  
after upper app key, 472  
after upper pre key, 472  
after upper\* key, 73  
alert key, 292  
all key, 10  
all value, 55, 56, 322, 411, 414  
alt key, 292  
ams align key, 394  
ams align lower key, 394  
ams align upper key, 394  
ams align\* key, 394  
ams align\* lower key, 394  
ams align\* upper key, 394  
ams equation key, 393  
ams equation lower key, 393  
ams equation upper key, 393  
  
ams equation\* key, 393  
ams equation\* lower key, 393  
ams equation\* upper key, 393  
ams gather key, 395  
ams gather lower key, 395  
ams gather upper key, 395  
ams gather\* key, 395  
ams gather\* lower key, 395  
ams gather\* upper key, 395  
ams nodisplayskip key, 396  
ams nodisplayskip lower key, 396  
ams nodisplayskip upper key, 396  
arc key, 43  
arc is angular key, 45  
arc is curved key, 45  
areasize value, 468  
areasize\* value, 468  
as-is value, 287  
at key, 453  
at begin tikz key, 218  
at begin tikz reset key, 218  
at end tikz key, 218  
at end tikz reset key, 218  
attach boxed title to bottom key, 182  
attach boxed title to bottom center key, 181  
attach boxed title to bottom left key, 181  
attach boxed title to bottom right key, 181  
attach boxed title to bottom text left key, 181  
attach boxed title to bottom text right key, 181  
attach boxed title to top\* key, 182  
attach boxed title to top key, 182  
attach boxed title to top center key, 180  
attach boxed title to top left key, 180  
attach boxed title to top right key, 180  
attach boxed title to top text left key, 180  
attach boxed title to top text right key, 180  
attach boxed title to top\* key, 182  
attach title key, 26  
attach title to upper key, 26  
auto value, 113, 389  
auto counter key, 128  
auto limited value, 113  
auto outer arc key, 45  
autoparskip key, 94  
  
base value, 95  
base color key, 302  
baseline key, 95  
baselineskip value, 411  
beamer key, 262

`beamercolor` Skin, 262  
`beameralerted` key, 292  
`beamerdelayed` key, 292  
`beamercolorfirst` Skin, 264  
`beamercolorlast` Skin, 265  
`beamercolormiddle` Skin, 264  
`beamercolorarc` key, 44  
`beamercolorbefore` key, 90  
`beamercolorapp` key, 475  
`beamercolordocbody` key, 519  
`beamercolordocbodycommand` key, 518  
`beamercolordocbodyenvironment` key, 518  
`beamercolordocbodykey` key, 518  
`beamercolordocbodypath` key, 519  
`beamercolorfloat` key, 89  
`beamercolorfloatapp` key, 475  
`beamercolorfloatpre` key, 475  
`beamercolorlower` key, 74  
`beamercolorlowerapp` key, 473  
`beamercolorlowerpre` key, 473  
`beamercolorlower*` key, 74  
`beamercolornobreak` key, 96  
`beamercolorpre` key, 475  
`beamercolorskip` key, 92  
`beamercolorskipbalanced` key, 91  
`beamercolortitle` key, 71  
`beamercolortitleapp` key, 472  
`beamercolortitlepre` key, 472  
`beamercolortitle*` key, 71  
`beamercolorupper` key, 72  
`beamercolorupperapp` key, 472  
`beamercolorupperpre` key, 472  
`beamercolorupper*` key, 72  
`beamercolorafterskip` key, 92  
`beamercolorafterskipbalanced` key, 91  
`beamercolorbelow` key, 452  
`beamercolorbetween` key, 453  
`bicolor` key, 248  
`bicolor` Skin, 247  
`bicolorjigsaw` key, 254  
`bicolorjigsaw` Skin, 254  
`bicolorcolorfirst` Skin, 251  
`bicolorcolorfirstjigsaw` Skin, 255  
`bicolorcolorlast` Skin, 253  
`bicolorcolorlastjigsaw` Skin, 257  
`bicolorcolormiddle` Skin, 252  
`bicolorcolormiddlejigsaw` Skin, 256  
`blank` key, 237  
`blanker` key, 270  
`blankest` key, 271  
`blendbeforetitle` key, 133  
`blendbeforetitlecode` key, 134  
`blendinto` key, 132  
`bookmark` key, 117  
`bookmark*` key, 117  
`borderline` key, 203  
`borderlineeast` key, 206  
`borderlinehorizontal` key, 207  
`borderlinenorth` key, 206  
`borderlinesouth` key, 206  
`borderlinevertical` key, 207  
`borderlinewest` key, 206  
`both` value, 145  
`bottom` key, 50  
`bottom` value, 40, 95, 139, 321  
`bottomseam` value, 139  
`bottomrule` key, 42  
`bottomruleatbreak` key, 413  
`bottomsepatbreak` key, 413  
`bottomtitle` key, 50  
`boxalign` key, 95  
`\boxarrayclear`, 434  
`\boxarraygetbox`, 438  
`\boxarraygetdepth`, 439  
`\boxarraygetheight`, 439  
`\boxarraygetsize`, 436  
`\boxarraygettotalheight`, 440  
`\boxarraygetwidth`, 439  
`\boxarrayreset`, 433  
`boxarraystore` environment, 436  
`boxedtitlesize` key, 184  
`boxedtitlesize` key, 185  
`boxes` key, 448  
`boxrule` key, 43  
`boxsep` key, 46  
`\brackets`, 505  
`break` value, 398  
`breakat` key, 410  
`breakable` key, 9, 408  
`broken` value, 191–193  
`capture` key, 109  
`center` key, 100  
`center` value, 37, 40, 95, 139, 321  
`centerlower` key, 39  
`centerseam` value, 139  
`centertitle` key, 40  
`centerupper` key, 39  
`change` value, 398  
`changeapart` value, 398  
`changebreak` value, 398  
`changestandard` value, 397  
`checkoddpage` key, 118  
`circulararc` key, 44  
`clearpreamble` key, 493  
`clearpreclass` key, 493  
`cliplower` key, 202  
`cliptitle` key, 201  
`clipupper` key, 201  
`clipwatermark` key, 197  
`clipped` value, 303  
`code` key, 123  
`colback` key, 34  
`colbacklower` key, 249  
`colbacktitle` key, 34  
`\colDef`, 510  
`\colFade`, 510  
`colframe` key, 34  
`collower` key, 35

```

colon value, 133
colon hang value, 133
\colOpt, 510
color key, 524
color color key, 523
color command key, 523
color counter key, 523
color definition key, 523
color environment key, 523
color fade key, 523
color from key, 302
color hyperlink key, 523
color key key, 523
color length key, 523
color option key, 523
color path key, 523
color value key, 523
Colors
  Definition, 525
  ExampleBack, 525
  ExampleFrame, 525
  Fade, 525
  foocolor, 504
  Hyperlink, 525
  Option, 525
  tcbcolback, 169
  tcbcolbacklower, 169
  tcbcolbacktitle, 169
  tcbcolframe, 169
  tcbcollower, 169
  tcbcoltitle, 169
  tcbcolupper, 169
colors key, 524
colspacing key, 446
coltext key, 35
coltitle key, 35
column key, 450
column* key, 450
columns key, 446
colupper key, 35
Commands
  \boxarrayclear, 434
  \boxarraygetbox, 438
  \boxarraygetdepth, 439
  \boxarraygetheight, 439
  \boxarraygetsize, 436
  \boxarraygettatalheight, 440
  \boxarraygetwidth, 439
  \boxarrayreset, 433
  \brackets, 505
  \colDef, 510
  \colFade, 510
  \colOpt, 510
  \consumeboxarray, 437
  \consumetboxarray, 437
  \cs, 504
  \ProvideTCBInputListing, 342
  \ProvideTCBListing, 339
  \ProvideTCBox, 21
  \DeclareTCBInputListing, 460
  \DeclareTCBListing, 381
  \DeclareTCBox, 18
  \DeclareTotalTCBox, 23
  \DeclareTotalTCBoxFit, 461
  \DeclareTotalTColorBox, 19
  \docAuxCommand, 503
  \docAuxCommand*, 503
  \docAuxEnvironment, 503
  \docAuxEnvironment*, 503
  \docAuxKey, 503
  \docAuxKey*, 503
  \docColor, 504
  \docColor*, 504
  \docCounter, 503
  \docCounter*, 503
  \docLength, 504
  \docLength*, 504
  \docValue, 503
  \docValue*, 503
  \fooaux, 503, 521
  \foomakedocSubKey, 498
  \foosomething, 514
  \ifboxarrayempty, 438
  \imagename, 284
  \imagepage, 285
  \marg, 504
  \meta, 504
  \newboxarray, 433
  \newtcbexternalizeenvironment, 494
  \newtcbexternalizetcolorbox, 494
  \NewTCBInputListing, 342
  \newtcbinputlisting, 341
  \NewTCBListing, 339
  \newtcblisting, 337
  \NewTCBox, 21
  \newtcbox, 20
  \NewTCBoxFit, 460
  \newtboxfit, 459
  \NewTcbTheorem, 379
  \newtcbtheorem, 379
  \NewTColorBox, 17
  \newtcolorbox, 16
  \NewTotalTCBox, 22
  \NewTotalTCBoxFit, 461
  \NewTotalTColorBox, 19
  \oarg, 504
  \pbarg, 505
  \pdfpages, 286
  \posterbox, 449
  \ProvideTCBInputListing, 342
  \ProvideTCBListing, 339
  \ProvideTCBox, 21
  \ProvideTCBoxFit, 460
  \ProvideTcbTheorem, 381
  \ProvideTColorBox, 18
  \ProvideTotalTCBox, 23
  \ProvideTotalTCBoxFit, 461
  \ProvideTotalTColorBox, 19

```

```

\refAux, 509
\refAuxcs, 509
\refCom, 508
\refCom*, 508
\refEnv, 508
\refEnv*, 508
\refKey, 508
\refKey*, 508
\refPathOperation, 509
\refPathOperation*, 509
\refPkg, 509
\renewtcbexternalizeenvironment, 494
\renewtcbexternalizetcolorbox, 495
\RenewTCBInputListing, 342
\renewtcbinputlisting, 341
\RenewTCBListing, 339
\renewtcblisting, 338
\RenewTCBox, 21
\renewtcbox, 21
\RenewTCBoxFit, 460
\renewtcboxfit, 459
\RenewTcbTheorem, 381
\renewtcbtheorem, 381
\RenewTColorBox, 18
\renewtcolorbox, 16
\RenewTotalTCBox, 23
\RenewTotalTCBoxFit, 461
\RenewTotalTColorBox, 19
\sarg, 505
\skinExampleSet, 232
\tcbbreak, 421
\tcbcontinuedraftmode, 229
\tcbcounter, 128
\tcbdocmarginnote, 510
\tcbdocnew, 510
\tcbdochupdated, 510
\tcbEXTERNALIZE, 486
\tcbfitdim, 458
\tcbfitsteps, 462
\tcbfontsize, 458
\tcbheightfromgroup, 70
\tcbheightspace, 170
\tcbhighmath, 382
\tcbhypernode, 289
\tcbifexternal, 493
\tcbiffileprocess, 495
\tcbifoddpage, 120
\tcbifoddpageoroneside, 120
\tcbincludegraphics, 283
\tcbincludepdf, 285
\tcbinputlisting, 336
\tcbinputrecords, 151
\tcbinterruptdraftmode, 229
\tcbitem, 314
\tcbline, 238
\tcbline*, 238
\tcblistof, 136
\tcblower, 12
\tcbmakedocSubKey, 507
\tcbmakedocSubKeys, 507
\tcboverlaplower, 250
\tcbox, 14
\tcboxedittitleheight, 183
\tcboxeditwidth, 183
\tcboxfit, 457
\tcboxmath, 382
\tcboxverb, 15
\tcbpatcharcangular, 288
\tcbpatcharcround, 288
\tcbpostercolspacing, 445
\tcbpostercolumns, 445
\tcbpostercolwidth, 445
\tcbposterheight, 445
\tcbposterrowheight, 445
\tcbposterrows, 445
\tcbposterrowspacing, 445
\tcbposterset, 445
\tcbposterwidth, 445
\tcbrecord, 151
\tcbsegmentstate, 171
\tcbset, 13
\tcbsetforeverylayer, 13
\tcbsetmacrotoheightofnode, 289
\tcbsetmacrotowidthofnode, 289
\tcbsetmanagedlayers, 107
\tcbsettoheightofnode, 289
\tcbsettowidthofnode, 289
\tcbsidebyside, 144
\tcbstartdraftmode, 229
\tcbstartrecording, 151
\tcbstopdraftmode, 229
\tcbstoprecording, 151
\tcbsubskin, 164
\tcbsubtitle, 27
\tcbtextheight, 171
\tcbtextwidth, 170
\tcbtitle, 26
\tcbtitletext, 26
\tcbuselibrary, 9
\tcbuselistlisting, 336
\tcbuselisttext, 336
\tcbusettemp, 148
\tcbusetemplisting, 336
\tcbvignette, 298
\tcolorboxenvironment, 23
\thetcbcounter, 128, 129
\thetcbrasternum, 313, 325
\thetcboxnumber, 121
\thetcboxpage, 121
\useboxarray, 436
\usetboxarray, 437
commands key, 524
comment key, 349
comment above listing key, 357
comment above* listing key, 357
comment and listing key, 352
comment only key, 349
comment outside listing key, 355

```

**comment side listing** key, 354  
**comment style** key, 352  
**compilable listing** key, 361  
**compiler** key, 492  
**compress page** key, 411  
**\consumeboxarray**, 437  
**\consumetboxarray**, 437  
**copy** value, 184  
**counter** key, 524  
 Counters  
**foocounter**, 503  
**tcbbreakpart**, 408  
**tcblayer**, 106  
**tcbrastercolumn**, 313  
**tcbrasternum**, 313  
**tcbrasterrow**, 313  
**counters** key, 524  
**coverage** key, 447  
**Crefname** key, 131  
**crefname** key, 131  
**\cs**, 504  
**ctan formatter** key, 521  
  
**dash** value, 133  
**dash hang** value, 133  
**\DeclareTCBInputListing**, 342  
**\DeclareTCBListing**, 339  
**\DeclareTCBox**, 21  
**\DeclareTCBoxFit**, 460  
**\DeclareTcbTheorem**, 381  
**\DeclareTColorBox**, 18  
**\DeclareTotalTCBox**, 23  
**\DeclareTotalTCBoxFit**, 461  
**\DeclareTotalTColorBox**, 19  
**default minted options** key, 347  
 Definition color, 525  
**description color** key, 385  
**description delimiters** key, 385  
**description delimiters none** key, 385  
**description delimiters parenthesis** key, 385  
**description font** key, 386  
**description formatter** key, 386  
**detach title** key, 26  
**direct** value, 303  
**dispExample** environment, 505  
**dispExample\*** environment, 505  
**dispListing** environment, 506  
**dispListing\*** environment, 506  
**do not store to box array** key, 436  
**doc** value, 522  
**doc description** key, 513  
**doc head** key, 517  
**doc head command** key, 516  
**doc head environment** key, 517  
**doc head key** key, 517  
**doc head path** key, 517  
**doc index** key, 513  
**doc into index** key, 514  
**doc key prefix** key, 512  
**doc keypath** key, 511  
**doc label** key, 513  
**doc left** key, 515  
**doc left indent** key, 515  
**doc marginnote** key, 514  
**doc name** key, 511  
**doc new** key, 514  
**doc new and updated** key, 514  
**doc no index** key, 514  
**doc parameter** key, 511  
**doc raster** key, 516  
**doc raster command** key, 516  
**doc raster environment** key, 516  
**doc raster key** key, 516  
**doc raster path** key, 516  
**doc right** key, 515  
**doc right indent** key, 515  
**doc sort index** key, 513  
**doc updated** key, 514  
**\docAuxCommand**, 503  
**\docAuxCommand\***, 503  
**\docAuxEnvironment**, 503  
**\docAuxEnvironment\***, 503  
**\docAuxKey**, 503  
**\docAuxKey\***, 503  
**\docColor**, 504  
**\docColor\***, 504  
**docCommand** environment, 497  
**docCommand\*** environment, 498  
**docCommands** environment, 498  
**\docCounter**, 503  
**\docCounter\***, 503  
**docEnvironment** environment, 499  
**docEnvironment\*** environment, 499  
**docEnvironments** environment, 500  
**doceexample** key, 520  
**docKey** environment, 501  
**docKey\*** environment, 501  
**docKeys** environment, 501  
**\docLength**, 504  
**\docLength\***, 504  
**docPathOperation** environment, 502  
**docPathOperation\*** environment, 502  
**docPathOperations** environment, 502  
**documentation** key, 10  
**documentation listing options** key, 520  
**documentation listing style** key, 520  
**documentation minted language** key, 520  
**documentation minted options** key, 520  
**documentation minted style** key, 520  
**\docValue**, 503  
**\docValue\***, 503  
**downhill** value, 55, 56  
**draft** key, 280  
**draft Skin**, 280  
**draftmode** key, 230  
**draw method** key, 303  
**drop fuzzy midday shadow** key, 209  
**drop fuzzy shadow** key, 208

**drop fuzzy shadow east** key, 212  
**drop fuzzy shadow north** key, 212  
**drop fuzzy shadow northeast** key, 212  
**drop fuzzy shadow northwest** key, 212  
**drop fuzzy shadow south** key, 211  
**drop fuzzy shadow southeast** key, 211  
**drop fuzzy shadow southwest** key, 211  
**drop fuzzy shadow west** key, 211  
**drop large lifted shadow** key, 213  
**drop lifted shadow** key, 213  
**drop midday shadow** key, 208  
**drop shadow** key, 208  
**drop shadow east** key, 211  
**drop shadow north** key, 210  
**drop shadow northeast** key, 211  
**drop shadow northwest** key, 210  
**drop shadow south** key, 210  
**drop shadow southeast** key, 210  
**drop shadow southwest** key, 210  
**drop shadow west** key, 210  
**drop small lifted shadow** key, 213  
  
**east fading**, 303  
**east value**, 55, 56  
**east size** key, 300  
**east style** key, 301  
**empty** key, 269  
**empty Skin**, 269  
**empty** value, 158, 159  
**emptyfirst Skin**, 272  
**emptylast Skin**, 274  
**emptymiddle Skin**, 273  
**enforce breakable** key, 409  
**english language** key, 524  
**enhanced** key, 235  
**enhanced Skin**, 235  
**enhanced jigsaw** key, 241  
**enhanced jigsaw Skin**, 241  
**enhanced standard** key, 237  
**enhanced standard jigsaw** key, 241  
**enhancedfirst Skin**, 239  
**enhancedfirst jigsaw Skin**, 242  
**enhancedlast Skin**, 240  
**enhancedlast jigsaw Skin**, 246  
**enhancedmiddle Skin**, 239  
**enhancedmiddle jigsaw Skin**, 243  
**enlarge bottom at break by** key, 98  
**enlarge bottom by** key, 98  
**enlarge bottom finally by** key, 97  
**enlarge by** key, 99  
**enlarge left by** key, 98  
**enlarge right by** key, 98  
**enlarge top at break by** key, 98  
**enlarge top by** key, 98  
**enlarge top initially by** key, 97  
**enlargepage** key, 410  
**enlargepage flexible** key, 411  
**environment** key, 492, 524  
**environment content** key, 524  
**environment lower** key, 82  
  
**environment lower app** key, 474  
**environment lower args** key, 82  
**environment lower args app** key, 474  
**environment lower args pre** key, 474  
**environment lower pre** key, 474  
**environment title** key, 82  
**environment title app** key, 474  
**environment title args** key, 82  
**environment title args app** key, 474  
**environment title args pre** key, 474  
**environment title pre** key, 474  
**environment upper** key, 81  
**environment upper app** key, 474  
**environment upper args** key, 81  
**environment upper args app** key, 474  
**environment upper args pre** key, 474  
**environment upper pre** key, 474  
**environment with percent** key, 492  
**Environments**  
**absquote**, 506  
**boxarraystore**, 436  
**dispExample**, 505  
**dispExample\***, 505  
**dispListing**, 506  
**dispListing\***, 506  
**docCommand**, 497  
**docCommand\***, 498  
**docCommands**, 498  
**docEnvironment**, 499  
**docEnvironment\***, 499  
**docEnvironments**, 500  
**docKey**, 501  
**docKey\***, 501  
**docKeys**, 501  
**docPathOperation**, 502  
**docPathOperation\***, 502  
**docPathOperations**, 502  
**extcolorbox**, 489  
**extikzpicture**, 490  
**fooauxenv**, 503  
**foocolorbox**, 499  
**foocolorbox\***, 499  
**posterboxenv**, 449  
**tcbclipframe**, 198  
**tcbclipinterior**, 200  
**tcbcliptitle**, 200  
**tcbexternal**, 487  
**tcbinvclipframe**, 199  
**tcbitemize**, 314  
**tcblisting**, 334  
**tcboutputlisting**, 336  
**tcboxeditemize**, 316  
**tcboxedraster**, 315  
**tcbposter**, 444  
**tcraster**, 313  
**tcbverbatimwrite**, 148  
**tcbwritetemp**, 148  
**tcolorbox**, 12  
**environments** key, 524

**equal height group** key, 68  
**evenpage** value, 53, 101  
**every box** key, 106  
**every box on higher layers** key, 107  
**every box on layer n** key, 107  
**every float** key, 89  
**every listing line** key, 344  
**every listing line\*** key, 344  
**ExampleBack** color, 525  
**ExampleFrame** color, 525  
**extcolorbox** environment, 489  
**extend freelance** key, 282  
**extend freelancefirst** key, 282  
**extend freelancelast** key, 282  
**extend freelancemiddle** key, 282  
**external** key, 10, 122  
**externalize** key, 486  
**externalize example** key, 491  
**externalize example!** key, 491  
**externalize listing** key, 491  
**externalize listing!** key, 491  
**extikzpicture** environment, 490  
**extras** key, 415  
**extras broken** key, 415  
**extras broken pre** key, 483  
**extras first** key, 415  
**extras first and middle** key, 416  
**extras first and middle pre** key, 483  
**extras first pre** key, 483  
**extras last** key, 415  
**extras last pre** key, 483  
**extras middle** key, 415  
**extras middle and last** key, 415  
**extras middle and last pre** key, 483  
**extras middle pre** key, 483  
**extras pre** key, 483  
**extras title after break** key, 416  
**extras unbroken** key, 415  
**extras unbroken and first** key, 415  
**extras unbroken and first pre** key, 483  
**extras unbroken and last** key, 415  
**extras unbroken and last pre** key, 483  
**extras unbroken pre** key, 483  
**extrude bottom by** key, 105  
**extrude by** key, 105  
**extrude left by** key, 104  
**extrude right by** key, 104  
**extrude top by** key, 105  
  
**Fade** color, 525  
**fade in** key, 304  
**fade out** key, 304  
**Fadings**  
    **east**, 303  
    **north**, 303  
    **semi east**, 303  
    **semi north**, 303  
    **semi south**, 303  
    **semi west**, 303  
    **south**, 303  
  
**west**, 303  
**false** value, 90, 96, 323, 408  
**fbox** value, 51  
**figures** value, 132  
**fill downwards** key, 102  
**final** value, 470  
**finish** key, 223  
**finish broken** key, 224  
**finish broken pre** key, 481  
**finish fading vignette** key, 309  
**finish first** key, 224  
**finish first and middle** key, 224  
**finish first and middle pre** key, 481  
**finish first pre** key, 481  
**finish last** key, 224  
**finish last pre** key, 481  
**finish middle** key, 224  
**finish middle and last** key, 224  
**finish middle and last pre** key, 481  
**finish middle pre** key, 481  
**finish pre** key, 481  
**finish raised fading vignette** key, 308  
**finish unbroken** key, 224  
**finish unbroken and first** key, 224  
**finish unbroken and first pre** key, 481  
**finish unbroken and last** key, 224  
**finish unbroken and last pre** key, 481  
**finish unbroken pre** key, 481  
**finish vignette** key, 308  
**first** value, 191–193, 414  
**first and middle** value, 191, 414  
**fit** key, 462  
    **fit algorithm** key, 468  
    **fit basedim** key, 463  
    **fit fontsize macros** key, 464  
    **fit height from** key, 467  
    **fit height plus** key, 465  
    **fit maxfontdiff** key, 470  
    **fit maxfontdiffgap** key, 470  
    **fit maxstep** key, 470  
    **fit maxwidthdiff** key, 470  
    **fit maxwidthdiffgap** key, 470  
    **fit skip** key, 463  
    **fit to** key, 463  
    **fit to height** key, 463  
    **fit warning** key, 470  
    **fit width from** key, 466  
    **fit width plus** key, 465  
**fitbox** value, 109  
**fitting** key, 9  
**fixed height** key, 451  
**flip title** key, 182  
**float** key, 88  
**float\*** key, 88  
**floatplacement** key, 88  
**flush center** value, 37, 39, 40  
**flush left** key, 100  
**flush left** value, 37, 39, 40  
**flush right** key, 100

**flush right** value, 37, 39, 40  
**flushleft lower** key, 39  
**flushleft title** key, 40  
**flushleft upper** key, 39  
**flushright lower** key, 39  
**flushright title** key, 40  
**flushright upper** key, 39  
**fontlower** key, 36  
**fontsize** key, 448  
**fontsize** value, 468  
**fontsize\*** value, 468  
**fonttitle** key, 36  
**fontupper** key, 36  
**foo expl** key (l3keys), 512  
**foo pgf** key (pgfkeys), 512  
\fooaux, 503, 521  
**fooaux** key, 503  
**fooauxenv** environment, 503  
**foocolor** color, 504  
**foocolorbox** environment, 499  
**foocolorbox\*** environment, 499  
**foocounter** counter, 503  
**foodummy** key, 507  
**foodummy 2** key, 507  
\foolength length, 504  
\foomakedocSubKey, 498  
**fooop** path operation, 502  
\foosomething, 514  
**footitle** key, 501  
**force nobeforeafter** key, 90  
**force remake** key, 486  
**forced** value, 53, 101  
**forced center** value, 113  
**forced left** value, 113  
**forced right** value, 113  
**frame code** key, 161  
**frame code app** key, 481  
**frame code pre** key, 481  
**frame empty** key, 161  
**frame engine** key, 158  
**frame hidden** key, 173  
**frame style** key, 172  
**frame style image** key, 172  
**frame style tile** key, 173  
**freelance** key, 282  
**freelance Skin**, 282  
**freelance** value, 158, 159  
**freelancefirst** Skin, 282  
**freelancelast** Skin, 282  
**freelancemiddle** Skin, 282  
**freeze extension** key, 365  
**freeze file** key, 365  
**freeze jpg** key, 365  
**freeze none** key, 365  
**freeze pdf** key, 365  
**freeze png** key, 365  
**fuzzy halo** key, 209  
**fuzzy shadow** key, 215  
**geometry nodes** key, 160  
**graphics directory** key, 286  
**graphics options** key, 286  
**graphics orientation** key, 287  
**graphics pages** key, 286  
**grow sideways by** key, 100  
**grow to left by** key, 99  
**grow to right by** key, 99  
**halign** key, 37  
**halign code** key, 38  
**halign lower** key, 38  
**halign lower code** key, 38  
**halign title** key, 39  
**halign title code** key, 39  
**halign upper** key, 37  
**halign upper code** key, 38  
**halo** key, 209  
**hbox** key, 109  
**hbox** value, 109  
**hbox boxed title** key, 189  
**height** key, 60, 446  
**height fill** key, 63  
**height fixed for** key, 414  
**height from** key, 61  
**height plus** key, 60  
**hide** key, 292  
**highlight math** key, 392  
**highlight math style** key, 392  
**hooks** key, 9  
**horizontal size** key, 301  
**hybrid** value, 468  
**hybrid\*** value, 468  
**Hyperlink** color, 525  
**hyperlink** key, 225  
**hyperlink interior** key, 226  
**hyperlink node** key, 226  
**hyperlink title** key, 226  
**hyperref** key, 225  
**hyperref interior** key, 225  
**hyperref node** key, 225  
**hyperref title** key, 225  
**hypertarget** key, 117  
**hyperurl** key, 226  
**hyperurl interior** key, 226  
**hyperurl node** key, 226  
**hyperurl title** key, 226  
**hyperurl\*** key, 226  
**hyperurl\* interior** key, 226  
**hyperurl\* node** key, 226  
**hyperurl\* title** key, 226  
**hyphenationfix** key, 111  
**if odd page** key, 118  
**if odd page or oneside** key, 118  
**if odd page or oneside\*** key, 119  
**if odd page\*** key, 119  
**IfBlankF** key, 124  
**IfBlankT** key, 124  
**IfBlankTF** key, 124  
**IfBooleanF** key, 126

**IfBooleanT** key, 126  
**IfBooleanTF** key, 126  
**\ifboxarrayempty**, 438  
**IfEmptyF** key, 124  
**IfEmptyT** key, 124  
**IfEmptyTF** key, 124  
**IfNoValueF** key, 125  
**IfNoValueT** key, 125  
**IfNoValueTF** key, 125  
**IfValueF** key, 125  
**IfValueT** key, 125  
**IfValueTF** key, 125  
**ignore nobreak** key, 96  
**ignored** value, 30, 31  
**image comment** key, 349  
**\imagename**, 284  
**\imagepage**, 285  
**index** key, 117, 524  
**index actual** key, 522  
**index annotate** key, 522  
**index colorize** key, 522  
**index command** key, 521  
**index command name** key, 521  
**index default settings** key, 522  
**index format** key, 522  
**index gather all** key, 522  
**index gather colors** key, 522  
**index gather commands** key, 522  
**index gather counters** key, 522  
**index gather environments** key, 522  
**index gather keys** key, 522  
**index gather lengths** key, 522  
**index gather none** key, 522  
**index gather paths** key, 522  
**index gather values** key, 522  
**index german settings** key, 522  
**index key formatter** key, 512  
**index keys formatter** key, 512  
**index level** key, 522  
**index quote** key, 522  
**index\*** key, 117  
**inherit height** key, 64  
**input source on error** key, 492  
**inside node** key, 299  
**interior code** key, 162  
**interior code app** key, 482  
**interior code pre** key, 482  
**interior empty** key, 162  
**interior engine** key, 159  
**interior hidden** key, 174  
**interior style** key, 173  
**interior style image** key, 174  
**interior style tile** key, 174  
**interior titled code** key, 161  
**interior titled code app** key, 481  
**interior titled code pre** key, 482  
**interior titled empty** key, 161  
**interior titled engine** key, 158  
**invisible** key, 28  
**invisible** value, 25, 28, 30  
**justify** value, 37  
**key** key, 524  
**Keys**  
**/foo/**  
**fooaux**, 503  
**foodummy**, 507  
**foodummy 2**, 507  
**footitle**, 501  
**myKey**, 517  
**/tcb/**  
**add to height**, 62  
**add to list**, 137  
**add to natural height**, 62  
**add to width**, 41  
**adjust text**, 24  
**adjusted title**, 24  
**adjusted title after break**, 409  
**after**, 90  
**after app**, 475  
**after doc body**, 519  
**after doc body command**, 518  
**after doc body environment**, 518  
**after doc body key**, 518  
**after doc body path**, 519  
**after float**, 89  
**after float app**, 475  
**after float pre**, 475  
**after lower**, 75  
**after lower app**, 473  
**after lower pre**, 473  
**after lower\***, 75  
**after pre**, 475  
**after skip**, 92  
**after skip balanced**, 91  
**after title**, 71  
**after title app**, 472  
**after title pre**, 472  
**after title\***, 71  
**after upper**, 73  
**after upper app**, 472  
**after upper pre**, 472  
**after upper\***, 73  
**alert**, 292  
**alt**, 292  
**ams align**, 394  
**ams align lower**, 394  
**ams align upper**, 394  
**ams align\***, 394  
**ams align\* lower**, 394  
**ams align\* upper**, 394  
**ams equation**, 393  
**ams equation lower**, 393  
**ams equation upper**, 393  
**ams equation\***, 393  
**ams equation\* lower**, 393  
**ams equation\* upper**, 393  
**ams gather**, 395

ams gather lower, 395  
 ams gather upper, 395  
 ams gather\*, 395  
 ams gather\* lower, 395  
 ams gather\* upper, 395  
 ams nodisplayskip, 396  
 ams nodisplayskip lower, 396  
 ams nodisplayskip upper, 396  
 arc, 43  
 arc is angular, 45  
 arc is curved, 45  
 at begin tikz, 218  
 at begin tikz reset, 218  
 at end tikz, 218  
 at end tikz reset, 218  
 attach boxed title to bottom, 182  
 attach boxed title to bottom center, 181  
 attach boxed title to bottom left, 181  
 attach boxed title to bottom right, 181  
 attach boxed title to bottom text left, 181  
 attach boxed title to bottom text right, 181  
 attach boxed title to bottom\*, 182  
 attach boxed title to top, 182  
 attach boxed title to top center, 180  
 attach boxed title to top left, 180  
 attach boxed title to top right, 180  
 attach boxed title to top text left, 180  
 attach boxed title to top text right, 180  
 attach boxed title to top\*, 182  
 attach title, 26  
 attach title to upper, 26  
 auto outer arc, 45  
 autoparskip, 94  
 baseline, 95  
 beamer, 262  
 beamer alerted, 292  
 beamer hidden, 292  
 bean arc, 44  
 before, 90  
 before app, 475  
 before doc body, 519  
 before doc body command, 518  
 before doc body environment, 518  
 before doc body key, 518  
 before doc body path, 519  
 before float, 89  
 before float app, 475  
 before float pre, 475  
 before lower, 74  
 before lower app, 473  
 before lower pre, 473  
 before lower\*, 74  
 before nobreak, 96  
 before pre, 475  
 before skip, 92  
 before skip balanced, 91  
 before title, 71  
 before title app, 472  
 before title pre, 472  
 before title\*, 71  
 before upper, 72  
 before upper app, 472  
 before upper pre, 472  
 before upper\*, 72  
 beforeafter skip, 92  
 beforeafter skip balanced, 91  
 bicolor, 248  
 bicolor jigsaw, 254  
 blank, 237  
 blanker, 270  
 blankest, 271  
 blend before title, 133  
 blend before title code, 134  
 bookmark, 117  
 bookmark\*, 117  
 borderline, 203  
 borderline east, 206  
 borderline horizontal, 207  
 borderline north, 206  
 borderline south, 206  
 borderline vertical, 207  
 borderline west, 206  
 bottom, 50  
 bottomrule, 42  
 bottomrule at break, 413  
 bottomsep at break, 413  
 bottomtitle, 50  
 box align, 95  
 boxed title size, 184  
 boxed title style, 185  
 boxrule, 43  
 boxsep, 46  
 break at, 410  
 breakable, 408  
 capture, 109  
 center, 100  
 center lower, 39  
 center title, 40  
 center upper, 39  
 check odd page, 118  
 circular arc, 44  
 clip lower, 202  
 clip title, 201  
 clip upper, 201  
 clip watermark, 197  
 code, 123  
 colback, 34  
 colbacklower, 249  
 colbacktitle, 34

`colframe`, 34  
`collower`, 35  
`color color`, 523  
`color command`, 523  
`color counter`, 523  
`color definition`, 523  
`color environment`, 523  
`color fade`, 523  
`color hyperlink`, 523  
`color key`, 523  
`color length`, 523  
`color option`, 523  
`color path`, 523  
`color value`, 523  
`coltext`, 35  
`coltitle`, 35  
`colupper`, 35  
`comment`, 349  
`comment above listing`, 357  
`comment above* listing`, 357  
`comment and listing`, 352  
`comment only`, 349  
`comment outside listing`, 355  
`comment side listing`, 354  
`comment style`, 352  
`compilable listing`, 361  
`compress page`, 411  
`ctan formatter`, 521  
`default minted options`, 347  
`description color`, 385  
`description delimiters`, 385  
`description delimiters none`, 385  
`description delimiters parenthesis`, 385  
`description font`, 386  
`description formatter`, 386  
`detach title`, 26  
`do not store to box array`, 436  
`doc description`, 513  
`doc head`, 517  
`doc head command`, 516  
`doc head environment`, 517  
`doc head key`, 517  
`doc head path`, 517  
`doc index`, 513  
`doc into index`, 514  
`doc key prefix`, 512  
`doc keypath`, 511  
`doc label`, 513  
`doc left`, 515  
`doc left indent`, 515  
`doc marginnote`, 514  
`doc name`, 511  
`doc new`, 514  
`doc new and updated`, 514  
`doc no index`, 514  
`doc parameter`, 511  
`doc raster`, 516  
`doc raster command`, 516  
`doc raster environment`, 516  
`doc raster key`, 516  
`doc raster path`, 516  
`doc right`, 515  
`doc right indent`, 515  
`doc sort index`, 513  
`doc updated`, 514  
`doexample`, 520  
`documentation listing options`, 520  
`documentation listing style`, 520  
`documentation minted language`, 520  
`documentation minted options`, 520  
`documentation minted style`, 520  
`draft`, 280  
`draftmode`, 230  
`drop fuzzy midday shadow`, 209  
`drop fuzzy shadow`, 208  
`drop fuzzy shadow east`, 212  
`drop fuzzy shadow north`, 212  
`drop fuzzy shadow northeast`, 212  
`drop fuzzy shadow northwest`, 212  
`drop fuzzy shadow south`, 211  
`drop fuzzy shadow southeast`, 211  
`drop fuzzy shadow southwest`, 211  
`drop fuzzy shadow west`, 211  
`drop large lifted shadow`, 213  
`drop lifted shadow`, 213  
`drop midday shadow`, 208  
`drop shadow`, 208  
`drop shadow east`, 211  
`drop shadow north`, 210  
`drop shadow northeast`, 211  
`drop shadow northwest`, 210  
`drop shadow south`, 210  
`drop shadow southeast`, 210  
`drop shadow southwest`, 210  
`drop shadow west`, 210  
`drop small lifted shadow`, 213  
`empty`, 269  
`enforce breakable`, 409  
`english language`, 524  
`enhanced`, 235  
`enhanced jigsaw`, 241  
`enhanced standard`, 237  
`enhanced standard jigsaw`, 241  
`enlarge bottom at break by`, 98  
`enlarge bottom by`, 98  
`enlarge bottom finally by`, 97  
`enlarge by`, 99  
`enlarge left by`, 98  
`enlarge right by`, 98  
`enlarge top at break by`, 98  
`enlarge top by`, 98  
`enlarge top initially by`, 97  
`enlargepage`, 410  
`enlargepage flexible`, 411  
`environment lower`, 82  
`environment lower app`, 474  
`environment lower args`, 82

environment lower args app, 474  
 environment lower args pre, 474  
 environment lower pre, 474  
 environment title, 82  
 environment title app, 474  
 environment title args, 82  
 environment title args app, 474  
 environment title args pre, 474  
 environment title pre, 474  
 environment upper, 81  
 environment upper app, 474  
 environment upper args, 81  
 environment upper args app, 474  
 environment upper args pre, 474  
 environment upper pre, 474  
 equal height group, 68  
 every box, 106  
 every box on higher layers, 107  
 every box on layer n, 107  
 every float, 89  
 every listing line, 344  
 every listing line\*, 344  
 extend freelance, 282  
 extend freelancefirst, 282  
 extend freelancelast, 282  
 extend freelancemiddle, 282  
 external, 122  
 externalize example, 491  
 externalize example!, 491  
 externalize listing, 491  
 externalize listing!, 491  
 extras, 415  
 extras broken, 415  
 extras broken pre, 483  
 extras first, 415  
 extras first and middle, 416  
 extras first and middle pre, 483  
 extras first pre, 483  
 extras last, 415  
 extras last pre, 483  
 extras middle, 415  
 extras middle and last, 415  
 extras middle and last pre, 483  
 extras middle pre, 483  
 extras pre, 483  
 extras title after break, 416  
 extras unbroken, 415  
 extras unbroken and first, 415  
 extras unbroken and first pre, 483  
 extras unbroken and last, 415  
 extras unbroken and last pre, 483  
 extras unbroken pre, 483  
 extrude bottom by, 105  
 extrude by, 105  
 extrude left by, 104  
 extrude right by, 104  
 extrude top by, 105  
 fill downwards, 102  
 finish, 223  
 finish broken, 224  
 finish broken pre, 481  
 finish fading vignette, 309  
 finish first, 224  
 finish first and middle, 224  
 finish first and middle pre, 481  
 finish first pre, 481  
 finish last, 224  
 finish last pre, 481  
 finish middle, 224  
 finish middle and last, 224  
 finish middle and last pre, 481  
 finish middle pre, 481  
 finish pre, 481  
 finish raised fading vignette, 308  
 finish unbroken, 224  
 finish unbroken and first, 224  
 finish unbroken and first pre, 481  
 finish unbroken and last, 224  
 finish unbroken and last pre, 481  
 finish unbroken pre, 481  
 finish vignette, 308  
 fit, 462  
 fit algorithm, 468  
 fit basedim, 463  
 fit fontsize macros, 464  
 fit height from, 467  
 fit height plus, 465  
 fit maxfontdiff, 470  
 fit maxfontdiffgap, 470  
 fit maxstep, 470  
 fit maxwidthdiff, 470  
 fit maxwidthdiffgap, 470  
 fit skip, 463  
 fit to, 463  
 fit to height, 463  
 fit warning, 470  
 fit width from, 466  
 fit width plus, 465  
 flip title, 182  
 float, 88  
 float\*, 88  
 floatplacement, 88  
 flush left, 100  
 flush right, 100  
 flushleft lower, 39  
 flushleft title, 40  
 flushleft upper, 39  
 flushright lower, 39  
 flushright title, 40  
 flushright upper, 39  
 fontlower, 36  
 fonttitle, 36  
 fontupper, 36  
 force nobeforeafter, 90  
 frame code, 161  
 frame code app, 481  
 frame code pre, 481  
 frame empty, 161

**frame engine**, 158  
**frame hidden**, 173  
**frame style**, 172  
**frame style image**, 172  
**frame style tile**, 173  
**freelance**, 282  
**freeze extension**, 365  
**freeze file**, 365  
**freeze jpg**, 365  
**freeze none**, 365  
**freeze pdf**, 365  
**freeze png**, 365  
**fuzzy halo**, 209  
**fuzzy shadow**, 215  
**geometry nodes**, 160  
**graphics directory**, 286  
**graphics options**, 286  
**graphics orientation**, 287  
**graphics pages**, 286  
**grow sideways by**, 100  
**grow to left by**, 99  
**grow to right by**, 99  
**halign**, 37  
**halign code**, 38  
**halign lower**, 38  
**halign lower code**, 38  
**halign title**, 39  
**halign title code**, 39  
**halign upper**, 37  
**halign upper code**, 38  
**halo**, 209  
**hbox**, 109  
**hbox boxed title**, 189  
**height**, 60  
**height fill**, 63  
**height fixed for**, 414  
**height from**, 61  
**height plus**, 60  
**hide**, 292  
**highlight math**, 392  
**highlight math style**, 392  
**hyperlink**, 225  
**hyperlink interior**, 226  
**hyperlink node**, 226  
**hyperlink title**, 226  
**hyperref**, 225  
**hyperref interior**, 225  
**hyperref node**, 225  
**hyperref title**, 225  
**hypertarget**, 117  
**hyperurl**, 226  
**hyperurl interior**, 226  
**hyperurl node**, 226  
**hyperurl title**, 226  
**hyperurl\***, 226  
**hyperurl\* interior**, 226  
**hyperurl\* node**, 226  
**hyperurl\* title**, 226  
**hyphenationfix**, 111  
**if odd page**, 118  
**if odd page or oneside**, 118  
**if odd page or oneside\***, 119  
**if odd page\***, 119  
**IfBlankF**, 124  
**IfBlankT**, 124  
**IfBlankTF**, 124  
**IfBooleanF**, 126  
**IfBooleanT**, 126  
**IfBooleanTF**, 126  
**IfEmptyF**, 124  
**IfEmptyT**, 124  
**IfEmptyTF**, 124  
**IfNoValueF**, 125  
**IfNoValueT**, 125  
**IfNoValueTF**, 125  
**IfValueF**, 125  
**IfValueT**, 125  
**IfValueTF**, 125  
**ignore nobreak**, 96  
**image comment**, 349  
**index**, 117  
**index actual**, 522  
**index annotate**, 522  
**index colorize**, 522  
**index command**, 521  
**index command name**, 521  
**index default settings**, 522  
**index format**, 522  
**index gather all**, 522  
**index gather colors**, 522  
**index gather commands**, 522  
**index gather counters**, 522  
**index gather environments**, 522  
**index gather keys**, 522  
**index gather lengths**, 522  
**index gather none**, 522  
**index gather paths**, 522  
**index gather values**, 522  
**index german settings**, 522  
**index key formatter**, 512  
**index keys formatter**, 512  
**index level**, 522  
**index quote**, 522  
**index\***, 117  
**inherit height**, 64  
**interior code**, 162  
**interior code app**, 482  
**interior code pre**, 482  
**interior empty**, 162  
**interior engine**, 159  
**interior hidden**, 174  
**interior style**, 173  
**interior style image**, 174  
**interior style tile**, 174  
**interior titled code**, 161  
**interior titled code app**, 481  
**interior titled code pre**, 482  
**interior titled empty**, 161

`interior titled engine`, 158  
`invisible`, 28  
`keywords bold`, 521  
`label`, 114  
`label is label`, 114  
`label is zlabel`, 114  
`label separator`, 387  
`label type`, 115  
`left`, 46  
`left skip`, 93  
`left*`, 46  
`lefthand ratio`, 142  
`lefthand width`, 141  
`leftlower`, 47  
`leftright skip`, 93  
`leftrule`, 42  
`lefttitle`, 47  
`leftupper`, 47  
`lifted shadow`, 216  
`lines before break`, 409  
`list entry`, 137  
`list text`, 137  
`listing above comment`, 356  
`listing above text`, 355  
`listing above* comment`, 356  
`listing above* text`, 355  
`listing and comment`, 352  
`listing and text`, 348  
`listing engine`, 348  
`listing file`, 348  
`listing inputencoding`, 344  
`listing only`, 348  
`listing options`, 343  
`listing options app`, 483  
`listing options pre`, 483  
`listing outside comment`, 355  
`listing outside text`, 353  
`listing remove caption`, 344  
`listing side comment`, 354  
`listing side text`, 353  
`listing style`, 343  
`listing utf8`, 345  
`lower separated`, 32  
`lowerbox`, 30  
`marker`, 243  
`math`, 393  
`math lower`, 393  
`math upper`, 393  
`middle`, 50  
`minimum for current equal height group`, 69  
`minimum for equal height group`, 69  
`minipage`, 109  
`minipage boxed title`, 189  
`minipage boxed title*`, 189  
`minted language`, 346  
`minted options`, 346  
`minted options app`, 483  
`minted options pre`, 483  
`minted style`, 347  
`move upwards`, 102  
`move upwards*`, 102  
`nameref`, 116  
`natural height`, 60  
`nirvana`, 127  
`no borderline`, 205  
`no boxed title style`, 188  
`no extras`, 415  
`no extras first`, 415  
`no extras last`, 415  
`no extras middle`, 415  
`no extras title after break`, 416  
`no extras unbroken`, 415  
`no finish`, 224  
`no finish first`, 224  
`no finish last`, 224  
`no finish middle`, 224  
`no finish unbroken`, 224  
`no label type`, 115  
`no listing options`, 343  
`no overlay`, 84  
`no process`, 361  
`no recording`, 151  
`no shadow`, 208  
`no underlay`, 221  
`no underlay boxed title`, 222  
`no underlay first`, 222  
`no underlay last`, 222  
`no underlay middle`, 222  
`no underlay unbroken`, 222  
`no watermark`, 193  
`nobeforeafter`, 90  
`nofloat`, 88  
`noparskip`, 94  
`nophantom`, 114  
`notitle`, 24  
`notitle after break`, 409  
`octagon arc`, 44  
`on line`, 112  
`only`, 290  
`opacityback`, 58  
`opacitybacklower`, 249  
`opacitybacktitle`, 58  
`opacityfill`, 58  
`opacityframe`, 58  
`opacitylower`, 59  
`opacitytext`, 59  
`opacitytitle`, 59  
`opacityupper`, 59  
`outer arc`, 45  
`overlaplower`, 250  
`overlay`, 83  
`overlay app`, 476  
`overlay broken`, 84  
`overlay broken app`, 477  
`overlay broken pre`, 477  
`overlay first`, 84  
`overlay first and middle`, 84

overlay first and middle app, 477  
 overlay first and middle pre, 477  
 overlay first app, 476  
 overlay first pre, 476  
 overlay last, 84  
 overlay last app, 477  
 overlay last pre, 477  
 overlay middle, 84  
 overlay middle and last, 84  
 overlay middle and last app, 477  
 overlay middle and last pre, 477  
 overlay middle app, 477  
 overlay middle pre, 477  
 overlay pre, 476  
 overlay unbroken, 84  
 overlay unbroken and first, 84  
 overlay unbroken and first app, 477  
 overlay unbroken and first pre, 477  
 overlay unbroken and last, 84  
 overlay unbroken and last app, 477  
 overlay unbroken and last pre, 477  
 overlay unbroken app, 476  
 overlay unbroken pre, 476  
 oversize, 52  
 pad after break, 413  
 pad at break, 413  
 pad at break\*, 413  
 pad before break, 413  
 pad before break\*, 413  
 page ref formatter, 521  
 parbox, 110  
 parfillskip restore, 96  
 parskip, 94  
 pdf comment, 351  
 pdf extension, 352  
 phantom, 114  
 phantomlabel, 114  
 placeholder, 455  
 process code, 361  
 raster after skip, 319  
 raster before skip, 319  
 raster column n, 323  
 raster column skip, 320  
 raster columns, 317  
 raster equal height, 322  
 raster equal height group, 322  
 raster equal skip, 319  
 raster even column, 323  
 raster even number, 324  
 raster even row, 324  
 raster every box, 323  
 raster force size, 323  
 raster halign, 321  
 raster height, 319  
 raster left skip, 320  
 raster multicolumn, 325  
 raster multirow, 326  
 raster number n, 324  
 raster odd column, 323  
 raster odd number, 324  
 raster odd row, 323  
 raster reset, 323  
 raster right skip, 320  
 raster row m, 324  
 raster row m column n, 324  
 raster row skip, 320  
 raster rows, 317  
 raster valign, 321  
 raster width, 317  
 raster width center, 318  
 raster width flush left, 318  
 raster width flush right, 318  
 record, 151  
 redirectlowerto, 31  
 remake, 122  
 remember, 219  
 remember as, 220  
 reset, 123  
 reset and store to box array, 436  
 reset box array, 433  
 right, 47  
 right skip, 93  
 right\*, 48  
 righthand ratio, 142  
 righthand width, 141  
 rightlower, 49  
 rightrule, 42  
 righttitle, 48  
 rightupper, 48  
 rotate, 219  
 rounded corners, 56  
 run arara, 363  
 run biber, 363  
 run bibtex, 363  
 run dvips, 363  
 run latex, 363  
 run latex-dev, 363  
 run latexmk, 363  
 run lualatex, 363  
 run lualatex-dev, 363  
 run makeindex, 363  
 run pdflatex, 361  
 run pdflatex-dev, 363  
 run ps2pdf, 364  
 run system command, 361  
 run xelatex, 363  
 run xelatex-dev, 363  
 savedelimiter, 33  
 savelowerto, 31  
 saveto, 29  
 scale, 219  
 segmentation at break, 414  
 segmentation code, 162  
 segmentation code app, 482  
 segmentation code pre, 482  
 segmentation empty, 162  
 segmentation engine, 159  
 segmentation hidden, 175

segmentation style, 175  
 separator sign, 384  
 separator sign colon, 384  
 separator sign dash, 384  
 separator sign none, 384  
 set alt, 292  
 set temporal, 292  
 shadow, 214  
 sharp corners, 55  
 sharpish corners, 56  
 shield externalize, 122  
 short title, 116  
 show bounding box, 205  
 shrink break goal, 411  
 shrink tight, 104  
 sidebyside, 138  
 sidebyside adapt, 145  
 sidebyside align, 139  
 sidebyside gap, 141  
 sidebyside switch, 147  
 size, 51  
 skin, 157  
 skin first, 157  
 skin first is subskin of, 164  
 skin last, 157  
 skin last is subskin of, 164  
 skin middle, 157  
 skin middle is subskin of, 164  
 smart shadow arc, 216  
 space, 65  
 space to, 66  
 space to both, 66  
 space to lower, 65  
 space to upper, 65  
 spartan, 279  
 split, 67  
 spread, 103  
 spread downwards, 103  
 spread inwards, 102  
 spread outwards, 102  
 spread sideways, 103  
 spread upwards, 103  
 spread upwards\*, 103  
 square, 65  
 squeezed title, 25  
 squeezed title\*, 25  
 standard, 233  
 standard jigsaw, 234  
 step, 115  
 step and label, 115  
 store to box array, 434  
 subtitle style, 27  
 tabulars, 77  
 tabulars\*, 77  
 tabularx, 78  
 tabularx\*, 78  
 tcbimage comment, 350  
 tcbox raise, 112  
 tcbox raise base, 112  
 tcbox width, 113  
 tempfile, 111  
 temporal, 292  
 terminator sign, 386  
 terminator sign colon, 387  
 terminator sign dash, 387  
 terminator sign none, 387  
 text above listing, 356  
 text above\* listing, 356  
 text and listing, 348  
 text fill, 76  
 text height, 61  
 text only, 349  
 text outside listing, 354  
 text side listing, 353  
 text width, 41  
 theorem, 391  
 theorem full label supplement, 388  
 theorem hanging indent, 389  
 theorem label supplement, 388  
 theorem name, 390  
 theorem name and number, 390  
 theorem number, 390  
 theorem number and name, 390  
 theorem style, 397  
 tikz, 218  
 tikz lower, 79  
 tikz reset, 218  
 tikz upper, 79  
 tikznode, 80  
 tikznode boxed title, 190  
 tikznode lower, 80  
 tikznode upper, 80  
 tile, 258  
 title, 24  
 title after break, 409  
 title code, 163  
 title code app, 482  
 title code pre, 482  
 title empty, 163  
 title engine, 159  
 title filled, 34  
 title hidden, 176  
 title style, 175  
 title style image, 176  
 title style tile, 176  
 titlebox, 25  
 titlerule, 43  
 titlerule style, 177  
 toggle enlargement, 101  
 toggle left and right, 53  
 top, 49  
 toprule, 42  
 toprule at break, 413  
 topsep at break, 413  
 toptitle, 49  
 unbreakable, 409  
 underlay, 221  
 underlay boxed title, 222

underlay boxed title pre, 480  
 underlay broken, 222  
 underlay broken pre, 480  
 underlay first, 222  
 underlay first and middle, 222  
 underlay first and middle pre, 480  
 underlay first pre, 480  
 underlay last, 222  
 underlay last pre, 480  
 underlay middle, 222  
 underlay middle and last, 222  
 underlay middle and last pre, 480  
 underlay middle pre, 480  
 underlay pre, 480  
 underlay raised fading vignette, 307  
 underlay raised shading vignette, 307  
 underlay shade in vignette, 307  
 underlay unbroken, 222  
 underlay unbroken and first, 222  
 underlay unbroken and first pre, 480  
 underlay unbroken and last, 222  
 underlay unbroken and last pre, 480  
 underlay unbroken pre, 480  
 underlay vignette, 306  
 upperbox, 28  
 use alt, 292  
 use color stack, 411  
 use height from group, 70  
 use temporal, 292  
 valign, 40  
 valign lower, 40  
 valign scale limit, 40  
 valign upper, 40  
 varwidth boxed title, 190  
 varwidth boxed title\*, 190  
 varwidth upper, 80  
 verbatim, 112  
 verbatim ignore indentation at end, 150  
 verbatim ignore percent, 149  
 vfill before first, 414  
 visible, 28  
 void, 127  
 watermark color, 196  
 watermark graphics, 192  
 watermark graphics app, 479  
 watermark graphics app on, 479  
 watermark graphics on, 192  
 watermark graphics pre, 479  
 watermark graphics pre on, 479  
 watermark opacity, 194  
 watermark overzoom, 195  
 watermark shrink, 195  
 watermark stretch, 196  
 watermark text, 191  
 watermark text app, 478  
 watermark text on, 191  
 watermark text pre, 478  
 watermark text pre on, 478  
 watermark tikz, 193  
 watermark tikz app, 479  
 watermark tikz app on, 479  
 watermark tikz on, 193  
 watermark tikz pre, 479  
 watermark tikz pre on, 479  
 watermark zoom, 194  
 widget, 266  
 width, 41  
**/tcb/boxtitle/**  
 xshift, 183  
 yshift, 183  
 yshift\*, 183  
 yshifttext, 183  
**/tcb/doclang/**  
 color, 524  
 colors, 524  
 commands, 524  
 counter, 524  
 counters, 524  
 environment, 524  
 environment content, 524  
 environments, 524  
 index, 524  
 key, 524  
 keys, 524  
 length, 524  
 lengths, 524  
 new, 524  
 pageshort, 524  
 path, 524  
 paths, 524  
 updated, 524  
 value, 525  
 values, 525  
**/tcb/external/**  
 -, 486  
 !, 486  
 clear preamble, 493  
 clear preclass, 493  
 compiler, 492  
 environment, 492  
 environment with percent, 492  
 externalize, 486  
 force remake, 486  
 input source on error, 492  
 minipage, 492  
 name, 488  
 PassOptionsToClass, 493  
 PassOptionsToPackage, 493  
 plain, 492  
 preamble, 493  
 preamble tcbset, 493  
 preclass, 493  
 prefix, 486

```

runner, 486
runs, 492
safety, 492
/tcb/library/
  all, 10
  breakable, 9
  documentation, 10
  external, 10
  fitting, 9
  hooks, 9
  listings, 9
  listingsutf8, 9
  magazine, 9
  many, 10
  minted, 9
  most, 10
  poster, 9
  raster, 9
  skins, 9
  theorems, 9
  vignette, 9
  xparsse, 10
/tcb/new/
  auto counter, 128
  blend into, 132
  Crefname, 131
  crefname, 131
  list inside, 135
  list type, 135
  no counter, 129
  number format, 130
  number freestyle, 130
  number within, 130
  reset counter on overlays, 129
  use counter, 129
  use counter from, 129
  use counter*, 129
/tcb/poster/
  colspacing, 446
  columns, 446
  height, 446
  prefix, 446
  rows, 446
  rowspacing, 446
  showframe, 446
  spacing, 446
  width, 446
/tcb/posterloc/
  above, 452
  at, 453
  below, 452
  between, 453
  column, 450
  column*, 450
  fixed height, 451
  name, 450
  row, 451
  rowspan, 451
  sequence, 454
  span, 451
  xshift, 455
  yshift, 456
/tcb/posterset/
  boxes, 448
  coverage, 447
  fontsize, 448
  no coverage, 447
  poster, 446
/tcb/vig/
  base color, 302
  color from, 302
  draw method, 303
  east size, 300
  east style, 301
  fade in, 304
  fade out, 304
  horizontal size, 301
  inside node, 299
  lower left corner, 299
  lowered color, 302
  north size, 300
  north style, 301
  outside node, 300
  over node, 300
  over node offset, 300
  raised color, 302
  scope, 302
  semi fade in, 304
  semi fade out, 304
  size, 301
  south size, 300
  south style, 301
  upper right corner, 299
  vertical size, 301
  west size, 300
  west style, 302
  xmax, 299
  xmin, 299
  ymax, 299
  ymin, 299
/tikz/
  tcb fill frame, 178
  tcb fill interior, 178
  tcb fill lower bicolor, 179
  tcb fill title, 178
  keys key, 524
  Keys (l3keys)
    fooexpl/
      foo expl, 512
  Keys (pgfkeys)
    /foopgf/
      foo pgf, 512
  keywords bold key, 521
  label key, 114
  label is label key, 114
  label is xlabel key, 114
  label separator key, 387
  label type key, 115

```

**landscape** value, 287  
**landscape\*** value, 287  
**last** value, 191–193, 414  
**left** key, 46  
**left** value, 37, 145, 321  
**left skip** key, 93  
**left\*** key, 46  
**lefthand ratio** key, 142  
**lefthand width** key, 141  
**leftlower** key, 47  
**leftright skip** key, 93  
**leftrule** key, 42  
**lefttitle** key, 47  
**leftupper** key, 47  
**length** key, 524  
Lengths  
    \foolength, 504  
**lengths** key, 524  
**lifted shadow** key, 216  
**lines before break** key, 409  
**list entry** key, 137  
**list inside** key, 135  
**list text** key, 137  
**list type** key, 135  
**listing above comment** key, 356  
**listing above text** key, 355  
**listing above\* comment** key, 356  
**listing above\* text** key, 355  
**listing and comment** key, 352  
**listing and text** key, 348  
**listing engine** key, 348  
**listing file** key, 348  
**listing inputencoding** key, 344  
**listing only** key, 348  
**listing options** key, 343  
**listing options app** key, 483  
**listing options pre** key, 483  
**listing outside comment** key, 355  
**listing outside text** key, 353  
**listing remove caption** key, 344  
**listing side comment** key, 354  
**listing side text** key, 353  
**listing style** key, 343  
**listing utf8** key, 345  
**listings** key, 9  
**listings** value, 132, 348  
**listingsutf8** key, 9  
**lower left corner** key, 299  
**lower separated** key, 32  
**lowerbox** key, 30  
**lowered color** key, 302  
  
**magazine** key, 9  
**many** key, 10  
\barmarg, 504  
**margin** value, 399  
**margin apart** value, 399  
**margin break** value, 399  
**marker** key, 243  
**math** key, 393  
  
**math lower** key, 393  
**math upper** key, 393  
**maximum** value, 63  
\meta, 504  
**middle** key, 50  
**middle** value, 191–193, 414  
**middle and last** value, 191–193, 414  
**minimal** value, 51  
**minimum center** value, 113  
**minimum for current equal height group**  
    key, 69  
**minimum for equal height group** key, 69  
**minimum left** value, 113  
**minimum right** value, 113  
**minipage** key, 109, 492  
**minipage** value, 109, 314  
**minipage boxed title** key, 189  
**minipage boxed title\*** key, 189  
**minted** key, 9  
**minted** value, 348  
**minted language** key, 346  
**minted options** key, 346  
**minted options app** key, 483  
**minted options pre** key, 483  
**minted style** key, 347  
**most** key, 10  
**move upwards** key, 102  
**move upwards\*** key, 102  
**myKey** key, 517  
  
**name** key, 450, 488  
**nameref** key, 116  
**natural height** key, 60  
**new** key, 524  
\newboxarray, 433  
\newtcboxexternalizeenvironment, 494  
\newtcboxexternalizetcolorbox, 494  
\NewTCBInputListing, 342  
\newtcbinputlisting, 341  
\NewTCBListing, 339  
\newtcblisting, 337  
\NewTCBox, 21  
\newtcbox, 20  
\NewTCBoxFit, 460  
\newtcboxfit, 459  
\NewTcbTheorem, 379  
\newtcbtheorem, 379  
\NewTColorBox, 17  
\newtcolorbox, 16  
\NewTotalTCBox, 22  
\NewTotalTCBoxFit, 461  
\NewTotalTColorBox, 19  
**nirvana** key, 127  
**no borderline** key, 205  
**no boxed title style** key, 188  
**no counter** key, 129  
**no coverage** key, 447  
**no extras** key, 415  
**no extras first** key, 415  
**no extras last** key, 415

**no extras middle** key, 415  
**no extras title after break** key, 416  
**no extras unbroken** key, 415  
**no finish** key, 224  
**no finish first** key, 224  
**no finish last** key, 224  
**no finish middle** key, 224  
**no finish unbroken** key, 224  
**no label type** key, 115  
**no listing options** key, 343  
**no overlay** key, 84  
**no process** key, 361  
**no recording** key, 151  
**no shadow** key, 208  
**no underlay** key, 221  
**no underlay boxed title** key, 222  
**no underlay first** key, 222  
**no underlay last** key, 222  
**no underlay middle** key, 222  
**no underlay unbroken** key, 222  
**no watermark** key, 193  
**nobeforeafter** key, 90  
**nofloat** key, 88  
**none** value, 53, 101, 145, 322, 411, 414  
**noparskip** key, 94  
**nophantom** key, 114  
**normal** value, 51, 184  
**north fading**, 303  
**north** value, 55, 56  
**north size** key, 300  
**north style** key, 301  
**northeast** value, 55, 56  
**northwest** value, 55, 56  
**notitle** key, 24  
**notitle after break** key, 409  
**number format** key, 130  
**number freestyle** key, 130  
**number within** key, 130  
  
**\oarg**, 504  
**octagon arc** key, 44  
**off** value, 470, 522  
**on** value, 470  
**on line** key, 112  
**only** key, 290  
**opacityback** key, 58  
**opacitybacklower** key, 249  
**opacitybacktitle** key, 58  
**opacityfill** key, 58  
**opacityframe** key, 58  
**opacitylower** key, 59  
**opacitytext** key, 59  
**opacitytitle** key, 59  
**opacityupper** key, 59  
**Option** color, 525  
**outer arc** key, 45  
**outside node** key, 300  
**over node** key, 300  
**over node offset** key, 300  
**overlaplower** key, 250  
  
**overlay** key, 83  
**overlay app** key, 476  
**overlay broken** key, 84  
**overlay broken app** key, 477  
**overlay broken pre** key, 477  
**overlay first** key, 84  
**overlay first and middle** key, 84  
**overlay first and middle app** key, 477  
**overlay first and middle pre** key, 477  
**overlay first app** key, 476  
**overlay first pre** key, 476  
**overlay last** key, 84  
**overlay last app** key, 477  
**overlay last pre** key, 477  
**overlay middle** key, 84  
**overlay middle and last** key, 84  
**overlay middle and last app** key, 477  
**overlay middle and last pre** key, 477  
**overlay middle app** key, 477  
**overlay middle pre** key, 477  
**overlay pre** key, 476  
**overlay unbroken** key, 84  
**overlay unbroken and first** key, 84  
**overlay unbroken and first app** key, 477  
**overlay unbroken and first pre** key, 477  
**overlay unbroken and last** key, 84  
**overlay unbroken and last app** key, 477  
**overlay unbroken and last pre** key, 477  
**overlay unbroken app** key, 476  
**overlay unbroken pre** key, 476  
**oversize** key, 52  
  
**pad after break** key, 413  
**pad at break** key, 413  
**pad at break\*** key, 413  
**pad before break** key, 413  
**pad before break\*** key, 413  
**page ref formatter** key, 521  
**pageshort** key, 524  
**parbox** key, 110  
**parfillskip restore** key, 96  
**parskip** key, 94  
**PassOptionsToClass** key, 493  
**PassOptionsToPackage** key, 493  
**path** key, 524  
**path** value, 158, 159  
**Path operations**  
    **foo path (horizontal then vertical)**,  
        513  
    **fooop**, 502  
**pathfirst** value, 158, 159  
**pathfirstjigsaw** value, 158  
**pathjigsaw** value, 158  
**pathlast** value, 158, 159  
**pathlastjigsaw** value, 158  
**pathmiddle** value, 158, 159  
**pathmiddlejigsaw** value, 158  
**paths** key, 524  
**\pbarg**, 505  
**pdf comment** key, 351

**pdf extension** key, 352  
**\pdfpages**, 286  
**pgf** value, 522  
**pgfchapter** value, 522  
**pgfsection** value, 522  
**phantom** key, 114  
**phantomlabel** key, 114  
**placeholder** key, 455  
**plain** key, 492  
**plain** value, 397  
**plain apart** value, 398  
**portrait** value, 287  
**portrait\*** value, 287  
**poster** key, 9, 446  
**\posterbox**, 449  
**posterboxenv** environment, 449  
**preamble** key, 493  
**preamble tcbset** key, 493  
**preclass** key, 493  
**prefix** key, 446, 486  
**process code** key, 361  
**\ProvideTCBInputListing**, 342  
**\ProvideTCBListing**, 339  
**\ProvideTCBox**, 21  
**\ProvideTCBoxFit**, 460  
**\ProvideTcbTheorem**, 381  
**\ProvideTColorBox**, 18  
**\ProvideTotalTCBox**, 23  
**\ProvideTotalTCBoxFit**, 461  
**\ProvideTotalTColorBox**, 19  
  
**raised color** key, 302  
**raster** key, 9  
**raster after skip** key, 319  
**raster before skip** key, 319  
**raster column n** key, 323  
**raster column skip** key, 320  
**raster columns** key, 317  
**raster equal height** key, 322  
**raster equal height group** key, 322  
**raster equal skip** key, 319  
**raster even column** key, 323  
**raster even number** key, 324  
**raster even row** key, 324  
**raster every box** key, 323  
**raster force size** key, 323  
**raster halign** key, 321  
**raster height** key, 319  
**raster left skip** key, 320  
**raster multicolumn** key, 325  
**raster multirow** key, 326  
**raster number n** key, 324  
**raster odd column** key, 323  
**raster odd number** key, 324  
**raster odd row** key, 323  
**raster reset** key, 323  
**raster right skip** key, 320  
**raster row m** key, 324  
**raster row m column n** key, 324  
**raster row skip** key, 320  
  
**raster rows** key, 317  
**raster valign** key, 321  
**raster width** key, 317  
**raster width center** key, 318  
**raster width flush left** key, 318  
**raster width flush right** key, 318  
**record** key, 151  
**redirectlower** key, 31  
**\refAux**, 509  
**\refAuxcs**, 509  
**\refCom**, 508  
**\refCom\***, 508  
**\refEnv**, 508  
**\refEnv\***, 508  
**\refKey**, 508  
**\refKey\***, 508  
**\refPathOperation**, 509  
**\refPathOperation\***, 509  
**\refPkg**, 509  
**remake** key, 122  
**remember** key, 219  
**remember as** key, 220  
**\renewtcbexternalizeenvironment**, 494  
**\renewtcbexternalizetcolorbox**, 495  
**\RenewTCBInputListing**, 342  
**\renewtcbinputlisting**, 341  
**\RenewTCBListing**, 339  
**\renewtcblisting**, 338  
**\RenewTCBox**, 21  
**\renewtcbox**, 21  
**\RenewTCBoxFit**, 460  
**\renewtcbboxfit**, 459  
**\RenewTcbTheorem**, 381  
**\renewtcbtheorem**, 381  
**\RenewTColorBox**, 18  
**\renewtcolorbox**, 16  
**\RenewTotalTCBox**, 23  
**\RenewTotalTCBoxFit**, 461  
**\RenewTotalTColorBox**, 19  
**reset** key, 123  
**reset and store to box array** key, 436  
**reset box array** key, 433  
**reset counter on overlays** key, 129  
**right** key, 47  
**right** value, 37, 145, 321  
**right skip** key, 93  
**right\*** key, 48  
**righthand ratio** key, 142  
**righthand width** key, 141  
**rightlower** key, 49  
**rightrule** key, 42  
**righttitle** key, 48  
**rightupper** key, 48  
**rotate** key, 219  
**rounded corners** key, 56  
**row** key, 451  
**rows** key, 446  
**rows** value, 322  
**rowspacing** key, 446

**rowspan** key, 451  
**run arara** key, 363  
**run biber** key, 363  
**run bibtex** key, 363  
**run dvips** key, 363  
**run latex** key, 363  
**run latex-dev** key, 363  
**run latexmk** key, 363  
**run lualatex** key, 363  
**run lualatex-dev** key, 363  
**run makeindex** key, 363  
**run pdflatex** key, 361  
**run pdflatex-dev** key, 363  
**run ps2pdf** key, 364  
**run system command** key, 361  
**run xelatex** key, 363  
**run xelatex-dev** key, 363  
**runner** key, 486  
**runs** key, 492  
  
**safety** key, 492  
**\sarg**, 505  
**savedelimiter** key, 33  
**savelowerto** key, 31  
**saveto** key, 29  
**scale** key, 219  
**scale** value, 40  
**scale\*** value, 40  
**scope** key, 302  
**segmentation at break** key, 414  
**segmentation code** key, 162  
**segmentation code app** key, 482  
**segmentation code pre** key, 482  
**segmentation empty** key, 162  
**segmentation engine** key, 159  
**segmentation hidden** key, 175  
**segmentation style** key, 175  
**semi east fading**, 303  
**semi fade in** key, 304  
**semi fade out** key, 304  
**semi north fading**, 303  
**semi south fading**, 303  
**semi west fading**, 303  
**separator sign** key, 384  
**separator sign colon** key, 384  
**separator sign dash** key, 384  
**separator sign none** key, 384  
**sequence** key, 454  
**set alt** key, 292  
**set temporal** key, 292  
**shadow** key, 214  
**sharp corners** key, 55  
**sharpish corners** key, 56  
**shield externalize** key, 122  
**short title** key, 116  
**show bounding box** key, 205  
**showframe** key, 446  
**shrink break goal** key, 411  
**shrink tight** key, 104  
**sidebyside** key, 138  
  
**sidebyside adapt** key, 145  
**sidebyside align** key, 139  
**sidebyside gap** key, 141  
**sidebyside switch** key, 147  
**size** key, 51, 301  
**skin** key, 157  
**skin first** key, 157  
**skin first is subskin of** key, 164  
**skin last** key, 157  
**skin last is subskin of** key, 164  
**skin middle** key, 157  
**skin middle is subskin of** key, 164  
**\skinExampleSet**, 232  
**Skins**  
    **beamer**, 262  
    **beamerfirst**, 264  
    **beamerlast**, 265  
    **beamermiddle**, 264  
    **bicolor**, 247  
    **bicolor jigsaw**, 254  
    **bicolorfirst**, 251  
    **bicolorfirst jigsaw**, 255  
    **bicolorlast**, 253  
    **bicolorlast jigsaw**, 257  
    **bicolormiddle**, 252  
    **bicolormiddle jigsaw**, 256  
    **draft**, 280  
    **empty**, 269  
    **emptyfirst**, 272  
    **emptylast**, 274  
    **emptymiddle**, 273  
    **enhanced**, 235  
    **enhanced jigsaw**, 241  
    **enhancedfirst**, 239  
    **enhancedfirst jigsaw**, 242  
    **enhancedlast**, 240  
    **enhancedlast jigsaw**, 246  
    **enhancedmiddle**, 239  
    **enhancedmiddle jigsaw**, 243  
    **freelance**, 282  
    **freelancefirst**, 282  
    **freelancelast**, 282  
    **freelancemiddle**, 282  
    **spartan**, 279  
    **standard**, 233  
    **standard jigsaw**, 234  
    **tile**, 258  
    **tilefirst**, 259  
    **tilelast**, 261  
    **tilemiddle**, 260  
    **widget**, 266  
    **widgetfirst**, 267  
    **widgetlast**, 268  
    **widgetmiddle**, 267  
**skins** key, 9  
**small** value, 51  
**smart shadow arc** key, 216  
**south** fading, 303  
**south** value, 55, 56

**south size** key, 300  
**south style** key, 301  
**southeast** value, 55, 56  
**southwest** value, 55, 56  
**space** key, 65  
**space to** key, 66  
**space to both** key, 66  
**space to lower** key, 65  
**space to upper** key, 65  
**spacing** key, 446  
**span** key, 451  
**spartan** key, 279  
**spartan Skin**, 279  
**spartan** value, 158, 159  
**split** key, 67  
**spread** key, 103  
**spread downwards** key, 103  
**spread inwards** key, 102  
**spread outwards** key, 102  
**spread sideways** key, 103  
**spread upwards** key, 103  
**spread upwards\*** key, 103  
**square** key, 65  
**squeeze** value, 468  
**squeezed title** key, 25  
**squeezed title\*** key, 25  
**standard** key, 233  
**standard Skin**, 233  
**standard** value, 158, 159, 184, 397  
**standard jigsaw** key, 234  
**standard jigsaw Skin**, 234  
**step** key, 115  
**step and label** key, 115  
**store to box array** key, 434  
**subtitle style** key, 27  
  
**tables** value, 132  
**tabulars** key, 77  
**tabulars\*** key, 77  
**tabularx** key, 78  
**tabularx\*** key, 78  
**tcb fill frame** key, 178  
**tcb fill interior** key, 178  
**tcb fill lower bicolor** key, 179  
**tcb fill title** key, 178  
**\tcbbreak**, 421  
**tcbbreakpart** counter, 408  
**tcbclipframe** environment, 198  
**tcbclipinterior** environment, 200  
**tcbcliptitle** environment, 200  
**tcbcolback** color, 169  
**tcbcolbacklower** color, 169  
**tcbcolbacktitle** color, 169  
**tcbcolframe** color, 169  
**tcbcollower** color, 169  
**tcbcoltitle** color, 169  
**tcbcolupper** color, 169  
**\tcbcontinuedraftmode**, 229  
**\tcbcounter**, 128  
**\tcbdocmarginnote**, 510  
  
**\tcbdocnew**, 510  
**\tcbdocupdated**, 510  
**tcbexternal** environment, 487  
**\tcbEXTERNALIZE**, 486  
**\tcbfitdim**, 458  
**\tcbfitsteps**, 462  
**\tcbfontsize**, 458  
**\tcbheightfromgroup**, 70  
**\tcbheightspace**, 170  
**\tcbhighmath**, 382  
**\tcbhypernode**, 289  
**\tcbifexternal**, 493  
**\tcbiffileprocess**, 495  
**\tcbifoddpage**, 120  
**\tcbifoddpageoroneside**, 120  
**tcbimage comment** key, 350  
**\tcbincludegraphics**, 283  
**\tcbincludepdf**, 285  
**\tcbinputlisting**, 336  
**\tcbinputrecords**, 151  
**\tcbinterruptdraftmode**, 229  
**tcbinvclipframe** environment, 199  
**\tcbitem**, 314  
**tcbitemize** environment, 314  
**tcblayer** counter, 106  
**\tcbline**, 238  
**\tcbline\***, 238  
**tcblisting** environment, 334  
**\tcblistof**, 136  
**\tcblower**, 12  
**\tcbmakelocSubKey**, 507  
**\tcbmakelocSubKeys**, 507  
**tcboutputlisting** environment, 336  
**\tcboverlaplower**, 250  
**\tcbbox**, 14  
**tcbox raise** key, 112  
**tcbox raise base** key, 112  
**tcbox width** key, 113  
**tcboxeditemize** environment, 316  
**tcboxedraster** environment, 315  
**\tcbboxedtitleheight**, 183  
**\tcbboxedtitlewidth**, 183  
**\tcbboxfit**, 457  
**\tcbboxmath**, 382  
**\tcbboxverb**, 15  
**\tcbpatcharcangular**, 288  
**\tcbpatcharcround**, 288  
**tcbposter** environment, 444  
**\tcbpostercolspace**, 445  
**\tcbpostercolumns**, 445  
**\tcbpostercolwidth**, 445  
**\tcbposterheight**, 445  
**\tcbposterrowheight**, 445  
**\tcbposterrrows**, 445  
**\tcbposterrowspace**, 445  
**\tcbposterset**, 445  
**\tcbposterwidth**, 445  
**tcbraster** environment, 313  
**tcbrastercolumn** counter, 313

tcbrastrernum counter, 313  
 tcbrasterrow counter, 313  
 \tcbrecord, 151  
 \tcbsegmentstate, 171  
 \tcbset, 13  
 \tcbsetforeverylayer, 13  
 \tcbsetmacrotoheightofnode, 289  
 \tcbsetmacrotowidthofnode, 289  
 \tcbsetmanagedlayers, 107  
 \tcbsettoheightofnode, 289  
 \tcbsettowidthofnode, 289  
 \tcbsidebyside, 144  
 \tcbstartdraftmode, 229  
 \tcbstartrecording, 151  
 \tcbstopdraftmode, 229  
 \tcbstoprecording, 151  
 \tcbsubskin, 164  
 \tcbsubtitle, 27  
 \tcbtextheight, 171  
 \tcbtextwidth, 170  
 \tcbtitle, 26  
 \tcbtitletext, 26  
 \tcbuselibrary, 9  
 \tcbuselistlisting, 336  
 \tcbuselistingtext, 336  
 \tcbusetemp, 148  
 \tcbusetemplisting, 336  
 tcbverbatimwrite environment, 148  
 \tcbvignette, 298  
 tcbwritetemp environment, 148  
 tcolorbox environment, 12  
 \tcolorboxenvironment, 23  
 tempfile key, 111  
 temporal key, 292  
 terminator sign key, 386  
 terminator sign colon key, 387  
 terminator sign dash key, 387  
 terminator sign none key, 387  
 text above listing key, 356  
 text above\* listing key, 356  
 text and listing key, 348  
 text fill key, 76  
 text height key, 61  
 text only key, 349  
 text outside listing key, 354  
 text side listing key, 353  
 text width key, 41  
 theorem key, 391  
 theorem full label supplement key, 388  
 theorem hanging indent key, 389  
 theorem label supplement key, 388  
 theorem name key, 390  
 theorem name and number key, 390  
 theorem number key, 390  
 theorem number and name key, 390  
 theorem style key, 397  
 theorems key, 9  
 \thetcbcounter, 128, 129  
 \thetcbrastrernum, 313, 325  
 \thetcboxnumber, 121  
 \thetcboxpage, 121  
 tight value, 51  
 tikz key, 218  
 tikz lower key, 79  
 tikz reset key, 218  
 tikz upper key, 79  
 tikznode key, 80  
 tikznode boxed title key, 190  
 tikznode lower key, 80  
 tikznode upper key, 80  
 tile key, 258  
 tile Skin, 258  
 tilefirst Skin, 259  
 tilelast Skin, 261  
 tilemiddle Skin, 260  
 title key, 24  
 title value, 51, 184  
 title after break key, 409  
 title code key, 163  
 title code app key, 482  
 title code pre key, 482  
 title empty key, 163  
 title engine key, 159  
 title filled key, 34  
 title hidden key, 176  
 title style key, 175  
 title style image key, 176  
 title style tile key, 176  
 titlebox key, 25  
 titlerule key, 43  
 titlerule style key, 177  
 toggle enlargement key, 101  
 toggle left and right key, 53  
 top key, 49  
 top value, 40, 95, 139, 321  
 top seam value, 139  
 toprule key, 42  
 toprule at break key, 413  
 topsep at break key, 413  
 toptitle key, 49  
 true value, 96, 408  
 unbreakable key, 409  
 unbroken value, 191–193  
 unbroken and first value, 191–193  
 underlay key, 221  
 underlay boxed title key, 222  
 underlay boxed title pre key, 480  
 underlay broken key, 222  
 underlay broken pre key, 480  
 underlay first key, 222  
 underlay first and middle key, 222  
 underlay first and middle pre key, 480  
 underlay first pre key, 480  
 underlay last key, 222  
 underlay last pre key, 480  
 underlay middle key, 222  
 underlay middle and last key, 222  
 underlay middle and last pre key, 480

`underlay middle pre` key, 480  
`underlay pre` key, 480  
`underlay raised fading vignette` key, 307  
`underlay raised shading vignette` key, 307  
`underlay shade in vignette` key, 307  
`underlay unbroken` key, 222  
`underlay unbroken and first` key, 222  
`underlay unbroken and first pre` key, 480  
`underlay unbroken and last` key, 222  
`underlay unbroken and last pre` key, 480  
`underlay unbroken pre` key, 480  
`underlay vignette` key, 306  
`unlimited` value, 407, 408  
`updated` key, 524  
`uphill` value, 55, 56  
`upper right corner` key, 299  
`upperbox` key, 28  
`use alt` key, 292  
`use color stack` key, 411  
`use counter` key, 129  
`use counter from` key, 129  
`use counter*` key, 129  
`use height from group` key, 70  
`use temporal` key, 292  
`\useboxarray`, 436  
`\usetcbboxarray`, 437

`valign` key, 40  
`valign lower` key, 40  
`valign scale limit` key, 40  
`valign upper` key, 40  
`value` key, 525

#### Values

`0`, 171  
`1`, 171  
`2`, 171  
`all`, 55, 56, 322, 411, 414  
`areasize`, 468  
`areasize*`, 468  
`as-is`, 287  
`auto`, 113, 389  
`auto limited`, 113  
`base`, 95  
`baselineskip`, 411  
`both`, 145  
`bottom`, 40, 95, 139, 321  
`bottom seam`, 139  
`break`, 398  
`broken`, 191–193  
`center`, 37, 40, 95, 139, 321  
`center seam`, 139  
`change`, 398  
`change apart`, 398  
`change break`, 398  
`change standard`, 397  
`clipped`, 303  
`colon`, 133  
`colon hang`, 133  
`copy`, 184  
`dash`, 133

`dash hang`, 133  
`direct`, 303  
`doc`, 522  
`downhill`, 55, 56  
`east`, 55, 56  
`empty`, 158, 159  
`evenpage`, 53, 101  
`false`, 90, 96, 323, 408  
`fbox`, 51  
`figures`, 132  
`final`, 470  
`first`, 191–193, 414  
`first and middle`, 191, 414  
`fitbox`, 109  
`flush center`, 37, 39, 40  
`flush left`, 37, 39, 40  
`flush right`, 37, 39, 40  
`fontsize`, 468  
`fontsize*`, 468  
`forced`, 53, 101  
`forced center`, 113  
`forced left`, 113  
`forced right`, 113  
`freelance`, 158, 159  
`hbox`, 109  
`hybrid`, 468  
`hybrid*`, 468  
`ignored`, 30, 31  
`invisible`, 25, 28, 30  
`justify`, 37  
`landscape`, 287  
`landscape*`, 287  
`last`, 191–193, 414  
`left`, 37, 145, 321  
`listings`, 132, 348  
`margin`, 399  
`margin apart`, 399  
`margin break`, 399  
`maximum`, 63  
`middle`, 191–193, 414  
`middle and last`, 191–193, 414  
`minimal`, 51  
`minimum center`, 113  
`minimum left`, 113  
`minimum right`, 113  
`minipage`, 109, 314  
`minted`, 348  
`none`, 53, 101, 145, 322, 411, 414  
`normal`, 51, 184  
`north`, 55, 56  
`northeast`, 55, 56  
`northwest`, 55, 56  
`off`, 470, 522  
`on`, 470  
`path`, 158, 159  
`pathfirst`, 158, 159  
`pathfirstjigsaw`, 158  
`pathjigsaw`, 158  
`pathlast`, 158, 159

`pathlastjigsaw`, 158  
`pathmiddle`, 158, 159  
`pathmiddlejigsaw`, 158  
`pgf`, 522  
`pgfchapter`, 522  
`pgfsection`, 522  
`plain`, 397  
`plain apart`, 398  
`portrait`, 287  
`portrait*`, 287  
`right`, 37, 145, 321  
`rows`, 322  
`scale`, 40  
`scale*`, 40  
`small`, 51  
`south`, 55, 56  
`southeast`, 55, 56  
`southwest`, 55, 56  
`spartan`, 158, 159  
`squeeze`, 468  
`standard`, 158, 159, 184, 397  
`tables`, 132  
`tight`, 51  
`title`, 51, 184  
`top`, 40, 95, 139, 321  
`top seam`, 139  
`true`, 96, 408  
`unbroken`, 191–193  
`unbroken and first`, 191–193  
`unlimited`, 407, 408  
`uphill`, 55, 56  
`visible`, 25, 28, 30  
`west`, 55, 56  
`values` key, 525  
`varwidth boxed title` key, 190  
`varwidth boxed title*` key, 190  
`varwidth upper` key, 80  
`verbatim` key, 112  
`verbatim ignore indentation at end` key, 150  
`verbatim ignore percent` key, 149  
`vertical size` key, 301  
`vfill before first` key, 414  
`vignette` key, 9  
`visible` key, 28  
`visible` value, 25, 28, 30  
`void` key, 127

`watermark color` key, 196  
`watermark graphics` key, 192  
`watermark graphics app` key, 479  
`watermark graphics app on` key, 479  
`watermark graphics on` key, 192  
`watermark graphics pre` key, 479  
`watermark graphics pre on` key, 479  
`watermark opacity` key, 194  
`watermark overzoom` key, 195  
`watermark shrink` key, 195  
`watermark stretch` key, 196  
`watermark text` key, 191  
`watermark text app` key, 478  
`watermark text on` key, 191  
`watermark text pre` key, 478  
`watermark text pre on` key, 478  
`watermark tikz` key, 193  
`watermark tikz app` key, 479  
`watermark tikz app on` key, 479  
`watermark tikz on` key, 193  
`watermark tikz pre` key, 479  
`watermark tikz pre on` key, 479  
`watermark zoom` key, 194  
`west fading`, 303  
`west value`, 55, 56  
`west size` key, 300  
`west style` key, 302  
`widget` key, 266  
`widget Skin`, 266  
`widgetfirst Skin`, 267  
`widgetlast Skin`, 268  
`widgetmiddle Skin`, 267  
`width` key, 41, 446

`xmax` key, 299  
`xmin` key, 299  
`xparse` key, 10  
`xshift` key, 183, 455

`ymax` key, 299  
`ymin` key, 299  
`yshift` key, 183, 456  
`yshift*` key, 183  
`yshifttext` key, 183